

US Army Corps
of Engineers


*Northwestern Division
Missouri River Basin
Water Management Division*

Final

AOP

2008-2009

*Missouri River Mainstem System
2008-2009 Annual Operating Plan*

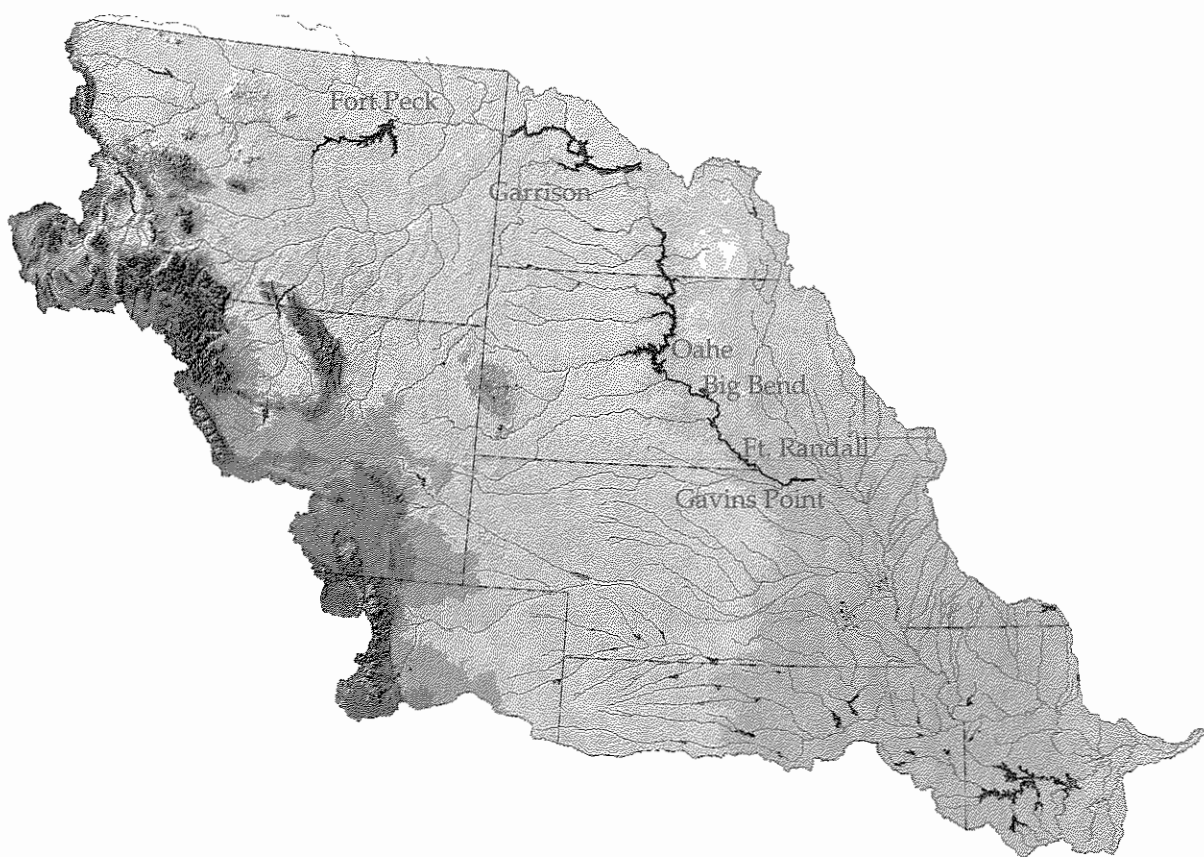

*Annual Operating Plan Process
56 Years Serving the Missouri River Basin*

December 2008



DEPARTMENT OF THE ARMY
CORPS OF ENGINEERS, NORTHWESTERN DIVISION
PO BOX 2870
PORTLAND OR 97208-2870

REPLY TO
ATTENTION OF

DEC 30 2008

Division Commander

Dear Stakeholders and Concerned Citizens:

This Annual Operating Plan (AOP) presents the Corps of Engineers' regulation of the Missouri River Mainstem Reservoir System (System) through December 2009. The AOP is based on water management guidelines designed to meet the reservoir regulation objectives of the existing Missouri River Master Water Control Manual (Master Manual) updated in March 2006.

The AOP information provides a framework for the development of detailed monthly, weekly, and daily regulation schedules for the System's six individual dams during the upcoming year to serve its Congressionally-authorized project purposes. System water management is provided by my staff at the Missouri River Basin Water Management Division, Northwestern Division, U.S. Army Corps of Engineers, located in Omaha, Nebraska.

A draft of this AOP was made available to the public in September 2008. A report presenting Draft AOP meeting comments and including copies of all the comment letters received is available upon request.

Runoff into the Missouri River basin returned to near normal this year, but water stored in the System is still below normal levels due to previous drought years. At these storage levels, water conservation measures remain an important consideration. With more normal runoff this past year, System storage has improved to the point that the AOP indicates the implementation of a bimodal spring pulse (March and May) from Gavins Point Dam in 2009 under all runoff scenarios, downstream flow conditions permitting. These pulses are consistent with those outlined in the 2003 Amended Biological Opinion and the 2006 Master Manual.

We realize that the benefits provided by the System are vitally important to the Nation and the people that live and work in the basin. We believe that the continued implementation of the revised Master Manual, and more specifically this AOP, will result in an appropriate balance of benefits provided to all of the people who rely on the System. Thank you for your interest in the regulation of the System.

Sincerely,

William E. Rapp, P.E.
Brigadier General, U.S. Army
Division Commander

MISSOURI RIVER MAINSTEM RESERVOIR SYSTEM

Annual Operating Plan 2008 - 2009

List of Tables.....	ii
List of Plates.....	ii
List of Abbreviations	iii
Definition of Terms.....	v
I. FOREWORD	1
II. PURPOSE AND SCOPE.....	2
III. MAINSTEM MASTER MANUAL AND ESA CONSULTATIONS	3
IV. FUTURE RUNOFF: AUGUST 2008 ~ DECEMBER 2009.....	3
V. ANNUAL OPERATING PLAN FOR 2008-2009	6
A. General.....	6
B. 2008-2009 AOP Simulations	6
C. Regulation for the Balance of 2008 Nav. Season and Fall of 2008....	10
D. Regulation Plan for Winter 2008-2009.....	11
E. Regulation During the 2009 Navigation Season.....	13
F. Regulation Activities for T&E Species and Fish Propagation	15
G. Regulation Activities for Historical and Cultural Properties	18
VI. SUMMARY OF RESULTS EXPECTED IN 2009	20
A. Flood Control.....	20
B. Water Supply and Water Quality Control	21
C. Irrigation.....	22
D. Navigation.....	22
E. Power	23
F. Recreation, Fish and Wildlife	23
G. Historic and Cultural Properties.....	23
H. System Storage	25
I. Summary of Water Use by Functions	26
VII. TENTATIVE PROJECTION OF REGULATION THROUGH FEBRUARY 2015	28
A. Median Runoff.....	28
B. Lower Quartile Runoff	33
C. Lower Decile Runoff.....	33

TABLES

I	Natural and Net Runoff at Sioux City	5
II	Navigation Service Support for the 2009 Season.....	14
III	Summary of 2008-2009 AOP Studies.....	20
IV	Peaking Capability and Sales	24
V	Energy Generation and Sales	24
VI	Anticipated December 31, 2009 System Storage.....	26
VII	Missouri River Mainstem System Water Use for Calendar Years 2007, 2008, and 2009 Above Sioux City, Iowa.....	27
VIII	Navigation Service Support, Spring Pulses, Unbalancing - AOP Extension Studies	29
IX	Median Extension Studies - Criteria Considered in the Modeling Process	30
X	Lower Quartile Extension Studies - Criteria Considered in the Modeling Process	31
XI	Lower Decile Extension Studies - Criteria Considered in the Modeling Process	32

PLATES

1	Missouri River Basin Map
2	Summary of Engineering Data
3	Summary of Master Manual Criteria
4	System Storage and Fort Peck Elevations
5	Garrison and Oahe Elevations
6	System Storage
7	Gavins Point Releases
8	Fort Peck Elevations and Releases
9	Garrison Elevations and Releases
10	Oahe Elevations and Releases
11	Fort Randall Elevations and Releases
12	Reservoir Release and Unregulated Flow
13	System Gross Capability and Average Monthly Generation
14	American Indian Reservations

ABBREVIATIONS

AOP	- annual operating plan
ac.ft.	- acre-feet
ACHP	- Advisory Council on Historic Preservation
AF	- acre-feet
B	- Billion
BiOp	- Biological Opinion
BOR	- Bureau of Reclamation
cfs	- cubic feet per second
COE	- Corps of Engineers
CY	- calendar year (January 1 to December 31)
elev	- elevation
ESA	- Endangered Species Act
ft	- feet
FTT	- Flow-to-Target
FY	- fiscal year (October 1 to September 30)
GIS	- Geographic Information System
GWh	- gigawatt hour
ISP	- initial starting point
KAF	- 1,000 acre-feet
Kcfs	- 1,000 cubic feet per second
kW	- kilowatt
kWh	- kilowatt hour
M	- million
MAF	- million acre-feet
MRBA	- Missouri River Basin Association
MRNRC	- Missouri River Natural Resources Committee
msl	- mean sea level
MW	- megawatt
MWh	- megawatt hour
NEPA	- National Environmental Policy Act
plover	- piping plover
pp	- powerplant
PA	- Programmatic Agreement
P-S MBP	- Pick-Sloan Missouri Basin Program
RCC	- Reservoir Control Center
RM	- river mile
RPA	- Reasonable and Prudent Alternative
SHPO	- State Historic Preservation Officers
SR	- Steady Release
tern	- interior least tern

T&E	-	Threatened and Endangered
THPO	-	Tribal Historic Preservation Officers
tw	-	tailwater
USFWS	-	United States Fish and Wildlife Service
USGS	-	United States Geological Survey
WY	-	water year
yr	-	year

DEFINITION OF TERMS

Acre-foot (AF, ac-ft) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or 325,850 gallons.

Cubic foot per second (cfs) is the rate of discharge representing a volume of 1 cubic foot passing a given point during 1 second and is equivalent to approximately 7.48 gallons per second or 448.8 gallons per minute. The volume of water represented by a flow of 1 cubic foot per second for 24 hours is equivalent to 86,400 cubic feet, approximately 1.983 acre-feet, or 646,272 gallons.

Discharge is the volume of water (or more broadly, volume of fluid plus suspended sediment) that passes a given point within a given period of time.

Drainage area of a stream at a specific location is that area, measured in a horizontal plane, enclosed by a topographic divide from which direct surface runoff from precipitation normally drains by gravity into the river above the specified point. Figures of drainage area given herein include all closed basins, or noncontributing areas, within the area unless otherwise noted.

Drainage basin is a part of the surface of the earth that is occupied by drainage system, which consists of a surface stream or body of impounded surface water together with all tributary surface streams and bodies of impounded water.

Gaging station is a particular site on a stream, canal, lake, or reservoir where systematic observations of hydrologic data are obtained.

Runoff in inches shows the depth to which the drainage area would be covered if all the runoff for a given time period were uniformly distributed on it.

Streamflow is the discharge that occurs in a natural channel. Although the term "discharge" can be applied to the flow of a canal, the word "streamflow" uniquely describes the discharge in a surface stream course. The term "streamflow" is more general than "runoff" as streamflow may be applied to discharge whether or not it is affected by diversion or regulation.

This page is intentionally left blank.

MISSOURI RIVER MAINSTEM RESERVOIR SYSTEM

Annual Operating Plan 2008 – 2009

I. FOREWORD

This Annual Operating Plan (AOP) presents pertinent information and plans for regulating the Missouri River Mainstem Reservoir System (System) through December 2009 under widely varying water supply conditions. It provides a framework for the development of detailed monthly, weekly, and daily regulation schedules for the System's six individual dams during the coming year to serve the Congressionally authorized project purposes; to fulfill the Corps' responsibilities to Native American Tribes; and to comply with environmental laws, including the Endangered Species Act (ESA). Regulation is directed by the Reservoir Control Center in the Missouri River Basin Water Management Division, Northwestern Division, U. S. Army Corps of Engineers (Corps). A map of the Missouri River basin is shown on *Plate 1* and the summary of engineering data for the six individual Mainstem projects and System is shown on *Plate 2*.

This plan may require adjustments such as when substantial departures from expected runoff occur; to meet emergencies including short-term intrasystem adjustments to protect human health and safety during periods of extended drought to maintain minimum river or reservoir levels to keep intakes operational, and adjustments in reservoir releases or reservoir levels to prevent loss of historic and cultural properties; or to meet the provisions of applicable laws, including the ESA. These adjustments would be made to the extent possible after evaluating impacts to all System uses, would generally be short term in nature and would continue only until the issue is resolved.

This document provides the plan for future regulation of the System. Other documents that may be of interest include the recently revised "System Description and Regulation" report dated November 2007 or the "Summary of Actual Calendar Year 2007 Regulation," dated April 2008. Both reports are currently available at the "Reports and Publications" link on our web site at: www.nwd-mr.usace.army.mil/rcc, or you may contact the Missouri River Basin Water Management Division at 1616 Capitol Avenue, Suite 365, Omaha, Nebraska 68102-4909, phone (402) 996-3841 for copies. The "Summary of Actual Calendar Year 2008 Regulation" will be available at the same site in April of 2009.

II. PURPOSE AND SCOPE

Beginning in 1953, projected System reservoir regulation for the year ahead was developed annually as a basis for advance coordination with the various interested Federal, State, and local agencies and private citizens. Also beginning in 1953, a coordinating committee was organized to make recommendations on each upcoming year's System regulation. The Coordinating Committee on Missouri River Mainstem Reservoir Operations held meetings semiannually until 1981 and provided recommendations to the Corps. In 1982, the Committee was dissolved because it did not conform to the provisions of the Federal Advisory Committee Act. Since 1982, to continue providing a forum for public participation, one or more open public meetings are held semiannually in the spring and fall. The fall public meeting is conducted to take public input on a draft of the AOP, which typically is published in early October each year. The spring meetings are conducted to update the public on the current hydrologic conditions and projected System regulation for the remainder of the year as it relates to implementing the Final AOP.

Under the terms of Stipulation 18 of the March 2004 "Programmatic Agreement for the Operation and Management of the Missouri River Main Stem System for Compliance with the National Historic Preservation Act, as amended" (PA) the Corps has agreed to consult/meet with the affected Tribes and Tribal Historic Preservation Officers (THPO's), State Historic Preservation Officers (SHPO's), the Advisory Council on Historic Preservation (ACHP) and other parties on the draft AOP. The purpose of this consultation/meeting is to determine whether operational changes are likely to cause changes to the nature, location or severity of adverse effects to historic properties or to the types of historic properties affected and whether amendments to the Corps Cultural Resources Management Plans and Five-Year Plan are warranted in order to better address such effects to historic properties. During 2006 the Corps worked with the affected Tribes to establish processes for consultation on AOP's under 36 CFR Part 800, the PA, and Executive Order 13175. The process consists of a series of informational meetings with the Tribes and/or government-to-government consultation with Tribes, as requested. A letter, dated August 27, 2008, was sent to the Tribes offering consultation on the 2008-2009 AOP. Meeting times and locations of the six fall public meetings were also provided. Separate meetings will be scheduled for all Tribes requesting government-to-government consultation. All tribes, whether signatory to the PA or not, may request government-to-government consultation on this and all future AOP's. In addition, the Tribes have reserved water rights to the Missouri River and its major tributaries. In no way does this AOP attempt to define, regulate or quantify water rights or any other rights that the Tribes are entitled to by law/treaty.

The 2008 spring public meetings were held at the following locations and dates: April 15 at Jefferson City and Kansas City, Missouri; April 16 at Nebraska City, Nebraska and Fort Peck, Montana; April 17 at Bismarck, North Dakota and Pierre,

South Dakota. The attendees were given an update regarding the outlook for 2008 runoff and projected System regulation for the remainder of 2008. Six fall public meetings on the Draft 2008-2009 AOP were held: October 14 in Nebraska City, Nebraska; October 15 in Kansas City and Jefferson City, Missouri; October 16 in Fort Peck, Montana and Bismarck, North Dakota; and October 17 in Pierre, South Dakota.

In the spring of 2009, public meetings will be held to discuss the basin's hydrologic conditions and the effects those conditions are expected to have on the implementation of the Final 2008-2009 AOP.

III. MAINSTEM MASTER MANUAL AND ESA CONSULTATIONS

The Missouri River Mainstem Reservoir System Master Water Control Manual (Master Manual) presents the water control plan and operational objectives for the integrated regulation of the System. First published in 1960 and subsequently revised during the 1970's, the Master Manual was revised in March 2004 to include more stringent drought conservation measures. The 2003 Amendment to the 2000 Biological Opinion (2003 Amended BiOp) presented the USFWS' opinion that the regulation of the System would jeopardize the continued existence of the endangered pallid sturgeon. The USFWS provided a Reasonable and Prudent Alternative (RPA) to avoid jeopardy to the pallid sturgeon that included a provision for the Corps to develop a plan to implement a bimodal 'spring pulse' from Gavins Point Dam. Working with the USFWS, Tribes, states and basin stakeholders, the Corps developed technical criteria for the bimodal spring pulse releases. In March 2006 the Master Manual was revised to include technical criteria for a spring pulse.

IV. FUTURE RUNOFF: AUGUST 2008 - DECEMBER 2009

Runoff into the six System reservoirs is typically low and relatively stable during the August-to-February period. The August 1 calendar year runoff forecast is used as input to the Basic reservoir regulation simulation in the AOP studies for the period August 2008 to February 2009. The August 1 runoff forecast for 2008 was 26.3 million acre-feet (MAF). Two other runoff scenarios based on the August 1 runoff forecast were developed for the same period. These are the Upper Basic and Lower basic simulations, which are based on 120 percent and 80 percent of the August 1 runoff forecast, respectively.

Simulations for the March 1, 2009 to February 28, 2010 time period use five statistically derived inflow scenarios based on an analysis of historic water supply. The report that presents the details of the calculations used to develop these inflow scenarios was updated in July 2008 to include 9 additional years of inflow data, which

now extends from 1898 to 2006. Using statistically derived inflow scenarios provides a good range of simulation for dry, average, and wet conditions, and eliminates the need to forecast future precipitation, which is very difficult.

The five statistically derived inflows are identified as the Upper Decile, Upper Quartile, Median, Lower Quartile and Lower Decile runoff conditions. Upper Decile runoff (34.3 MAF) has a 1 in 10 chance of being exceeded, Upper Quartile (30.3 MAF) has a 1 in 4 chance of being exceeded, and Median (24.4 MAF) has a 1 in 2 chance of being exceeded. Lower Quartile runoff (19.3 MAF) has a 1 in 4 chance of the occurrence of less runoff, and Lower Decile (16.2 MAF) has a 1 in 10 chance of the occurrence of less runoff. There is still a 20 percent chance that a runoff condition may occur that has not been simulated; i.e., a 10 percent chance runoff could be lower than Lower Decile, and a 10 percent chance runoff could be greater than Upper Decile.

The Upper Decile and Upper Quartile simulations extend from the end of the Upper Basic simulation through February 2010. Likewise, the Median simulation extends from the end of the Basic simulation, and the Lower Quartile and Lower Decile simulations extend from the end of the Lower Basic simulation through February 2010.

The estimated natural flow at Sioux City, the corresponding post-1949 water use effects, and the net flow available above Sioux City are shown in *Table I*, where water supply conditions are quantified for the period August 2008 through February 2010. The natural water supply for calendar year (CY) 2007 totaled 21.1 MAF.

TABLE I
NATURAL AND NET RUNOFF AT SIOUX CITY
(Volumes in 1,000 Acre-Feet)

	<u>Natural 1/</u>	<u>Post-1949 Depletions</u>	<u>Net 2/</u>
August 2007 through February 2008 (Basic Runoff Scenario)			
Basic	6,900	700	7,600
120% Basic	8,200	800	9,000
80% Basic	5,500	600	6,100
Runoff Year March 2008 through February 2009 (Statistical Analysis of Past Records)			
Upper Decile	34,300	-2,400	31,900
Upper Quartile	30,300	-2,600	27,700
Median	24,400	-2,400	22,000
Lower Quartile	19,300	-2,500	16,800
Lower Decile	16,200	-2,500	13,700

1/ The word "Natural" is used to designate runoff adjusted to the 1949 level of basin development, except that regulation and evaporation effects of the Fort Peck reservoir have also been eliminated during its period of regulation prior to 1949.

2/ The word "Net" represents the total runoff after deduction of the post-1949 irrigation, upstream storage, and other use effects.

V. ANNUAL OPERATING PLAN FOR 2008-2009

A. **General.** The anticipated regulation described in this AOP is designed to meet the regulation objectives presented in the current Master Manual. While some aspects of System and individual project regulation are clearly defined by technical criteria in the Master Manual, for example navigation service level and season length, others such as minimum releases for irrigation and water supply in the reaches between the reservoirs are based on regulation experience and will be adjusted as needed to respond to changing conditions. Consideration has been given to all of the authorized project purposes, to historic and cultural resources and to the needs of threatened and endangered (T&E) species. The recently revised "System Description and Regulation" report provides a concise summary of the primary aspects of System regulation and should be referred to for further information. For ease of use, a summary of the frequently used technical criteria included in the Master Manual is presented on *Plate 3*.

The plan relies on a wealth of regulation experience. Reservoir regulation experience available for preparation of the 2008-2009 AOP includes 13 years of regulation at Fort Peck (1940) by itself, plus 55 years of System experience as Fort Randall (1953), Garrison (1955), Gavins Point (1955), Oahe (1962), and Big Bend (1964) have been brought progressively into System regulation. This regulation experience includes lessons learned during the six consecutive years of drought from 1987 through 1992, the high runoff period that followed, and the current nine-year drought that began in 2000. Runoff during the period 1993 to 1999 was greater than the Upper Quartile level in five of those seven years, including the record 49.0 MAF of runoff in 1997. In addition to the long period of actual System reservoir regulation experience, many background regulation studies for the completed System are available for reference.

B. **2008-2009 AOP Simulations.** AOP simulations for the five runoff scenarios are shown in the final section of this AOP as studies 4 through 8. Due to the ongoing drought, service to all authorized project purposes except flood control will be reduced in the coming year and all water conservation measures available under the Master Manual will be utilized. In summary, the studies provide the following: minimum service flow support during the first part of the navigation season under all runoff scenarios; slightly above minimum to full service flow support after the July 1 System storage check for Median runoff and above; a full length navigation season for Upper Decile and Upper Quartile runoff; a shortened navigation season for Median runoff or below; low winter releases for all but the Upper Decile runoff scenario; low releases in the spring and fall before and after the navigation season; March and May spring pulses from Gavins Point dam; a steady release-flow to target regulation during the tern and plover nesting season; emphasis on Garrison for a steady to rising reservoir level during the forage fish spawn; and reservoir releases and pool levels sufficient to keep all

intakes operational under all runoff scenarios. Numerous other water conservations measures will be implemented if conditions allow including cycling releases from Gavins Point during the early part of the nesting season, only supporting flow targets in reaches being used by commercial navigation, and utilization of the Kansas River projects authorized for Missouri River navigation flow support. Additional details about the studies are provided in the following paragraphs. Results of the simulations are shown in *Plates 4 and 5* for the System storage and the Fort Peck, Garrison and Oahe pool elevations.

Under all runoff scenarios modeled for the AOP, the March 1 and May 1 System storage is above the spring pulse precludes of 40.0 MAF. The peak magnitude of the March pulse is 5,000 cfs over navigation flows. The peak magnitude of the May pulse would be 16,000 cfs under the Upper Decile and Upper Quartile runoff scenarios, 13,900 for Median runoff, 9,800 cfs for Lower Quartile runoff and 9,700 cfs for Lower Decile runoff. The actual peak magnitude of the May pulse will be determined based on the actual System storage and the May 1 runoff forecast. The Master Manual technical criteria includes safeguards to minimize the risk of flooding associated with the spring pulses. Both spring pulses may be reduced or eliminated due to the downstream flow limits, shown on Plate 3, which are well below the channel capacity of the Missouri River. These flow limits are identical to the most restrictive flood control constraints presented in the previous Master Manual and provide a very similar level of flood protection. An additional safeguard is the incorporation of observed and anticipated precipitation into the daily river forecast to provide greater assurance that flows will remain below the downstream flow limits during the duration of the spring pulses. As in 2006, primary consideration will be given to withdrawing the water needed for the May spring pulse from Fort Randall reservoir in 2009, rather than from one or more of the upper three reservoirs. This would avoid further declines at Fort Peck, Garrison and Oahe reservoirs, which are already drawn down substantially due to the ongoing drought. If using Fort Randall in this manner is not feasible, the Corps would then give consideration to distributing the upstream storage reductions due to the May pulse equally among the upper three reservoirs. The Corps will also avoid cycling releases on the declining limb of the May spring pulse if the anticipated level of take of the two protected bird species is not excessive. Prior to implementing the May pulse, the Corps will coordinate with the affected Tribes and States to evaluate the options and determine the best course of action to minimize adverse impacts, including those associated with water quality due to low reservoir levels, water intakes, historic and cultural sites and reservoir fisheries.

It is possible that the 2009 spring pulses from the System could be reduced or eliminated as they travel downstream if there are significant releases being made from downstream Corps tributary reservoir projects. If the releases at these downstream Corps tributary reservoirs can be reduced without undue increased risk to other areas, it will be possible to reduce or eliminate the increase in flows on the Missouri River due

to the spring pulses. This type of regulation was actually implemented in conjunction with the March 2008 spring pulse, which eliminated the pulse as it passed by Kansas City, MO. However, it should be noted that the conditions that would allow for such a regulation are experienced very infrequently, because significant releases from the tributary reservoirs are fairly rare during the spring of the year. This is especially true for the May pulse, which would require more of an adjustment because of the higher magnitude of that pulse.

The March 15 and July 1 System storage checks were used to determine the level of flow support for navigation and other downstream purposes as well as the navigation season length. Minimum service navigation flows are provided for all runoff conditions at the start of the navigation season due to low System storage, however a higher service level is provided for Median runoff and above based on the July 1 System storage check. Application of the July 1 System storage check (*see Plate 3*) also indicated that a full length navigation season would be provided for Upper Decile and Upper Quartile runoff. The lower runoff scenarios show a navigation season shortening ranging from 5 days for Median runoff to 30 days for Lower Quartile and Lower Decile runoff. None of the simulations reach the desired 57.0 MAF System storage level on March 1, 2010.

For modeling purposes in this AOP, the SR-FTT regulation scenario is shown during the 2009 tern and plover nesting season. The monthly average May release used in the simulations was determined by adding the May spring pulse hydrograph to the minimum service release, followed by cycling between the May and June minimum service releases for the remainder of the month to reflect an every third day peaking cycle from Gavins Point. The June release was modeled as a steady release due to the presence of chicks along the river at that time. The long-term average releases (*see Plate 3*) were used for July and August to indicate flowing to target and to reflect an increase in navigation service level for Median runoff and above. Although these modeled Gavins Point releases represent our best estimate of required releases during 2009, actual releases will be based on hydrologic conditions and the availability of habitat at that time. It may also be necessary to cycle releases for flood control regulation during the T&E species' nesting season.

The long-term average Gavins Point releases to meet target flows were used in all the AOP studies for navigation support during the spring and fall months. Based on the September 1 storage check, Gavins Point winter releases were modeled at 12,500 cfs during the 2008-2009 winter season for all runoff scenarios. Prior to 2004, higher winter releases were required for downstream powerplants and water supply intakes, but completed and on-going modification of intakes now permit lower winter releases as a conservation measure when System storage is low. Based on the September 1, 2009 storage check, higher winter releases would be provided only for the Upper Decile runoff scenario during the winter of 2009-2010. Non-winter, non-navigation Gavins

Point releases were modeled at 9,000 cfs as a further water conservation measure as described in the Master Manual, provided downstream tributary flows are adequate to serve water supply requirements. Gavins Point releases will be increased to meet downstream water supply requirements in critical reaches, to the extent reasonably possible, if downstream incremental runoff is low.

The Gavins Point releases shown in this and previous AOPs are estimates based on historic averages and experience. Adjustments are made as necessary in real-time based on hydrologic conditions to meet the Missouri River target flows presented in the Master Manual.

Intrasystem releases are adjusted to best serve the multiple purposes of the projects with special emphasis placed on regulation for non-listed fisheries starting in early April and for T&E bird species beginning in early May and continuing through August. As part of the overall plan to rotate emphasis among the upper three reservoirs during low runoff years, Fort Peck and Oahe were scheduled to be favored during the 2009 forage fish spawn if runoff is not sufficient to keep all three reservoirs rising. However, in response to a request from the Missouri River Association of States and Tribes (MoRAST), emphasis will be given to Garrison from April 20 to May 20, 2009 while also attempting to maintain rising water levels in Fort Peck and Oahe. The Median, Upper Quartile, and Upper Decile simulations show that it is possible to provide steady-to-rising pool level in each of the three large upper reservoirs during the spring forage fish spawn period. Releases in the Lower Quartile and Lower Decile simulations are adjusted to maintain a steady-to-rising pool level at Garrison.

Two modified reservoir regulation plans shown in previous AOPs, the Fort Peck “mini-test” and unbalancing the upper three reservoirs, will not be implemented in 2009 due to low System storage. Both of these plans may be implemented when System storage recovers to more normal levels.

Actual System regulation from January 1 through July 31, 2008 and the regulating plans for each project through CY 2009 using the five runoff scenarios described on Page 4 are presented on *Plates 6 through 11*, inclusive. Big Bend regulation is omitted since storage at that project is relatively constant and average monthly releases are essentially the same as those at Oahe. These plates also show, on a condensed scale, actual regulation since 1953.

Plate 12 illustrates for Fort Peck, Garrison, Oahe, and Gavins Point the actual releases (Regulated Flow) as well as the Missouri River flows that would have resulted if the reservoirs were not in place (Unregulated Flow) during the period January 2007 through July 2008. *Plate 13* presents past and simulated gross average monthly power generation and gross peaking capability for the System.

C. Regulation Plan for the Balance of the 2008 Navigation Season and Fall of 2008. The regulation of the System for the period of August through November 2008 is presented in the following paragraphs.

Fort Peck Dam. Releases averaged 7,000 cfs during August and the first half of September. In mid-September they were gradually reduced to 4,000 cfs. The releases were held near that level until late November then raised to 6,000 cfs in December. The Fort Peck pool remained essentially steady through the period and ended November at 2210 ft msl. It will slowly decline through the winter as higher releases for hydropower are initiated. The record low pool elevation of 2196.2 feet msl was set in March 2007. The previous record low pool elevation was 2208.7 feet msl set in April 1991.

Garrison Dam. Releases averaged 13,900 cfs during August. They continued at 14,000 cfs until mid-September when irrigation ceased and were then reduced to 11,000 cfs. Releases were held at 10,500 to 11,000 cfs during October and November as a water conservation measure then raised to 14,000 cfs in December. The Garrison pool level slowly raised to 1826 feet msl by the end of November and will slowly decline through the winter as higher releases for hydropower are initiated. The record low pool elevation of 1805.8 feet msl was set in May 2005. The previous record low pool elevation was 1815.0 feet msl set in May 1991.

Oahe Dam. Releases averaged 18,500 cfs in August, and were reduced in early September to initiate an early fall drawdown of the Fort Randall pool, as the navigation season closed early in 2008. Low releases continued in September, October, and November to complete the annual fall draw of Fort Randall. Releases were increased in December for winter power production. The Oahe pool ended November at elevation 1593.5 feet msl. The record low Oahe pool elevation of 1570.2 feet msl was set in August 2006. The previous record low pool elevation was 1580.7 feet msl set in November 1989.

Big Bend Dam. Releases will parallel those from Oahe. Big Bend will generally fluctuate between 1420.0 feet msl and 1421.0 feet msl for weekly cycling during high power load periods.

Fort Randall Dam. Releases averaged 21,900 cfs in August and were scheduled in September to back up the releases from Gavins Point Dam. After the navigation season ended in late-October, releases were gradually reduced to as low as 7,000 cfs in November. The majority of the Fort Randall fall pool draw down occurred in September and October with the remaining drawdown accomplished in November.

Gavins Point Dam. Releases were scheduled to support downstream minimum service flows in reaches with commercial navigation throughout the 2008 navigation

season, which was shortened 30 days in accordance with the technical criteria for the July 1 System storage check presented in the Master Manual. The last day of flow support for the commercial navigation season will range from October 22 at Sioux City to October 31 at the mouth near St. Louis. Releases will be reduced by 3,000 cfs per day in mid-October until they reached 10,000 cfs. The 10,000 cfs release was maintained for a few days to allow sufficient travel time for the release changes to reach the critical downstream locations and then the releases were stepped down to the fall non-navigation season rate of 9,000 cfs. This 9,000 cfs minimum spring-fall release represents a reasonable long-term goal for water intake owners to strive for as they make improvements to their facilities. The Gavins Point pool level was raised 1.5 feet to elevation 1207.5 feet msl in September. The pool level will remain near that elevation during the fall and winter months.

D. Regulation Plan for Winter 2008-2009. The September 1 System storage check is used to determine the amount of the winter System release. A winter System release of 12,000 cfs is scheduled if System storage is less than 55 MAF on September 1; 17,000 cfs is scheduled when System storage is above 58 MAF; and the release is prorated for System storages between 55 and 58 MAF. During the winter of 2008-2009, we will strive to average a 12,000 cfs System release. If mild weather conditions prevail, System releases may be set lower than 12,000 cfs, but only if downstream water supply intakes can remain operable at those levels. Conversely, 12,000 cfs may be less than is required for downstream water supply intakes without sufficient incremental tributary flows below the System, and therefore, releases may need to be set at levels higher than 12,000 cfs at times to ensure downstream water supply intakes are operable. However, we believe that this minimum winter flow represents a reasonable long-term goal for water intake operability and for owners to strive for as they make improvements to their facilities. It may be necessary at times to increase Gavins Point releases to provide adequate downstream flows due to the forecast of excessive river ice formation or if ice jams or blockages form which temporarily restrict flows. Based on past experiences, these events are expected to occur infrequently and be of short duration. Given these infrequent temporary release increases above the 12,000 cfs level, the winter System release will likely average around 12,500 cfs. It is anticipated that this year's winter release will be adequate to serve all downstream water intakes except for very short periods during significant river ice formation or ice jamming.

Fort Peck Dam. Releases are expected to average 6,000 cfs to serve winter power loads and help balance System storage from December through February. Average winter release rates are about 11,000 cfs. The Basic simulation shows that the Fort Peck pool level will rise slightly to near 2211.4 feet msl during the winter period, ending February about 22.6 feet below the base of the annual flood control storage zone. Carryover multiple purpose storage in the three large upper reservoirs will slightly out of balance on March 1, 2009 due to minimum release requirements below the dam throughout the year. Fort Peck will end February 2009 about 3.6 feet low, Garrison

about 1.8 feet high, and Oahe about 0.6 feet high. The pool level is expected to rise during March to near elevation 2213 feet msl.

Garrison Dam. Releases will be scheduled at a very low rate, 15,000 cfs, this winter to help balance System storage. This low release rate is normally sufficient to prevent ice induced flooding at the time of freeze-in, but temporary reductions in the releases may be scheduled to prevent exceedence of a 13-foot stage at the Bismarck gage. Flood stage is 16 feet. Average winter release rates for Garrison are 20,400 cfs in December, 23,000 cfs in January and 24,200 cfs in February. The Garrison pool level is expected to decline about two feet from near elevation 1825.8 feet msl to near elevation 1823.7 feet msl by March 1, 13.8 feet below the base of the annual flood control storage zone. The Median simulation indicates the pool level will rise to elevation 1825.6 feet msl by March 31.

Oahe Dam. Releases for the winter season will provide backup for the Fort Randall and Gavins Point releases plus fill the recapture space available in the Fort Randall reservoir consistent with anticipated winter power loads. Monthly average releases may vary substantially with fluctuations in power loads occasioned by weather conditions but, in general, are expected to average 15,000 cfs. Daily releases will vary widely to best meet power loads. Peak hourly releases, as well as daily energy generation, will be constrained to prevent urban flooding in the Pierre and Fort Pierre areas if severe ice problems develop downstream of Oahe Dam. This potential reduction has been coordinated with the Western Area Power Administration. The Oahe pool level is expected to decline about one-half foot from elevation 1592.5 feet msl at the end of November to elevation 1592.0 feet msl by the beginning of March, 15.5 feet below the base of the annual flood control storage zone. The pool is expected to rise to elevation 1593 feet msl by the end of March.

Big Bend Dam. The Big Bend pool level will be maintained in the normal 1420.0 to 1421.0 feet msl range during the winter.

Fort Randall Dam. Releases will average near 10,500 cfs during the winter season. The Fort Randall pool level is expected to rise from its fall drawdown elevation of 1337.5 feet msl to near elevation 1350.0 feet msl, the seasonal base of flood control, by March 1. However, if the plains snowpack flood potential downstream of Oahe Dam remains quite low, the Fort Randall pool level will be raised to near 1353.0 feet msl by March 1. It is likely that a pool level as high as 1355.2 feet msl could be reached by the end of the winter period on March 31 if runoff conditions permit. The Fort Randall pool level above the White River delta near Chamberlain, South Dakota will likely remain at a higher elevation than the pool level below the delta from early October through December, due to the damming effect of this delta area.

Gavins Point Dam. Gavins Point winter releases are discussed in the first paragraph of this section. The Gavins Point pool level will be near elevation 1207.5 feet msl until late February when it will be lowered to elevation 1206.0 feet msl to create additional capacity to store spring runoff.

System storage for all runoff conditions will be substantially below the base of the annual flood control zone by March 1, 2009, the beginning of next year's runoff season.

E. Regulation During the 2009 Navigation Season. The Upper Decile, Upper Quartile, Median, Lower Quartile, and Lower Decile runoff scenarios modeled for this year's AOP follow the technical criteria presented in the current Master Manual for downstream flow support. All five runoff scenarios studied for this year's AOP provide gradually increasing Gavins Point releases to provide Missouri River navigation season flow support at the mouth of the Missouri near St. Louis by April 1, 2009, the normal navigation season opening date. The corresponding dates at upstream locations are Sioux City, March 23; Omaha, March 25; Nebraska City, March 26; and Kansas City, March 28. However, if during the 2009 navigation season there is no commercial navigation scheduled to use the upper reaches of the navigation channel, we will consider eliminating navigation flow support for targets in those reaches to conserve water in the System, as has been done since 2003.

Navigation flow support for the 2009 season will be determined by actual System storage on March 15 and July 1. All runoff scenarios modeled indicate minimum service flow support at the start of the 2009 navigation season, but following the July 1 System storage check a higher service level is provided for the Median runoff scenario and above. If the July 1 System storage check indicates an increase in service level, any increase may be delayed until the end of the T&E bird species' nesting season, depending on the potential for 'take' of those species. The normal 8-month navigation season is shortened as a water conservation measure for all but the Upper Quartile and Upper Decile runoff scenarios as shown in *Table II*.

TABLE II
NAVIGATION SERVICE SUPPORT
FOR THE 2009 SEASON

	<u>Runoff Scenario (MAF)</u>	<u>System Storage</u>		<u>Flow Level Above or Below Full Service (cfs)</u>		<u>Season Shortening (Days)</u>
		<u>March 15 (MAF)</u>	<u>July 1 (MAF)</u>	<u>Spring</u>	<u>Summer/Fall</u>	
U.D.*	34.3	47.5	57.2	-6,000	0	0
U.Q.*	30.3	47.4	55.2	-6,000	-1,700	0
Med *	24.4	45.5	50.7	-6,000	-5,800	5
L.Q.*	19.3	43.6	45.7	-6,000	-6,000	30
L.D.*	16.2	43.5	44.5	-6,000	-6,000	30

*Includes both March and May Spring Pulses

As previously stated, the planned regulation for the 2009 nesting season will be SR-FTT. The initial steady release, which is estimated to be 25,000 to 28,000 cfs, will be based on hydrologic conditions and the availability of habitat at that time. Model runs included in this AOP have a Gavins Point release peaking cycle of 2 days down and 1 day up following the May pulse to keep birds from nesting at low elevations. Gavins Point releases will be adjusted to meet downstream targets as tributary flows recede, but ideally the initial steady release will be sufficient to meet downstream targets until the majority of the birds have nested. The purpose of this regulation is to continue to meet the project purposes while minimizing the loss of nesting T&E species and conserving water in the upper three reservoirs. Releases from Garrison and Fort Randall will follow repetitive daily patterns from early May, at the beginning of the T&E species' nesting season, to the end of the nesting in late August. In addition to the intra-day pattern, Fort Randall releases may also be cycled with 2 days of low releases and 1 day of higher releases during the early part of the nesting season to maintain release flexibility in that reach while minimizing the potential for take.

As discussed previously, System storage will be above the storage precludes for both spring pulses under all runoff scenarios modeled. Both spring pulses may be reduced or eliminated due to the downstream flow limits. It also possible that the spring pulses could be reduced or eliminated as they travel downstream if there are significant releases being made from downstream Corps tributary reservoir projects. If the releases at these downstream Corps tributary reservoirs can be reduced without undue increased risk to other areas, it will be possible to reduce or eliminate the increase in flows on the Missouri River due to the spring pulses. However, it should be noted that the conditions that would allow for such a regulation are experienced very infrequently, because significant releases from the tributary reservoirs are fairly rare

during the spring of the year. This is especially true for the May pulse, which would require more of an adjustment because of the higher magnitude of that pulse.

Gavins Point releases may be quite variable during the 2009 navigation season but are expected to range from 18,000 to 35,000 cfs. Release reductions necessary to minimize downstream flooding are not reflected in the monthly averages shown in the simulations but will be implemented as conditions warrant. Reductions in System releases to integrate the use of downstream Missouri River flow support from the Kansas Reservoir System have not been included since they are based on downstream hydrologic conditions but this storage will be utilized to the extent possible to provide basin water conservation. Simulated storages and releases for the System and individual reservoirs within the System are shown on *Plates 6 through 11*. Ample storage space exists in the System to control flood inflows under all scenarios simulated for this AOP.

F. Regulation Activities for T&E Species and Fish Propagation Enhancement.

The ability to provide steady to rising pool levels in the upper three reservoirs in low runoff years is very dependent on the volume, timing, and distribution of runoff. The reservoir regulation simulations presented in this AOP for the Upper Decile, Upper Quartile, and Median runoff scenarios show that steady to rising pool levels would occur during the spring fish spawn period for the upper three System reservoirs. The studies show that inflows are sufficient to maintain steady to rising pools at Fort Peck and Garrison from April through June for Lower Quartile and Lower Decile runoff scenarios, however, the Oahe pool level may fall during this period. As part of the overall plan to rotate emphasis among the upper three reservoirs during low runoff years, Fort Peck and Oahe were scheduled to be favored during the 2009 forage fish spawn, however, in response to a request from MoRAST, emphasis will be given to Garrison from April 20 to May 20, 2009. This will be accomplished by setting releases at Fort Peck and Garrison at a level that would maintain a rising Garrison pool, but no less than the minimum required to supply downstream irrigation. These adjustments may be restricted when the terns and plovers begin nesting in May. If the drought continues, emphasis during the fish spawn will be rotated among the upper three reservoirs and may also be adjusted to be opportunistic in regard to runoff potential. The upper three reservoirs will be managed to benefit forage fish to the extent reasonably possible, while continuing to serve the other Congressionally authorized project purposes.

As discussed in the previous section, the 2008-2009 AOP does not include provisions for unbalancing the Fort Peck, Garrison, and Oahe reservoirs for the benefit of the endangered species and reservoir fishery on March 1, 2009 for any of the runoff scenarios. The criteria for unbalancing are based on recommendations provided by the MRNRC and the USFWS. Under all simulations, System storage will be below the

minimum levels under which unbalancing is recommended by either the MRNRC or the USFWS.

Fort Peck Dam. The repetitive daily pattern of releases from Fort Peck Dam has not been implemented since the 2004 tern and plover nesting season. This adaptive management decision was made based on data collected during previous nesting seasons. In recent years, birds in this reach have nested on available high habitat, and thus were not expected to be impacted by the potential range of releases from Fort Peck during the summer. Releases during the 2009 nesting season will not be restricted by the repetitive daily pattern unless habitat conditions or nesting patterns change. This regulation should result in habitat conditions for nesting terns and plovers that are similar to those that were available in 2008.

If flood flows enter the Missouri River below the project during the nesting season, hourly releases will generally be lowered to no less than 3,000 cfs in order to keep traditional riverine fish rearing areas continuously inundated, while helping to lower river stages at downstream nesting sites. In rare instances releases below 3,000 cfs may be scheduled for flood damage reduction. April releases should be adequate for trout spawning below the project. Maintaining a rising Fort Peck pool level will be dependent upon the daily inflow pattern to the reservoir, but appears possible under all the runoff scenarios. The Fort Peck “mini-test” would not be run under any runoff scenario. The Fort Peck pool level must be at elevation 2229 feet msl to allow releases required for the “mini-test” via the spillway.

Garrison Dam. Daily average releases from Garrison will be much less than full powerplant capacity during the tern and plover nesting season under all runoff scenarios. Hourly peaking will be restricted during the nesting season to limit peak stages below the project for nesting birds.

Although the Garrison pool level during the summer of 2009 will be considerably higher than in the past several years, steps will again be taken to conserve the volume of cold-water habitat. In 2005 plywood was attached to the lower 50 feet of the trash racks on two of the penstocks to allow water to be drawn from a higher, and therefore warmer, region of the reservoir. In 2007 plywood was installed on one additional trash rack. During 2009, releases from Garrison during the summer months will be made through the three hydropower units with modified intakes, to the extent reasonably possible. In addition, the manner in which the other hydropower units are operated will be adjusted to run them at or near full capacity when in use, which also has the effect of drawing water off the upper, warmer, portion of the reservoir. In combination, these two efforts are expected to save several hundred thousand acre-feet of coldwater habitat for the benefit of the coldwater fishery.

If runoff is not sufficient to keep all the pool levels rising during the fish spawn in 2000, the Corps will, to the extent reasonably possible while serving other Congressionally authorized project purposes, set releases to result in a steady to rising pool at Garrison from April 20 to May 20. Adjustments to Garrison's releases, however, may be restricted when the terns and plovers begin nesting in May. A rising pool at Garrison during the fish spawn in April and May will be dependent upon the daily inflow pattern to the reservoir but appears possible with all runoff simulations.

Oahe Dam. Releases in the spring and summer will back up those from Gavins Point Dam. The pool level should be steady to rising in the spring during the fish spawn under median and above runoff scenarios, but it will be dependent on the timing and distribution of runoff as well as the need to adjust releases from Garrison to prevent that reservoir from declining.

Fort Randall Dam. Primary consideration will be being given to staging or storing extra water in Fort Randall reservoir for the May spring pulse from Gavins Point. This will reduce the risk of impacts at the upper three reservoirs including those associated with water quality due to lower reservoir levels, water intake access problems and historic and cultural site exposure.

To the extent reasonably possible, Fort Randall will be regulated to provide for a pool elevation near 1355 feet msl during the fish spawn period, provided water can be supplied from other reservoirs for downstream uses. The pool will not be drawn down below elevation 1337.5 feet msl in the fall to ensure adequate supply for water intakes. As a measure to minimize take while maintaining the flexibility to increase releases during the nesting season, hourly releases from Fort Randall during the 2009 nesting season will be restricted to limit peak stages below the project for nesting birds. Daily average flows may be increased every third day to preserve the capability of increasing releases later in the summer with little or no incidental take if drier downstream conditions occur.

Gavins Point Dam. March and May spring pulses from Gavins Point Dam for the benefit of the endangered pallid sturgeon would be implemented under all runoff scenarios in 2009. Details related to the spring pulses, including the specific technical criteria for the 2009 pulses, are presented in Plate 3. Details of the spring pulses included in the AOP simulations are provided in Chapter V, Section B, entitled "2008-2009 AOP Simulations".

Based on 2003 through 2007 nesting season results with the SR-FTT regulation and planned habitat development activities, it is anticipated that sufficient habitat will be available above the planned release rates to provide for successful nesting. All reasonable measures to minimize the loss of nesting T&E bird species will be used. These measures include, but are not limited to, such things as a relatively high initial SR

during the peak of nest initiation, the use of the Kansas River basin reservoirs, moving nests to higher ground when possible, and monitoring nest fledge dates to determine if delaying an increase a few days might allow threatened chicks to fledge. The location of navigation tows and river conditions at intakes would also be monitored to determine if an increase could be temporarily delayed without impact. Cycling releases every third day may be used to conserve water early in the nesting season if extremely dry conditions develop. In addition, cycling may be used during downstream flood control regulation.

The Gavins Point pool will be regulated near 1206.0 feet msl in the spring and early summer, with minor day-to-day variations due to inflows resulting from rainfall runoff. Several factors can limit the ability to protect nests from inundation in the upper end of the Gavins Point pool. First, because there are greater numbers of T&E bird species nesting below the Gavins Point project, regulation to minimize 'take' usually involves restricting Gavins Point releases, which means that the Gavins Point pool can fluctuate significantly due to increased runoff from rainfall events. Second, rainfall runoff between Fort Randall Dam and Gavins Point Dam can result in relatively rapid pool rises because the Gavins Point project has a smaller storage capacity than the other System reservoirs. And third, the regulation of Gavins Point for downstream flood control may necessitate immediate release reductions to reduce downstream damage. When combined, all these factors make it difficult and sometimes impossible to prevent inundation of nests in the upper end of the Gavins Point reservoir. Planned habitat creation projects in Lewis and Clark Lake will reduce the inundation risk to T&E bird species by providing higher habitat for nesting. The pool will be increased to elevation 1207.5 feet msl when it is determined that there are no terns or plovers nesting along the reservoir.

G. Regulation Activities for Historic and Cultural Properties. As acknowledged in the 2004 Programmatic Agreement for the Operation and Management of the Missouri River Main Stem System (PA), wave action and fluctuation in the level of the System reservoir pools results in erosion along the banks of the reservoirs. With the recent drought conditions additional sites have become exposed as the pool levels have declined. The Corps will work with the Tribes utilizing 36 CFR Part 800 and the PA to address the exposure of these sites. The objective of a programmatic agreement is to deal "...with the potential adverse effects of complex projects or multiple undertakings..." The PA objective was to collaboratively develop a preservation program that would avoid, minimize and/or mitigate adverse effects along the System reservoirs. All tribes, whether signatory to the PA or not, may request government-to-government consultation on the regulation of the System and the resulting effect on historic and cultural properties and other resources. Pool levels at the upper three reservoirs improved significantly in 2008 and are currently 9 to 12 feet higher than one year ago, but will remain below normal in 2009 continuing to expose cultural sites along the shorelines. Actions to avoid, minimize or mitigate adverse

impacts and expected results of the actions are covered under Chapter VI of this AOP. *Plate 14* shows the locations of the Tribal Reservations.

Fort Peck Dam. Depending on runoff in the Missouri River basin, System regulation during 2009 could result in a Fort Peck pool elevation variation from a high of 2233 feet msl to a low of 2206 feet msl. This is based on the Upper and Lower Decile runoff scenarios (see *Plate 8* and the studies included at the end of this report). Based on a review of existing information, approximately 10 to 25 known sites could be affected during this period.

Garrison Dam. Based on the Upper and Lower Decile runoff scenarios (see *Plate 9* and the studies included at the end of this report), Garrison pool elevations could range between 1842 and 1814 feet msl during 2009. Based on a review of existing information, approximately 25 to 50 known sites could be affected during this period.

Oahe Dam. At the Oahe reservoir, the System regulation under the Upper and Lower Decile runoff scenarios could result in pool elevations between 1608 and 1580 feet msl (see *Plate 10* and the studies included at the end of this report). Based on a review of existing information, approximately 125 to 175 known sites could be affected during this period.

Big Bend Dam. System regulation will be adjusted to maintain the Big Bend pool level in the normal 1420 to 1421 feet msl range during 2009. Short-term increases above 1421 due to local rainfall may also occur. Based on a review of existing information, approximately 50 to 75 known sites could be affected during this period.

Fort Randall Dam. As part of the normal System regulation, the Fort Randall pool elevations will vary between 1350 and 1355 feet msl during the spring and summer of 2009. Short-term increases above 1355 feet msl due to local rainfall may occur. The annual fall drawdown of the reservoir to elevation 1337.5 feet msl will begin prior to the close of the navigation season and will be accomplished by early December. The reservoir will then refill during the winter to elevation 1350 feet msl. Based on a review of existing information, approximately 25 to 50 known sites could be affected during this period.

Gavins Point Dam. System regulation will be adjusted to maintain the Gavins Point pool level in the normal 1206 to 1207.5 feet msl range during 2009. Short-term increases above 1207.5 feet msl may occur due to local rainfall. Based on a review of existing information, approximately 10 to 25 known sites could be affected during this period.

VI. SUMMARY OF RESULTS EXPECTED IN 2009

With regulation of the System in accordance with the 2008-2009 AOP outlined in the preceding pages, the following results can be expected. Table III summarizes the critical decision points throughout the year for all runoff conditions.

Table III
Summary of 2008 -2009 AOP Studies

Decision Points	2009-2010 Runoff Condition				
	Upper Decile	Upper Quartile	Median	Lower Quartile	Lower Decile
March 1 System Storage March Spring Pulse? Pulse Magnitude March 23-31 GP Release	46.4 MAF Yes 5 kcfs 22.9 kcfs	46.4 MAF Yes 5 kcfs 22.9 kcfs	44.6 MAF Yes 5 kcfs 22.9 kcfs	42.9 MAF Yes 5 kcfs 26.0 kcfs	42.9 MAF Yes 5 kcfs 26.0 kcfs
March 15 System Storage Spring Service Level	47.5 MAF Minimum	47.4 MAF Minimum	45.5 MAF Minimum	43.6 MAF Minimum	43.5 MAF Minimum
May 1 System Storage May Spring Pulse? Pulse Magnitude May Cycling May GP Release	50.6 MAF Yes 16.0 kcfs 22.0/25.0 kcfs 26.0 kcfs	49.9 MAF Yes 16.0 kcfs 22.0/25.0 kcfs 26.0 kcfs	46.9 MAF Yes 13.9 kcfs 22.0/25.0 kcfs 25.7 kcfs	43.8 MAF Yes 9.8 kcfs 25.3/28.3 kcfs 27.9 kcfs	43.5 MAF Yes 9.7 kcfs 25.3/28.3 kcfs 27.9 kcfs
Fish Spawn Rise (Apr-Jun) FTPK Pool Elev Change GARR Pool Elev Change OAHE Pool Elev Change	+13.4 feet +10.5 feet +11.0 feet	+11.4 feet +8.1 feet +8.9 feet	+8.8 feet +7.2 feet +4.2 feet	+5.2 feet +4.9 feet -1.5 feet	+2.8 feet +3.5 feet -2.4 feet
July 1 System Storage Sum-Fall Service Level (kcfs) Nav Season Shortening	57.2 MAF Full Serv 0 Days	55.2 MAF Full Serv – 1.7 0 Days	50.7 MAF Full Serv – 5.8 5 Days	45.7 MAF Min Service 30 Days	44.5 MAF Min Service 30 Days
September 1 System Storage Winter GP Release	57.9 MAF 16.8 kcfs	55.4 MAF 12.5 kcfs	50.0 MAF 12.5 kcfs	44.1 MAF 12.5 kcfs	42.2 MAF 12.5 kcfs
February 28 System Storage End-Year Pool Balance Percent Pool	56.2 MAF Balanced 99%	54.0 MAF Balanced 95%	48.3 MAF Balanced 85%	41.9 MAF Balanced 74%	39.2 MAF Balanced 69%

A. Flood Control. All runoff scenarios studied will begin the March 1, 2009 runoff season substantially below the desired 57.0 MAF base of the annual flood control

and multiple use zone. Therefore, the entire System flood control zone, plus an additional 10.6 to 14.1 MAF of the carryover multiple use zone, will be available to store runoff. The System will be available to significantly reduce peak discharges and store a significant volume of water for all floods that may originate above the System.

Remaining storage in the carryover multiple use zone will be adequate to provide support for all of the other multiple purposes of the System, though at reduced levels.

B. Water Supply and Water Quality Control. Problems at intakes located in the river reaches and Mainstem reservoirs are related primarily to intake elevations or river access rather than inadequate water supply. In emergency situations, short-term adjustments to protect human health and safety would be considered to keep intakes operational.

Low reservoir levels during the current drought have contributed to both intake access and water quality problems for intakes on Garrison and Oahe reservoirs, including several Tribal intakes; however better runoff in 2008 eliminated concern over many of these intakes. Gains in the Oahe pool level required modification of the Standing Rock Sioux Tribe's temporary intake at Fort Yates to protect it from the rising water levels. The Bureau of Reclamation (BOR) installed the temporary intake after the primary intake failed in November 2003 leaving the community without water for several days. If the drought continues reservoir pool levels and releases may decline renewing the potential for intake access and water quality problems at both river and reservoir intakes. Under the Lower Decile runoff scenario, minimum reservoir levels in 2009 would be approximately 10 feet higher than the record lows set in the current drought. Although not below the critical shut-down elevations for any intake, return to lower levels would require extra monitoring to ensure the continued operation of the intakes.

Although below normal winter releases are being provided in the winter of 2008-2009 and in the winter of 2009-2010 for all but the Upper Decile runoff scenario, all water supply and water quality requirements on the Missouri River both below Gavins Point Dam and between System reservoirs should be met for all flow conditions studied. Due to the low reservoir levels and releases many intake operators have experienced, and will continue to experience, additional water treatment costs. It is possible with the low winter releases that ice formation or ice jams may temporarily reduce river stages to levels below which some intakes can draw water. Therefore, during severe cold spells, experience has shown that for brief periods it may be necessary to increase Gavins Point releases to help alleviate downstream water supply problems.

During the non-navigation periods in the spring and fall, System releases as low as 9,000 cfs are likely if enough downstream tributary flow exists to allow for continued

operation of downstream water intakes. It has been possible to reduce System releases to 9,000 cfs in the spring and fall of each season since the fall of 2004. If a non-navigation year would occur in the future, summer releases (May thru August) could average around 18,000 cfs from the System. However, it should be noted that System releases will be set at levels that meet the operational requirements of all water intakes to the extent reasonably possible. Problems have occurred at several downstream intakes in the past; however, in all cases the problems have been associated with access to the river or reservoir rather than insufficient water supply. In addition, the low summer release rate would likely result in higher water temperatures in the river, which could impact a power plant's ability to meet their thermal discharge permits. Again, it should be noted that System releases will be set at levels that allow the downstream power plant to meet their thermal discharge permit requirements to the extent reasonably possible. This may mean that actual System releases in the hottest part of the summer period may be set well above the 18,000 cfs level. The Corps continues to encourage intake operators throughout the System and along the lower river reach to make necessary modifications to their intakes to allow efficient operation over the widest possible range of hydrologic conditions.

C. Irrigation. Scheduled releases from the System reservoirs will be sufficient to meet the volumes of flow required for irrigation diversions from the Missouri River. Some access problems may be experienced, however, if drought conditions persist. Below Fort Peck, localized dredging may once again be required in the vicinity of irrigation intakes in order to maintain access the water if releases are low next summer. Tributary irrigation water usage is fully accounted for in the estimates of water supply.

D. Navigation. Service to navigation in 2009 for all runoff scenarios will be at minimum service flow support from the beginning of the navigation season through the July 1 storage check. Minimum service flow support will continue throughout the entire navigation season for Lower Quartile and Lower Decile runoff scenarios. Simulation of Median runoff resulted in only a slightly higher service level, 200 cfs above minimum service, for the second half of the 2009 navigation season. The service level would rise to 1,700 cfs below full service following the July 1 System storage check for Upper Quartile runoff, and to full service for Upper Decile runoff. Although the AOP simulations provide a comparison of typical flow support under varying runoff conditions, the actual rate of flow support for the 2009 navigation season will be based on actual System storage on March 15 and July 1, 2009.

While the Upper Decile and Upper Quartile simulations show no reduction in the normal 8-month navigation season length, the Median runoff simulation shows a 5- day shortening of the navigation season, and the Lower Quartile and Lower Decile simulations show 30 days of shortening. The anticipated service level and season length for all runoff conditions simulated are shown in *Table II*.

E. **Power.** *Tables IV and V* give the estimated monthly System load requirements and hydropower supply of the Eastern Division, Pick-Sloan Missouri Basin Program (P-S MBP), from August 2008 through December 2009. Estimates of monthly peak demands and energy include customer requirements for firm, short-term firm, summer firm, peaking, and various other types of power sales, System losses, and the effects of diversity. Also included in the estimated requirements are deliveries of power to the Western Division, P-S MBP, to help meet its firm power commitments.

F. **Recreation, Fish and Wildlife.** The regulation of the System will continue to provide recreation and fish and wildlife opportunities in the project areas and along the Missouri River as well as other benefits of a managed system. Improved runoff resulted in higher pool levels and better recreation access at the upper three reservoirs during 2008, however access in 2009 may remain limited at several locations. Special regulation adjustments incorporating specific objectives for these purposes will be made to the extent reasonably possible. Conditions in the lower three reservoirs should be favorable for the many visitors who enjoy the camping, boating, fishing, hunting, swimming, picnicking, and other recreational activities associated with the System reservoirs.

Boat ramps that were lowered and low water ramps that were constructed during the drought of the late 1980's to early 1990's and the further improvements made in 2003 through 2008 should provide adequate reservoir access in 2009 for all runoff conditions.

The effects of the simulated System regulation during 2009 on fish and wildlife are included in Chapter V, Section F, entitled, "Regulation Activities for T&E Species and Fish Propagation Enhancement."

G. **Historic and Cultural Properties.** As mentioned in Chapter V of this AOP, the regulation of the System during 2008 and 2009 will expose cultural sites due to erosion from the normal fluctuation of pool elevations. With the recent drought conditions additional sites have become exposed as the pool levels have declined. The Corps will work with the Tribes utilizing 36 CFR Part 800 and the PA to address the exposure of these sites. The objective of a PA is to deal "...with the potential adverse effects of complex projects or multiple undertakings..." The PA objective was to collaboratively develop a preservation program that would avoid, minimize and/or mitigate the adverse affects of the System operation. All tribes, whether signatory to the PA or not, may request government-to-government consultation on the regulation of the System and the resulting effect on historic and cultural properties and other resources.

TABLE IV
PEAKING CAPABILITY AND SALES
(1,000 kW at plant)

2008	Estimated Committee Sales*	Expected C of E Capability					Expected Bureau Capability*					Expected Total System Capability				
		120%	Basic	80%			120%	Basic	80%			120%	Basic	80%		
Aug	2115	2185	2181	2177			211	211	210			2396	2392	2387		
Sep	1686	2176	2165	2156			211	212	210			2387	2377	2366		
Oct	1649	2141	2130	2118			211	211	210			2352	2341	2328		
Nov	1766	2151	2135	2120			209	209	208			2360	2344	2328		
Dec	1958	2172	2145	2124			205	205	205			2377	2350	2329		
2009																
Jan	2112	2188	2160	2139			200	201	202			2388	2361	2341		
Feb	1867	2192	2169	2144			196	198	199			2388	2367	2343		
		<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>	<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>	<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>
Mar	1774	2214	2210	2180	2148	2146	194	194	195	194	196	2408	2404	2375	2342	2342
Apr	1664	2244	2235	2190	2146	2140	194	190	194	190	198	2438	2425	2384	2336	2338
May	2416	2270	2254	2199	2145	2137	200	197	202	197	203	2470	2451	2401	2342	2340
Jun	2417	2322	2297	2237	2164	2149	213	213	213	213	211	2535	2510	2450	2377	2360
Jul	2444	2334	2305	2240	2158	2135	213	213	213	213	211	2547	2518	2453	2371	2346
Aug	4653	2324	2295	2227	2144	2118	209	210	210	210	208	2533	2505	2437	2354	2326
Sep	2444	2319	2289	2222	2127	2094	209	209	209	209	208	2528	2498	2431	2336	2302
Oct	2443	2305	2274	2201	2087	2052	208	208	210	208	209	2513	2482	2411	2295	2261
Nov	2376	2272	2239	2175	2091	2055	206	206	207	206	207	2478	2445	2382	2297	2262
Dec	2377	2238	2214	2147	2056	2019	202	202	203	202	205	2440	2416	2350	2258	2224

* Estimated sales, including system reserves. Power in addition to hydro production needed for these load requirements will be obtained from other power systems by interchange or purchase.

** Total output of Canyon Ferry and 1/2 of the output of Yellowtail powerplants

TABLE V
ENERGY GENERATION AND SALES
(Million kWh at plant)

2008	Estimated Committee Sales*	Expected C of E Generation					Expected Bureau Generation *					Expected Total System Generation				
		120%	Basic	80%			120%	Basic	80%			120%	Basic	80%		
Aug	846	529	540	551			99	78	72			628	618	623		
Sep	725	540	538	567			87	68	62			627	606	629		
Oct	723	477	497	504			85	74	61			562	571	565		
Nov	791	263	273	281			87	78	60			350	351	341		
Dec	897	476	446	433			89	79	62			565	525	495		
2009																
Jan	913	462	462	457			87	78	61			549	540	518		
Feb	886	378	418	409			76	69	54			454	487	463		
		<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>	<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>	<u>U.D.</u>	<u>U.Q.</u>	<u>Med</u>	<u>L.Q.</u>	<u>L.D.</u>
Mar	814	469	483	442	491	506	83	83	75	59	59	552	566	517	550	565
Apr	752	492	532	492	630	596	103	93	73	44	44	595	625	565	674	640
May	696	707	721	745	777	800	132	125	92	48	48	839	846	837	825	848
Jun	754	727	717	715	771	769	149	147	105	50	50	876	864	820	821	819
Jul	841	956	901	811	848	841	155	140	85	63	52	1111	1041	896	911	893
Aug	820	996	936	849	808	802	104	97	77	63	51	1100	1033	926	871	853
Sep	725	865	800	666	620	583	90	87	74	60	49	955	887	740	680	632
Oct	723	700	658	558	531	530	90	87	73	60	52	790	745	631	591	582
Nov	791	646	614	503	295	295	86	83	82	61	57	732	697	585	356	352
Dec	897	627	548	524	511	511	88	84	84	68	53	715	632	608	579	564
CY TOT		8025	7750	7185	7148	7099	1243	1189	966	690	631	9268	8939	8151	7838	7730

* Estimated sales including system reserves and losses. Power in addition to hydro production needed for these load requirements will be obtained from other systems by interchange or purchase.

** Total output Canyon Ferry and 1/2 output of Yellowtail powerplants

The planned preservation program for this AOP is outlined by multiple stipulations in the PA. One of the stipulations, or program components, is the Five-Year Plan. This plan outlines how the Corps will accomplish its responsibilities under the PA and the National Historic Preservation Act. The "Draft Five Year Plan, dated February 2005" (see <https://www.nwo.usace.army.mil/CR/>) is currently being implemented. The plan includes inventory, testing and evaluation, mitigation and other specific activities that will allow the Corps to avoid, minimize and/or mitigate the adverse effects to cultural sites on Corps lands within the System. Many of the actions listed in the plan are within the elevation ranges that will occur with the implementation of the Master Manual criteria in 2008 and 2009. Two critical components of the Five-Year plan that are applicable to this AOP are monitoring and mitigation, which will be briefly discussed in the following paragraphs.

First, a collaboratively developed plan, entitled "Draft Monitoring and Enforcement Plan, dated April 2005" (see <https://www.nwo.usace.army.mil/CR/>) is in place. This monitoring plan outlines the sites that require monitoring and specifies a frequency for monitoring. The Corps is strategically monitoring sites, including those sites within the potential operating pool elevations, to document the effects of the implementation of the 2008-2009 AOP. Specific sites are identified in the draft Monitoring and Enforcement Plan for the monitoring team, comprised of Corps rangers and tribal monitors, to visit and document impacts. This focused monitoring is resulting in more accurate data on the current impacts to sites along the river plus it is assisting with the identification of sites for mitigation. Training for the monitoring teams was held in June 2006, July 2007, March 2008, April 2008 and again in July 2008.

Secondly, mitigation or protection of sites that are being adversely impacted continues. During the reporting period for the 2007 Annual Report by the Corps on the implementation of the Programmatic Agreement twelve sites were either completed, started, or in the design phase. The annual report is available at <https://www.nwo.usace.army.mil/CR/>. In addition the Corps has awarded a contract to develop an erosion model that will compare modeling data against actual erosion data, collected by the monitoring team, to assist in the prioritization of sites for protection. The model is expected to be complete by December 2008.

Results expected from the proposed monitoring and mitigation actions include more accurate horizontal and vertical data on existing cultural sites, detailed impact data, proactive protection and preservation of sites. The effects of the simulated System regulation during 2008-2009 on cultural sites are included in the Chapter V, section G., entitled, "Regulation Activities for Historic and Cultural Properties."

H. System Storage. If August 1, 2008 Basic runoff forecast verifies, System storage will decline to 44.1 MAF by the close of CY 2008. This would be 10.2 MAF

higher than the all-time record low storage of 33.9 MAF set on February 9, 2007 and nearly 7.3 MAF higher than last year's storage of 36.8 MAF. This end-of-year storage is 8.6 MAF less than the 1967 to 2007 average. The record low storage during the 1988-1992 drought was 40.8 MAF in January 1991. The end-of-year System storages have ranged from a maximum of 60.9 MAF, in 1975, to the 2006 minimum of 34.4 MAF. Forecasted System storage on December 31, 2009 is presented in *Table VI* for the runoff scenarios simulated.

I. **Summary of Water Use by Functions.** Anticipated water use in CY 2008, under the regulation plan with the Basic forecast of water supply is shown in *Table VII*. Actual water use data for CY 2007 are included for information and comparison. Under the reservoir regulation simulations in this AOP, estimated water use in CY 2009 also is shown in *Table VII*.

TABLE VI
ANTICIPATED DECEMBER 31, 2009 SYSTEM STORAGE

Water Supply Condition	Total (12/31/09)	Carryover Storage Remaining 1/	Unfilled Carryover Storage 2/	Total Change CY 2009
(Volumes in 1,000 Acre-Feet)				
Upper Decile	55,900	37,900	1,100	10,400
Upper Quartile	53,400	35,400	3,600	7,900
Median	47,900	29,900	9,100	3,800
Lower Quartile	41,900	23,900	15,100	-900
Lower Decile	39,400	21,400	17,600	-3,400

1/ Net usable storage above 18.0 MAF System minimum pool level established for power, recreation, irrigation diversions, and other purposes.

2/ System base of annual flood control zone containing 57.0 MAF.

TABLE VII
MISSOURI RIVER MAINSTEM SYSTEM
WATER USE FOR CALENDAR YEARS 2007, 2008, AND 2009 ABOVE SIOUX CITY, IOWA
in Million Acre-Feet (MAF)

	CY 2007 Actual	CY 2008 Basic Simulation	Simulations for Calendar Year 2009				
			Upper Decile	Upper Quartile	Median	Lower Quartile	Lower Decile
Upstream Depletions (1)							
Irrigation, Tributary Reservoir Evaporation & Other Uses	2.3	1.7					
Tributary Reservoir Storage Change	-0.1	0.6					
Total Upstream Depletions	2.2	2.3	2.5	2.5	2.5	2.5	2.4
System Reservoir Evaporation (2)	2.5	2.1	1.2	1.1	1.6	1.8	1.7
Sioux City Flows							
Navigation Season							
Unregulated Flood Inflows Between Gavins Point & Sioux City (3)	0.0	0.0					
Navigation Service Requirement (4)	9.8	10.7	16.2	15.0	12.8	11.9	11.5
Supplementary Releases							
T&E Species (5)	0.3	0.3	0.5	0.4	0.4	0.4	0.4
Flood Evacuation (6)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Non-navigation Season							
Flows	3.8	3.4	3.5	3.2	3.2	3.6	3.6
Flood Evacuation Releases (7)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
System Storage Change	2.5	7.3	10.4	8.1	3.9	-0.9	-3.4
Total	21.1	26.1	34.3	30.3	24.4	19.3	16.2
Project Releases							
Fort Peck	4.6	4.2	5.2	4.9	4.5	4.6	4.7
Garrison	10.2	9.5	14.0	13.5	12.5	12.3	11.8
Oahe	8.7	8.8	13.7	13.6	13.2	13.9	14.1
Big Bend	7.9	8.4	13.6	13.5	13.1	13.8	13.9
Fort Randall	8.9	9.4	15.2	14.7	13.9	14.0	14.1
Gavins Point	10.6	11.0	17.4	16.6	15.2	15.2	15.2

- (1) Tributary uses above the 1949 level of development including agricultural depletions and tributary storage effects.
(2) Net evaporation is shown for 2008.
(3) Incremental inflows to reach which exceed those usable in support of navigation at the target level, even if Gavins Point releases were held to as low as 6,000 cfs.
(4) Estimated requirement for downstream water supply and water quality in 2008 is approximately 6.0 MAF.
(5) Increased releases required for endangered species regulation.
(6) Includes flood control releases for flood control storage evacuation and releases used to extend the navigation season beyond the normal December 1 closing date at the mouth of the Missouri River.
(7) Releases for flood control storage evacuation in excess of a 15,000 cfs Fort Randall release.

VII. TENTATIVE PROJECTION OF REGULATION THROUGH MARCH 2015

The 5-year extensions to the AOP (March 2010 to March 2015) have been prepared to serve as a guide for the Western Area Power Administration's marketing activities and to provide data to allow basin interests to conduct long-term planning. Three runoff conditions are modeled in the extension studies: Median, Lower Quartile, and Lower Decile.

The navigation service level and season length criteria described in *Plate 3* were applied to the extensions. The March 15 and July 1 System storage checks shown in *Plate 3* were used to determine the flow support for navigation and other downstream uses and the navigation season length. A steady release – flow to target (SR-FTT) regulation with cycling in May was modeled during the T&E bird species' nesting season. The Gavins Point releases to meet navigation target flows, as shown in *Plate 3* and as computed by the March 15 and July 1 System storage checks, were used prior to and following the nesting season. The September 1 System storage check was used to determine the winter System release. Navigation service support and season length, magnitudes of March and May spring pulses, March 1 reservoir unbalancing, end of year System storage, and the winter release rate for the extensions are shown on *Table VII*. The criteria considered as each year of the extensions was modeled are listed, along with the results, in *Tables VIII through X* for the Median, Lower Quartile, and Lower Decile extension studies, respectively.

A. Median Runoff. Studies 9 through 13 present the results of simulating Median runoff (24.6 MAF) from March 2010 through February 2015. The March 1, 2010 System storage would be 48.3 MAF and would rise to 53.4 MAF by March 1, 2015, 3.6 MAF below the desired March 1 storage of 57.0 MAF, the base of the annual flood control and multiple use pool. The navigation service level would gradually increase from just above the minimum service in 2010 to full service after the July 1 storage check in 2012. There would be full navigation seasons for the study period of 2010 through 2014. The winter of 2013-2014 releases would be 13,500 cfs. March and May spring pulses would occur each year, with the magnitude of the May pulse increasing from 15,000 cfs in 2010 to 15,500 cfs in 2011. The May pulses in 2012, 2013, and 2014 would be limited in order to meet downstream flow limits during the pulse. Fort Peck, Garrison, and Oahe pools rise to the elevations described in *Plate 3* that permit unbalancing by March 1, 2011. The Fort Peck "mini-test" could be conducted in 2012 by unbalancing the upper three reservoirs beginning in 2011, as shown in *Table VIII*. The Fort Peck release would average 12,800 cfs in June 2012. Fort Peck would not have to be favored again in 2013 to accommodate the full test, which would have a monthly average release of 18,200 cfs in June 2013.

TABLE VIII
NAVIGATION SERVICE SUPPORT, SPRING PULSES, UNBALANCING
AOP EXTENSION STUDIES

	2010	2011	2012	2013	2014
MEDIAN					
Spring Pulse					
March (kcfs)	5.0	5.0	5.0	5.0	5.0
May (kcfs)	15.0	15.5	14.7*	14.1*	13.7*
Flow Level Below Full Service					
Spring (kcfs)	Full-5.8	Full-3.2	Full-1.7	Full-1.1	Full-0.7
Summer/Fall (kcfs)	Full-2.5	Full-0.7	Full	Full	Full
Season Length	8 months	8 months	8 months	8 months	8 months
Reservoir Unbalancing (ft)					
Fort Peck	0	+4.2	0	-4.2	+4.2
Garrison	0	-3.0	+3.0	0	-3.0
Oahe	0	0	-3.0	+3.0	0
Dec 31 Storage (MAF)	50.4	51.7	52.3	52.7	53.4
Winter Release (kcfs)	12.5	12.5	12.8	13.5	12.7
Special Information			Peck Mini-T	Peck Full-T	
LOWER QUARTILE					
Spring Pulse					
March (kcfs)	5.0	5.0	5.0	5.0	5.0
May (kcfs)	9.6	9.6	9.7	9.9	10.4
Flow Level Below Full Service					
Spring (kcfs)	Full-6.0	Full-6.0	Full -6.0	Full -6.0	Full -6.0
Summer/Fall (kcfs)	Full -6.0	Full -6.0	Full -6.0	Full -6.0	Full -6.0
Season Length	8 mnths-30 days	8 mnths-30 days	8 mnths-30days	8 mnths-29 days	8 mnths-12 days
Reservoir Unbalancing (ft)					
Fort Peck	0	0	0	0	0
Garrison	0	0	0	0	0
Oahe	0	0	0	0	0
Dec 31 Storage (MAF)	41.1	41.3	42.1	43.9	46.4
Winter Release (kcfs)	12.5	12.5	12.5	12.5	12.5
LOWER DECILE					
Spring Pulse					
March (kcfs)	0	0	0	0	0
May (kcfs)	9.0	0	0	0	0
Flow Level Below Full Service					
Spring (kcfs)	Full-6.0	Full -6.0	Full -6.0	Full -6.0	Full -6.0
Summer/Fall (kcfs)	Full -6.0	Full -6.0	Full -6.0	Full -6.0	Full -6.0
Season Length	8 mnths-30 days	8 mnths-41 days	8 mnths-56 days	8 mnths-55 days	8 mnths-55 days
Reservoir Unbalancing (ft)					
Fort Peck	0	0	0	0	0
Garrison	0	0	0	0	0
Oahe	0	0	0	0	0
Dec 31 Storage (MAF)	36.3	34.2	33.9	34.0	34.1
Winter Release (kcfs)	12.5	12.5	12.5	12.5	12.5

*Limited by Downstream Flood-Control Limits

Table IX

Median Extension Studies - Criteria Considered in the Modeling Process

Study Number	Units	Criteria	9 2010-2011	10 2011-2012	11 2012-2013	12 2013-2014	13 2014-2015
March 1 Storage	MAF	40	48.3	50.5	52.0	52.6	53.0
- March Spring Pulse?	N/A		Yes	Yes	Yes	Yes	Yes
March 15 Storage	MAF	31/49/54.5	49.2	51.6	52.9	53.5	53.9
- Service Level	N/A or kcfs	No Sea/Min/Full Thresholds	Full -5.8	Full -3.2	Full -1.7	Full -1.1	Full -0.7
- 3rd Period March GP Q	kcfs		23.1	26.4	28.8	28.9	28.9
- April Gavins Point Q	kcfs		20.9	23.5	25.0	25.6	26.0
May 1 Storage	MAF	40	50.7	52.8	54.0	54.5	54.7
- May Spring Pulse?	N/A		Yes	Yes	Yes	Yes	Yes
- Pulse Magnitude	kcfs		15.0	15.5	14.7	14.1	13.7
- Gavins Point Cycling Qs	kcfs		22.2/25.2	24.8/27.8	26.3/29.3	26.9/29.9	27.3/30.3
- May Gavins Point Q	kcfs		26.0	28.6	30.1	30.6	30.9
- June Gavins Point Q	kcfs		25.2	27.8	29.3	29.9	30.3
July 1 Storage	MAF	50.5/57	54.3	56.2	57.1	57.5	58.2
- Service Level	N/A	Min/Full Thresholds	Full -2.5	Full -0.7	Full	Full	Full
- July Gavins Point Q	kcfs		29.1	30.9	31.6	31.6	31.6
- Aug Gavins Point Q	kcfs		30.7	32.5	33.0	33.2	33.2
- Sept Gavins Point Q	kcfs		30.1	31.9	32.4	32.6	32.6
July 1 Storage	MAF	36.5/41&46.8/51.5	54.3	56.2	57.0	57.5	58.2
- Season Length Shortening	days	61/31&31/0 Thresholds	0	0	0	0	0
- Oct Gavins Point Q	kcfs		29.5	31.3	32.0	32.0	32.0
- Nov Gavins Point Q	kcfs		28.6	30.4	31.1	31.1	31.1
September 1 Storage	MAF	55/58	53.1	54.7	55.5	55.9	55.4
- Winter Gavins Point Q	kcfs	12/17 Thresholds	12.5	12.5	12.8	13.5	12.7
End-of-Year Reservoir Storage	MAF		50.5	52.0	52.6	53.0	53.7
- Percent Full	N/A		83%	87%	88%	89%	90%
Balance/Unbalance	N/A	Bal <2227/1827/1600 ft msl	Balance	4.2 P -3.0 G	3.0 G -3.0 O	-4.2 P 3.0 O	4.2 P -3.0 G
Peck Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Garr Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Oahe Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Special Information	N/A		Peck Mini T				Peck Full T

Table X

Lower Quartile Extension Studies - Criteria Considered in the Modeling Process

Study Number	Units	Criteria	14 2010-2011	15 2011-2012	16 2012-2013	17 2013-2014	18 2014-2015
March 1 Storage	MAF	40	41.9	41.3	41.5	42.4	44.2
- March Spring Pulse?	N/A		Yes	Yes	Yes	Yes	Yes
March 15 Storage	MAF	31/49/54.5	42.7	41.2	42.4	43.4	45.3
- Service Level	N/A or kcfs	No Sea/Min/Full Thresholds	Min Service	Min Service	Min Service	Min Service	Min Service
- 3rd Period March GP Q	kcfs		26.0	26.0	26.0	26.0	26.0
- April Gavins Point Q	kcfs		23.8	23.8	23.8	23.8	23.8
May 1 Storage	MAF	40	42.7	42.8	43.2	43.4	45.3
- May Spring Pulse?	N/A		Yes	Yes	Yes	Yes	Yes
- Pulse Magnitude	kcfs		9.6	9.6	9.7	9.9	10.4
- Gavins Point Cycling Qs	kcfs		25.3/28.3	25.3/28.3	25.3/28.3	25.3/28.3	25.3/28.3
- May Gavins Point Q	kcfs		27.9	27.9	27.9	27.9	27.9
- June Gavins Point Q	kcfs		28.3	28.3	28.3	28.3	28.3
July 1 Storage	MAF	50.5/57	44.9	44.8	45.4	47.0	49.7
- Service Level	N/A	Min/Full Thresholds	Min Service	Min Service	Min Service	Min Service	Min Service
- July Gavins Point Q	kcfs		28.3	28.3	28.3	28.3	28.3
- Aug Gavins Point Q	kcfs		28.0	28.0	28.0	28.0	28.0
- Sept Gavins Point Q	kcfs		27.5	27.5	27.5	27.5	27.5
July 1 Storage	MAF	36.5/41&46.8/51.5	44.9	44.8	45.4	47.0	49.7
- Season Length Shortening	days	61/31&31/0 Thresholds	30	30	30	29	12
- Oct Gavins Point Q	kcfs		23.9	23.9	23.9	24.5	27.1
- Nov Gavins Point Q	kcfs		9.0	9.0	9.0	9.0	22.2
September 1 Storage	MAF	55/58	43.2	43.3	48.6	45.7	44.0
- Winter Gavins Point Q	kcfs	12/17 Thresholds	12.5	12.5	12.5	12.5	12.5
End-of-Year Reservoir Storage	MAF		41.3	41.5	42.4	44.2	46.4
- Percent Full	N/A		58%	58%	61%	66%	72%
Balance/Unbalance	N/A	Bal <2227/1827/1600 ft msl	Balance	Balance	Balance	Balance	Balance
Peck Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Garr Rise 3/31-6/30	N/A		No	Yes	Yes	Yes	Yes
Oahe Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Special Information	N/A						

Table XI

Lower Decile Extension Studies - Criteria Considered in the Modeling Process

Study Number	Units	Criteria	19 2010-2011	20 2011-2012	21 2012-2013	22 2013-2014	23 2014-2015
March 1 Storage	MAF	40	39.2	37.3	34.2	33.9	34.0
- March Spring Pulse?	N/A		No	No	No	No	No
March 15 Storage	MAF	31/49/54.5	39.8	37.9	35.0	34.8	34.9
- Service Level	N/A or kcfs	No Sea/Min/Full Thresholds	Min Service	Min Service	Min Service	Min Service	Min Service
- 3rd Period March GP Q	kcfs		23.8	23.8	23.8	23.8	23.8
- April Gavins Point Q	kcfs		23.8	23.8	23.8	23.8	23.8
May 1 Storage	MAF	40	40.2	39.3	35.4	35.4	35.4
- May Spring Pulse?	N/A		Yes	No	No	No	No
- Pulse Magnitude	kcfs		9.6	9.6	9.7	9.9	10.4
- Gavins Point Cycling Qs	kcfs		25.3/28.3	25.3/28.3	25.3/28.3	25.3/28.3	25.3/28.3
- May Gavins Point Q	kcfs		27.8	25.9	25.9	25.9	25.9
- June Gavins Point Q	kcfs		28.3	28.3	28.3	28.3	28.3
July 1 Storage	MAF	50.5/57	41.0	39.3	37.1	37.3	37.3
- Service Level	N/A	Min/Full Thresholds	Min Service	Min Service	Min Service	Min Service	Min Service
- July Gavins Point Q	kcfs		28.3	28.3	28.3	28.3	28.3
- Aug Gavins Point Q	kcfs		28.0	28.0	28.0	28.0	28.0
- Sept Gavins Point Q	kcfs		27.5	27.5	26.9	27.2	27.2
July 1 Storage	MAF	36.5/41&46.8/51.5	41.0	39.3	37.1	37.3	37.3
- Season Length Shortening	days	61/31&31/0 Thresholds	30	41	56	55	55
- Oct Gavins Point Q	kcfs		23.9	17.5	9.3	9.6	9.6
- Nov Gavins Point Q	kcfs		9.0	9.0	9.0	9.0	9.0
September 1 Storage	MAF	55/58	38.8	36.0	35.1	35.1	35.3
- Winter Gavins Point Q	kcfs	12/17 Thresholds	12.5	12.5	12.5	12.5	12.5
End-of-Year Reservoir Storage	MAF		37.3	34.2	33.9	34.0	34.2
- Percent Full	N/A		47%	39%	38%	39%	39%
Balance/Unbalance	N/A	Bal <2227/1827/1600 ft msl	Balance	Balance	Balance	Balance	Balance
Peck Rise 3/31-6/30	N/A		Yes	Yes	Yes	Yes	Yes
Garr Rise 3/31-6/30	N/A		Yes	Yes	No	Yes	No
Oahe Rise 3/31-6/30	N/A		No	No	Yes	No	Yes
Special Information	N/A						


B. **Lower Quartile Runoff.** Studies 14 through 18 show the results of Lower Quartile runoff extensions. System storage on March 1, 2010 is 41.9 MAF and rises to 46.8 MAF by March 1, 2015, with navigation service levels remaining at minimum service during the simulation period. The navigation season is shortened 30 days in 2010, 2011 and 2012, 29 days in 2013, and 12 days in 2014 as System storage increases. A 12,500-cfs average winter release is shown for the entire study period. Spring pulses would occur every March and May from 2010 through 2014. The magnitude of these three May pulses are about 75 percent of those in the early years of the Median runs because of the reduction in the magnitude made for the runoff forecasts at and below Lower Quartile. Since the upper three reservoirs do not refill enough to meet the unbalancing criteria in *Plate 3* under Lower Quartile runoff, the carryover multiple use storage is balanced each March 1.

C. **Lower Decile Runoff.** Studies 19 through 23 show the results of Lower Decile runoff extensions. System storage is 39.2 MAF on March 1, 2010 and gradually decreasing to 34.2 MAF on March 1, 2015. All extension years have minimum navigation service levels for both navigation seasons. The navigation season is shortened 30 days in 2010, 41 days in 2011, 56 days in 2012, and 55 days in 2013 and 2014. There are no March spring pulses and only a May spring pulse in 2010, and no intrasystem unbalancing for the entire study period due to low System storage.

Plate 14 presents System storage, Gavins Point releases, and System peaking capability for Median, Lower Quartile, and Lower Decile runoff for the period 2010 through February 2015. Peak power, or peaking capability, is the amount of power available when all powerplants are operating at maximum.

Plate 15 presents reservoir pool elevations for Fort Peck, Garrison, Oahe, and Fort Randall for Median, Lower Quartile, and Lower Decile runoff for the period 2010 through February 2015.

This page intentionally left blank.

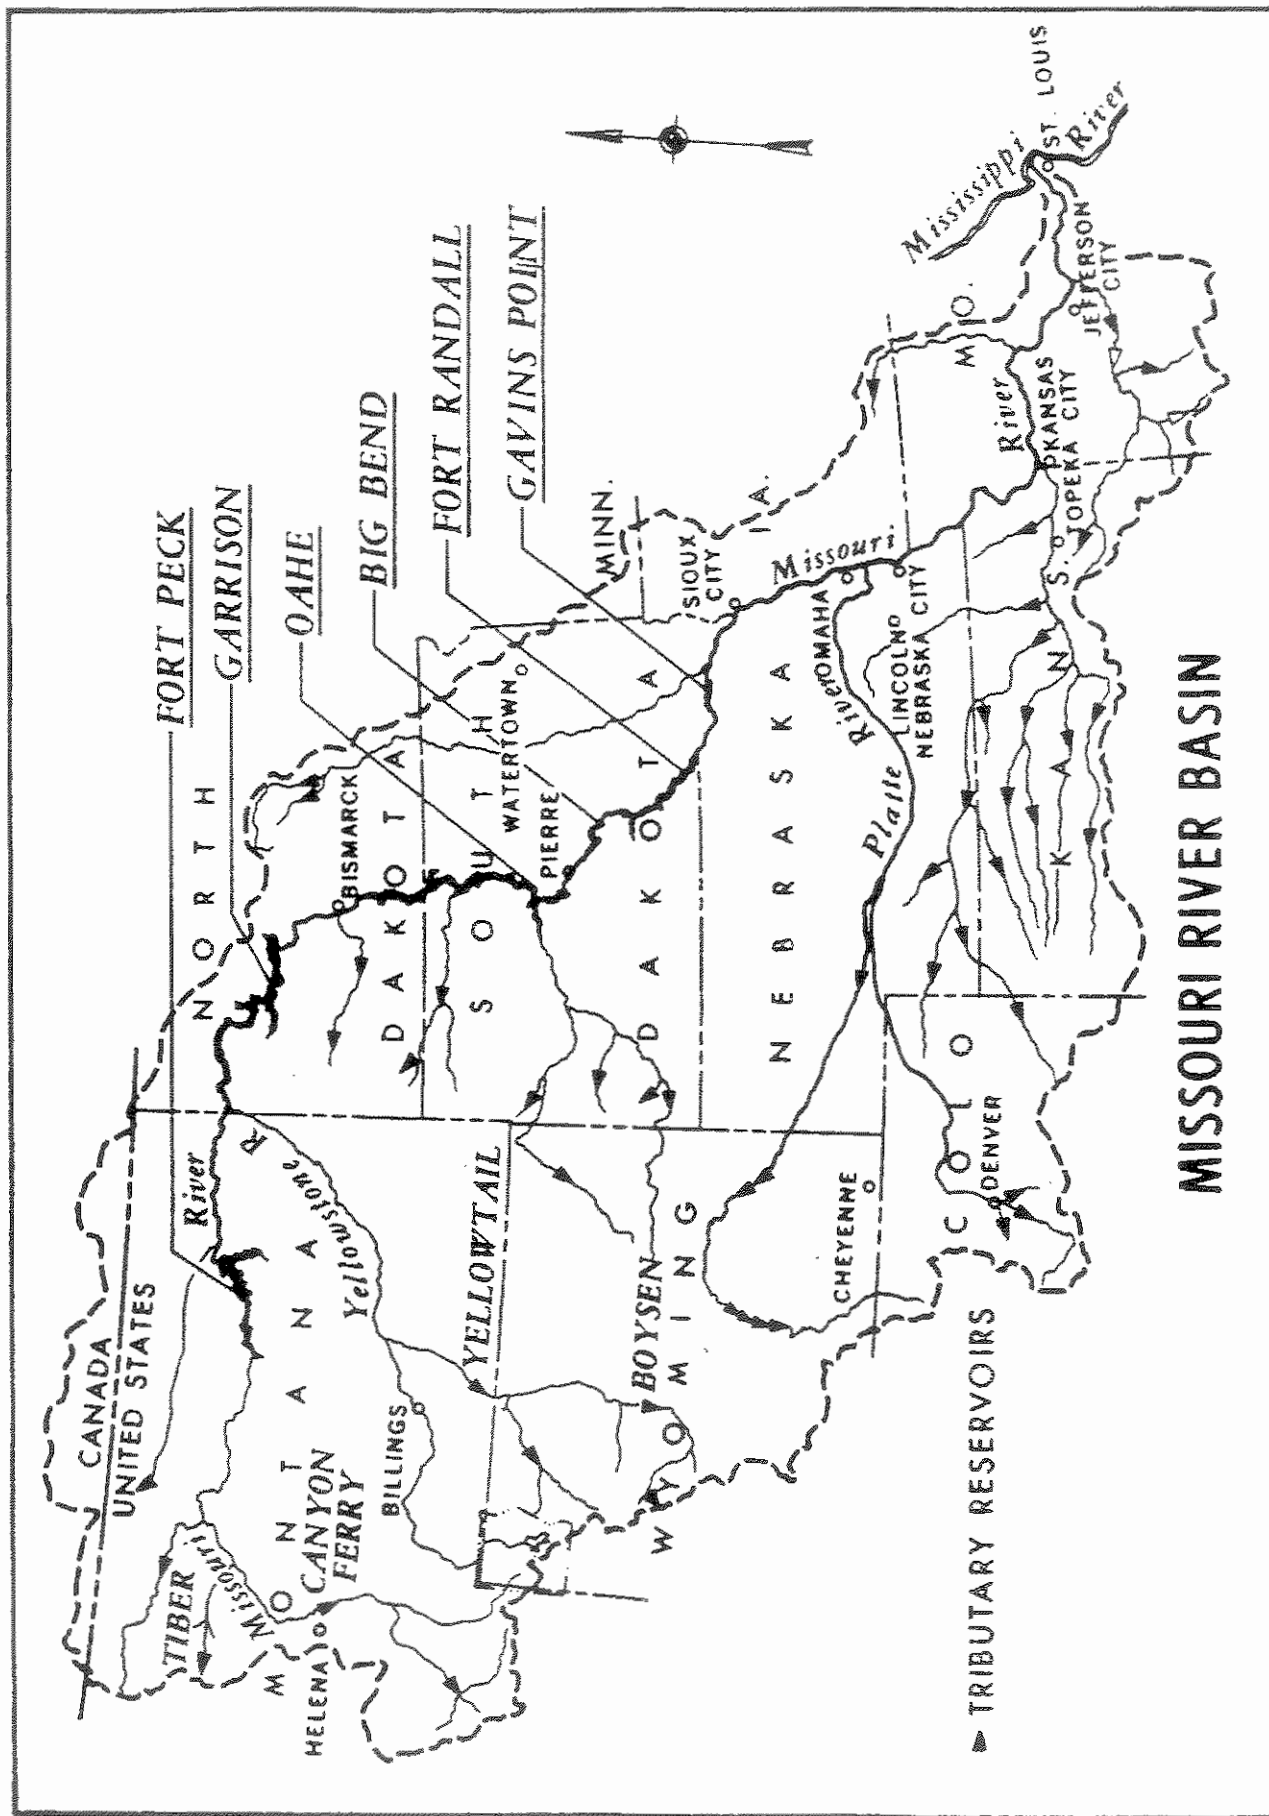

Summary of Engineering Data -- Missouri River Mainstem System							
Item No.	Subject	Fort Peck Dam - Fort Peck Lake		Garrison Dam - Lake Sakakawea		Oahe Dam - Lake Oahe	
1	Location of Dam	Near Glasgow, Montana		Near Garrison, ND		Near Pierre, SD	
2	River Mile - 1960 Mileage	Mile 1771.5		Mile 1389.9		Mile 1072.3	
3	Total & incremental drainage areas in square miles	57,500		181,400 (2)	123,900	243,490 (1)	62,090
4	Approximate length of full reservoir (in valley miles)	134, ending near Zortman, MT		178, ending near Trenton, ND		231, ending near Bismarck, ND	
5	Shoreline in miles (3)	1520 (elevation 2234)		1340 (elevation 1837.5)		2250 (elevation 1607.5)	
6	Average total & incremental inflow in cfs	10,200		25,600	15,400	28,900	3,300
7	Max. discharge of record near damsite in cfs	137,000 (June 1953)		348,000 (April 1952)		440,000 (April 1952)	
8	Construction started - calendar yr.	1933		1946		1948	
9	In operation (4) calendar yr.	1940		1955		1962	
<u>Dam and Embankment</u>							
10	Top of dam, elevation in feet msl	2280.5		1875		1660	
11	Length of dam in feet	21,026 (excluding spillway)		11,300 (including spillway)		9,300 (excluding spillway)	
12	Damming height in feet (5)	220		180		200	
13	Maximum height in feet (5)	250.5		210		245	
14	Max. base width, total & w/o berms in feet	3500, 2700		3400, 2050		3500, 1500	
15	Abutment formations (under dam & embankment)	Bearpaw shale and glacial fill		Fort Union clay shale		Pierre shale	
16	Type of fill	Hydraulic & rolled earth fill		Rolled earth filled		Rolled earth fill & shale berms	
17	Fill quantity, cubic yards	125,628,000		66,500,000		55,000,000 & 37,000,000	
18	Volume of concrete, cubic yards	1,200,000		1,500,000		1,045,000	
19	Date of closure	24 June 1937		15 April 1953		3 August 1958	
<u>Spillway Data</u>							
20	Location	Right bank - remote		Left bank - adjacent		Right bank - remote	
21	Crest elevation in feet msl	2225		1825		1596.5	
22	Width (including piers) in feet	820 gated		1336 gated		456 gated	
23	No., size and type of gates	16 - 40' x 25' vertical lift gates		28 - 40' x 29' Tainter		8 - 50' x 23.5' Tainter	
24	Design discharge capacity, cfs	275,000 at elev 2253.3		827,000 at elev 1858.5		304,000 at elev 1644.4	
25	Discharge capacity at maximum operating pool in cfs	230,000		660,000		80,000	
<u>Reservoir Data (6)</u>							
26	Max. operating pool elev. & area	2250 msl	246,000 acres	1854 msl	380,000 acres	1620 msl	374,000 acres
27	Max. normal op. pool elev. & area	2246 msl	240,000 acres	1850 msl	364,000 acres	1617 msl	360,000 acres
28	Base flood control elev & area	2234 msl	212,000 acres	1837.5 msl	307,000 acres	1607.5 msl	312,000 acres
29	Min. operating pool elev. & area	2160 msl	90,000 acres	1775 msl	128,000 acres	1540 msl	117,000 acres
<u>Storage allocation & capacity</u>							
30	Exclusive flood control	2250-2246	975,000 a.f.	1854-1850	1,489,000 a.f.	1620-1617	1,102,000 a.f.
31	Flood control & multiple use	2246-2234	2,717,000 a.f.	1850-1837.5	4,222,000 a.f.	1617-1607.5	3,201,000 a.f.
32	Carryover multiple use	2234-2160	10,785,000 a.f.	1837.5-1775	13,130,000 a.f.	1607.5-1540	13,461,000 a.f.
33	Permanent	2160-2030	4,211,000 a.f.	1775-1673	4,980,000 a.f.	1540-1415	5,373,000 a.f.
34	Gross	2250-2030	18,688,000 a.f.	1854-1673	23,821,000 a.f.	1620-1415	23,137,000 a.f.
35	Reservoir filling initiated	November 1937		December 1953		August 1958	
36	Initially reached min. operating pool	27 May 1942		7 August 1955		3 April 1962	
37	Estimated annual sediment inflow	17,700 a.f.	1030 yrs.	25,900 a.f.	920 yrs.	19,800 a.f.	1170 yrs.
<u>Outlet Works Data</u>							
38	Location	Right bank		Right Bank		Right Bank	
39	Number and size of conduits	2 - 24' 8" diameter (nos. 3 & 4)		1 - 26' dia. and 2 - 22' dia.		6 - 19.75' dia. upstream, 18.25' dia. downstream	
40	Length of conduits in feet (8)	No. 3 - 6,615, No. 4 - 7,240		1529		3496 to 3659	
41	No., size, and type of service gates	1 - 28' dia. cylindrical gate 6 ports, 7.6' x 8.5' high (net opening) in each control shaft		1 - 18' x 24.5' Tainter gate per conduit for fine regulation		1 - 13' x 22' per conduit, vertical lift, 4 cable suspension and 2 hydraulic suspension (fine regulation)	
42	Entrance invert elevation (msl)	2095		1672		1425	
43	Avg. discharge capacity per conduit & total	Elev. 2250		Elev. 1854		Elev. 1620	
44	Present tailwater elevation (ft msl)	2032-2036	22,500 cfs - 45,000 cfs 5,000 - 35,000 cfs	1670-1680	30,400 cfs - 98,000 cfs 15,000 - 60,000 cfs	1423-1428	18,500 cfs - 111,000 cfs 20,000-55,000 cfs
<u>Power Facilities and Data</u>							
45	Avg. gross head available in feet (14)	194		161		174	
46	Number and size of conduits	No. 1-24'8" dia., No. 2-22'4" dia.		5 - 29' dia., 25' penstocks		7 - 24' dia., imbedded penstocks	
47	Length of conduits in feet (8)	No. 1 - 5,653, No. 2 - 6,355		1829		From 3,280 to 4,005	
48	Surge tanks	PH#1: 3-40' dia., PH#2: 2-65' dia.		65' dia. - 2 per penstock		70' dia., 2 per penstock	
49	No., type and speed of turbines	5 Francis, PH#1-2: 128.5 rpm. 1-164 rpm, PH#2-2: 128.6 rpm		5 Francis, 90 rpm		7 Francis, 100 rpm	
50	Discharge cap. at rated head in cfs	PH#1, units 1&3 170', 2-140' 8,800 cfs, PH#2-4&5 170'-7,200 cfs		150'	41,000 cfs	185'	54,000 cfs
51	Generator nameplate rating in kW	1&3, 43,500; 2: 18,250; 4&5: 40,000		3 - 121,600, 2 - 109,250		112,290	
52	Plant capacity in kW	185,250		583,300		786,030	
53	Dependable capacity in kW (9)	181,000		388,000		534,000	
54	Avg. annual energy, million kWh (12)	1,075		2,293		2,677	
55	Initial generation, first and last unit	July 1943 - June 1961		January 1956 - October 1960		April 1962 - June 1963	
56	Estimated cost September 1999 completed project (13)	\$158,428,000		\$305,274,000		\$346,521,000	

Summary of Engineering Data -- Missouri River Mainstem System

Big Bend Dam - Lake Sharpe		Fort Randall Dam - Lake Francis Case		Gavins Point Dam - Lewis & Clark Lake		Total	Item No.	Remarks
21 miles upstream Chamberlain, SD		Near Lake Andes, SD		Near Yankton, SD			1	(1) Includes 4,280 square miles of non-contributing areas.
Mile 987.4		Mile 880.0		Mile 811.1			2	
249,330 (1)	5,840	263,480 (1)	14,150	279,480 (1)	16,000		3	
80, ending near Pierre, SD		107, ending at Big Bend Dam		25, ending near Niobrara, NE		755 miles	4	(2) Includes 1,350 square miles of non-contributing areas.
200 (elevation 1420)		540 (elevation 1350)		90 (elevation 1204.5)		5,940 miles	5	(3) With pool at base of flood control.
28,900		30,000	1,100	32,000	2,000		6	
440,000 (April 1952)		447,000 (April 1952)		480,000 (April 1952)			7	(4) Storage first available for regulation of flows.
1959		1946		1952			8	(5) Damming height is height from low water to maximum operating pool. Maximum height is from average streambed to top of dam.
1964		1953		1955			9	
1440		1395		1234			10	
10,570 (including spillway)		10,700 (including spillway)		8,700 (including spillway)		71,596	11	(6) Based on latest available storage data.
78		140		45		863 feet	12	
95		165		74			13	(7) River regulation is attained by flows over low-crested spillway and through turbines.
1200, 700		4300, 1250		850, 450			14	
Pierre shale & Niobrara chalk		Niobrara chalk		Niobrara chalk & Carlile shale			15	(8) Length from upstream face of outlet or to spiral case.
Rollled earth, shale, chalk fill		Rollled earth fill & chalk berms		Rollled earth & chalk fill			16	
17,000,000		28,000,000 & 22,000,000		7,000,000		358,128,000 cu. yds	17	(9) Based on 8th year (1961) of drought drawdown (From study 8-83-1985).
540,000		961,000		308,000		5,554,000 cu. yds.	18	
24 July 1963		20 July 1952		31 July 1955			19	
Left bank - adjacent		Left bank - adjacent		Right bank - adjacent			20	(10) Affected by level of Lake Francis case. Applicable to pool at elevation 1350.
1385		1346		1180			21	
576 gated		1000 gated		664 gated			22	(11) Spillway crest.
8 - 40' x 38' Tainter		21 - 40' x 29' Tainter		14 - 40' x 30' Tainter			23	(12) 1967-2006 Average
390,000 at elev 1433.6		620,000 at elev 1379.3		584,000 at elev 1221.4			24	(13) Source: Annual Report on Civil Works Activities of the Corps of Engineers. Extract Report Fiscal Year 1999.
270,000		508,000		345,000			25	
1423 msl	61,000 acres	1375 msl	102,000 acres	1210 msl	31,000 acres	1,194,000 acres	26	(14) Based on Study 8-83-1985
1422 msl	60,000 acres	1365 msl	95,000 acres	1208 msl	28,000 acres	1,147,000 acres	27	
1420 msl	57,000 acres	1350 msl	77,000 acres	1204.5 msl	24,000 acres	989,000 acres	28	
1415 msl	51,000 acres	1320 msl	38,000 acres	1204.5 msl	24,000 acres	450,000 acres	29	
1423-1422	60,000 a.f.	1375-1365	985,000 a.f.	1210-1208	59,000 a.f.	4,670,000 a.f.	30	
1422-1420	117,000 a.f.	1365-1350	1,309,000 a.f.	1208-1204.5	90,000 a.f.	11,656,000 a.f.	31	
		1350-1320	1,607,000 a.f.			38,983,000 a.f.	32	
1420-1345	1,621,000 a.f.	1320-1240	1,517,000 a.f.	1204.5-1160	321,000 a.f.	18,023,000 a.f.	33	
1423-1345	1,798,000 a.f.	1375-1240	5,418,000 a.f.	1210-1160	470,000 a.f.	73,332,000 a.f.	34	
November 1963		January 1953		August 1955			35	
25 March 1964		24 November 1953		22 December 1955			36	
5,300 a.f.	430 yrs.	18,400 a.f.	250 yrs.	2,600 a.f.	180 yrs.	89,700 a.f.	37	
None (7)		Left Bank		None (7)			38	
		4 - 22' diameter					39	
		1013					40	
		2 - 11' x 23' per conduit, vertical lift, cable suspension					41	
1385 (11)		1229		1180 (11)			42	
		Elev 1375					43	
		32,000 cfs - 128,000 cfs					44	
1351-1355(10)	25,000-100,000 cfs	1228-1239	5,000-60,000 cfs	1155-1163	15,000-60,000 cfs			
70		117		48		764 feet	45	
None: direct intake		8 - 28' dia., 22' penstocks		None: direct intake			46	
		1,074				55,083	47	
None		59' dia., 2 per alternate penstock		None			48	
8 Fixed blade, 81.8 rpm		8 Francis, 85.7 rpm		3 Kaplan, 75 rpm		36 units	49	
67'	103,000 cfs	112'	44,500 cfs	48'	36,000 cfs		50	
3 - 67,276, 5 - 58,500		40,000		44,100			51	
494,320		320,000		132,300		2,501,200 kw	52	
497,000		293,000		74,000		1,967,000 kw	53	Corps of Engineers, U.S. Army
988		1,757		734		9,524 million kWh	54	Compiled by
October 1964 - July 1966		March 1954 - January 1956		September 1956 - January 1957		July 1943 - July 1966	55	Northwestern Division
							56	Missouri River Region
								January 2008
\$107,498,000		\$199,066,000		\$49,617,000		\$1,166,404,000		

Plate 3

Summary of Master Manual Technical Criteria

NAVIGATION TARGET FLOWS

<u>Location</u>	<u>Minimum Service (kcfs)</u>	<u>Full Service (kcfs)</u>
Sioux City	25	31
Omaha	25	31
Nebraska City	31	37
Kansas City	35	41

RELATION OF SYSTEM STORAGE TO NAVIGATION SERVICE LEVEL

<u>Date</u>	<u>System Storage (MAF)</u>	<u>Navigation Service Level</u>
March 15	54.5 or more	35,000 cfs (full-service)
March 15	49.0 to 31	29,000 cfs (minimum-service)
March 15	31.0 or less	No navigation service
July 1	57.0 or more	35,000 cfs (full-service)
July 1	50.5 or less	29,000 cfs (minimum-service)

RELATION OF SYSTEM STORAGE TO NAVIGATION SEASON LENGTH

<u>Date</u>	<u>System Storage (MAF)</u>	<u>Final Day of Navigation Support at Mouth of the Missouri River</u>
July 1	51.5 or more	November 30 (8-month season)
July 1	46.8 through 41.0	October 31 (7-month season)
July 1	36.5 or less	September 30 (6-month season)

GAVINS POINT RELEASES NEEDED TO MEET TARGET FLOWS

1950 to 1996 Data (kcfs)								
<u>Median, Upper Quartile, Upper Decile Runoff</u>								
	<u>Apr</u>	<u>May</u>	<u>Jun</u>	<u>Jul</u>	<u>Aug</u>	<u>Sep</u>	<u>Oct</u>	<u>Nov</u>
Full Service	26.7	28.0	27.9	31.6	33.2	32.6	32.0	31.1
Minimum Service	20.7	22.0	21.9	25.6	27.2	26.6	26.0	25.1
<u>Lower Quartile, Lower Decile Runoff</u>								
	<u>Apr</u>	<u>May</u>	<u>Jun</u>	<u>Jul</u>	<u>Aug</u>	<u>Sep</u>	<u>Oct</u>	<u>Nov</u>
Full Service	29.8	31.3	31.2	34.3	34.0	33.5	33.1	31.2
Minimum Service	23.8	25.3	25.2	28.3	28.0	27.5	27.1	25.2

RESERVOIR UNBALANCING SCHEDULE

<u>Year</u>	<u>Fort Peck</u>		<u>Garrison</u>		<u>Oahe</u>	
	<u>March 1</u>	<u>Rest of Year</u>	<u>March 1</u>	<u>Rest of Year</u>	<u>March 1</u>	<u>Rest of Year</u>
1	High	Float	Low	Hold Peak	Raise & hold during spawn	Float
2	Raise & hold during spawn	Float	High	Float	Low	Hold peak
3	Low	Hold peak	Raise & hold during spawn	Float	High	Float

Notes: **Float year:** Normal regulation, then unbalance 1 foot during low pool years or 3 feet when System storage is near 57.0 MAF on March 1.

Low year: Begin low, then hold peak the remainder of the year.

High year: Begin high, raise and hold pool during spawn, then float.

MRNRC RECOMMENDED RESERVOIR ELEVATION GUIDELINES FOR UNBALANCING

	<u>Fort Peck</u>	<u>Garrison</u>	<u>Oahe</u>
Implement unbalancing if March 1 pool is above this level.	2234 feet msl	1837.5 feet msl	1607.5 feet msl
Implement unbalancing if March 1 pool level is in this range and the pool is expected to raise more than 3 feet after March 1.	2227-2234 feet msl	1827-1837.5 feet msl	1600-1607.5 feet msl
Scheduling Criteria	Avoid pool level decline during spawn period which ranges from April 15 – May 30	Schedule after spawn period of April 20 – May 20	Schedule after spawn period of April 8 – May 15

Plate 3 (cont'd)

Summary of Master Manual Technical Criteria

TECHNICAL CRITERIA FOR SPRING PULSES FROM GAVINS POINT DAM

Criteria Applicable to Both the March and May Spring Pulses

Flood Control Constraints	No change from current levels
---------------------------	-------------------------------

Criteria Applicable to the March Spring Pulse

Drought Preclude	40.0 MAF or below measured on March 1.
Drought Proration of Pulse Magnitude*	None, 5 kcfs added to navigation releases, but no greater than 35 kcfs.
Initiation of Pulse	Extend the stepped System release increases that precede the beginning of the navigation season.
Rate of Rise before Peak	Approximately 5 kcfs for 1 day.
Duration of Peak	Two days.
Rate of Fall after Peak	Drop over 5 days to navigation target release.

Criteria Applicable to Time Period Between the Bimodal Pulses

Release	Existing Master Manual Criteria
---------	---------------------------------

Criteria Applicable to the May Spring Pulse

Drought Preclude	40.0 MAF or below measured on May 1.
Proration of Pulse Magnitude Based On System Storage*	Prorated from 16 kcfs based on a May 1 System Storage check; 100% at 54.5 MAF; straight line interpolation to 75% at 40.0 MAF.
Proration of Pulse Magnitude Based On Projected Runoff*	After the proration of the spring pulse magnitude for System Storage, the resultant magnitude would be further adjusted either up or down based on the May CY runoff forecast; 100% for Median; straight-line interpolation to 125% at Upper Quartile runoff; 125% for runoff above Upper Quartile; straight-line interpolation to 75% at Lower Quartile runoff; 75% for runoff below Lower Quartile.
Initiation of Pulse	Between May 1 to May 19, depending on Missouri River water temperature immediately below Gavins Point Dam. If possible, pulse will be initiated after the second daily occurrence of a 16 degree Celsius water temperature; however, the decision will be informed by the potential for 'take' of Threatened and Endangered bird species.
Rate of Rise before Peak	Approximately 6 kcfs per day.
Duration of Peak	Two days.
Rate of Fall after Peak	Approximately 30% drop over 2 days followed by a proportional reduction in releases back to the existing Master Manual criteria over an 8-day period.


Spring Pulse Downstream Flow Limits

Omaha	41,000 cfs
Nebraska City	47,000 cfs
Kansas City	71,000 cfs

* Spring pulse magnitudes will be determined by taking the difference between pre-pulse Gavins Point releases and the peak pulse Missouri River flows measured just downstream of the mouth of the James River.


System Storage

2008-2009 Draft AOP

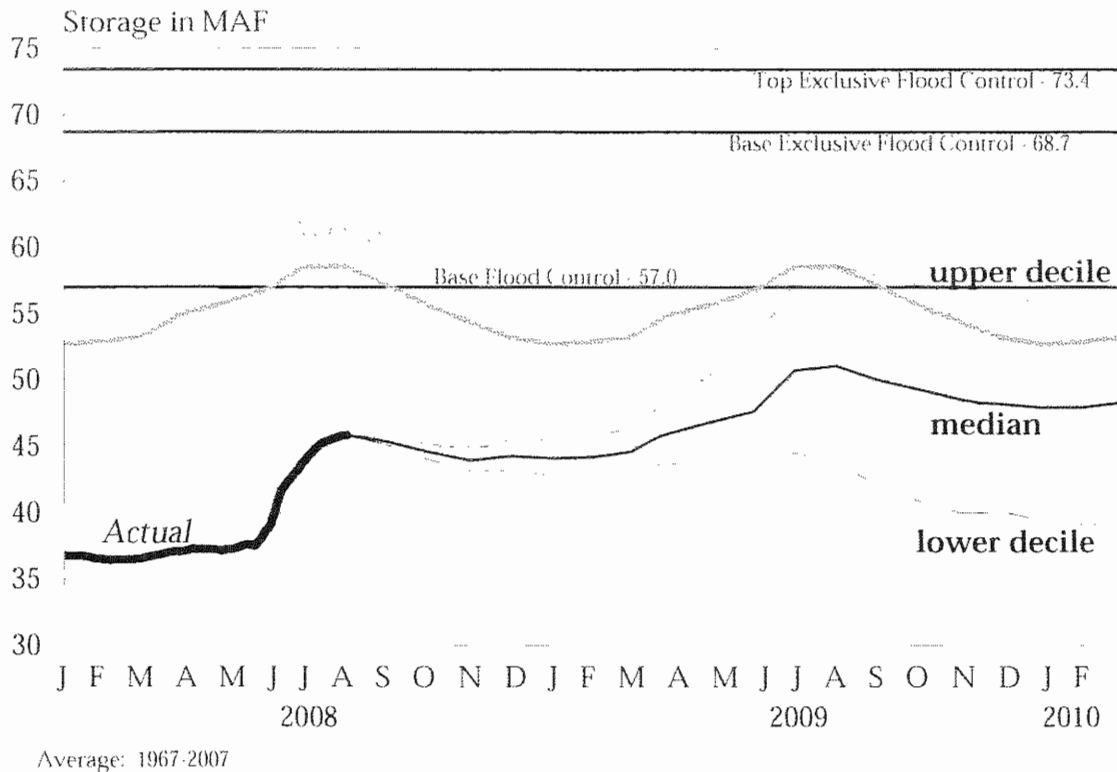


Fort Peck

2008-2009 Draft AOP

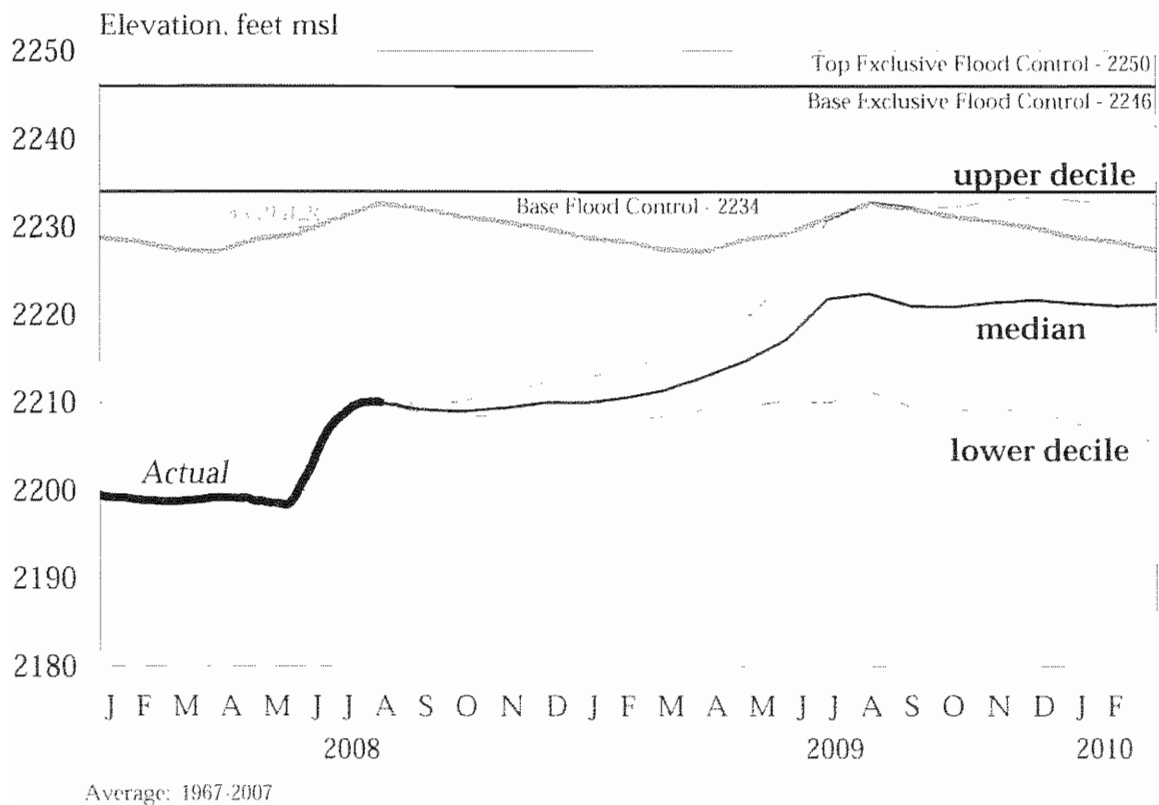


Garrison

2008-2009 Draft AOP


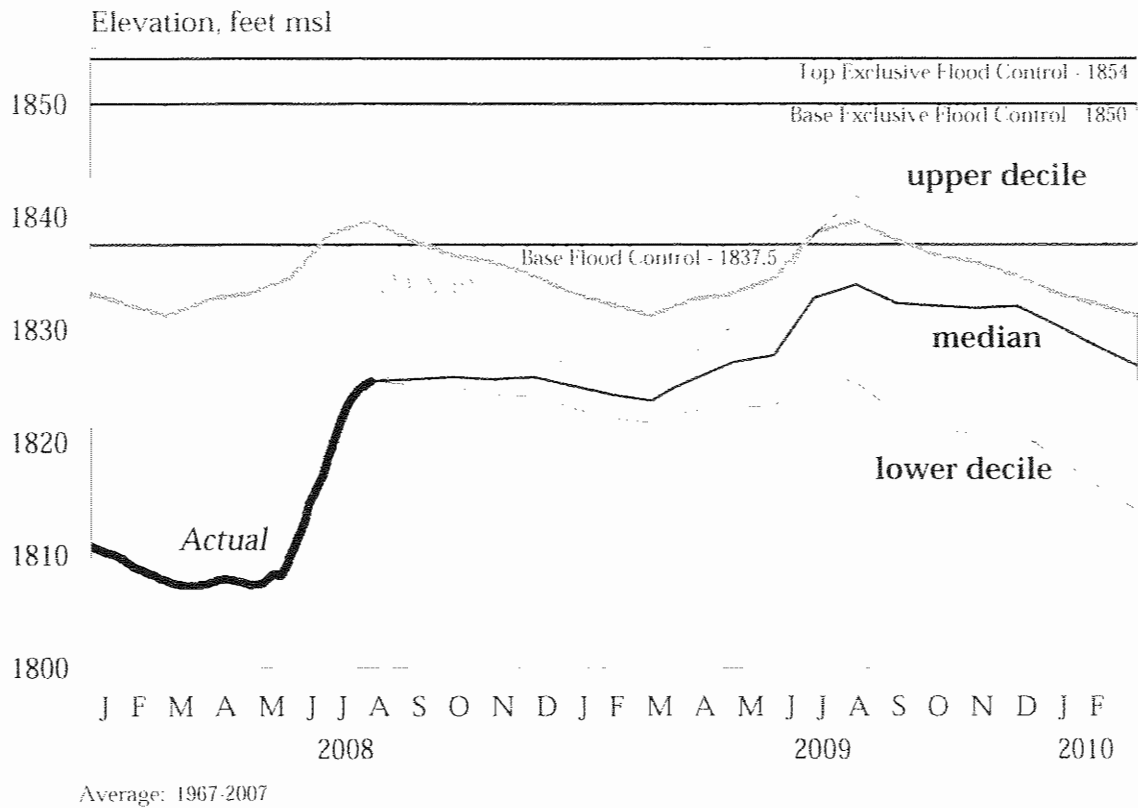


Oahe



2008-2009 Draft AOP

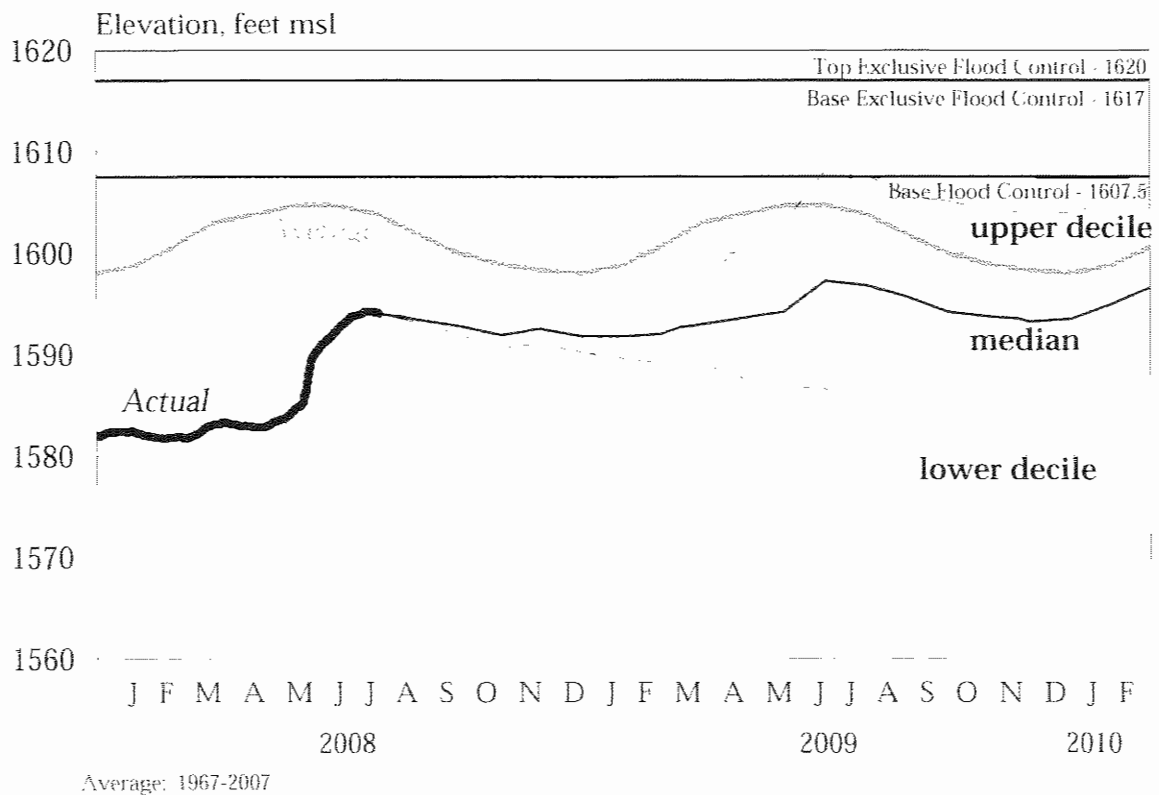



System Storage

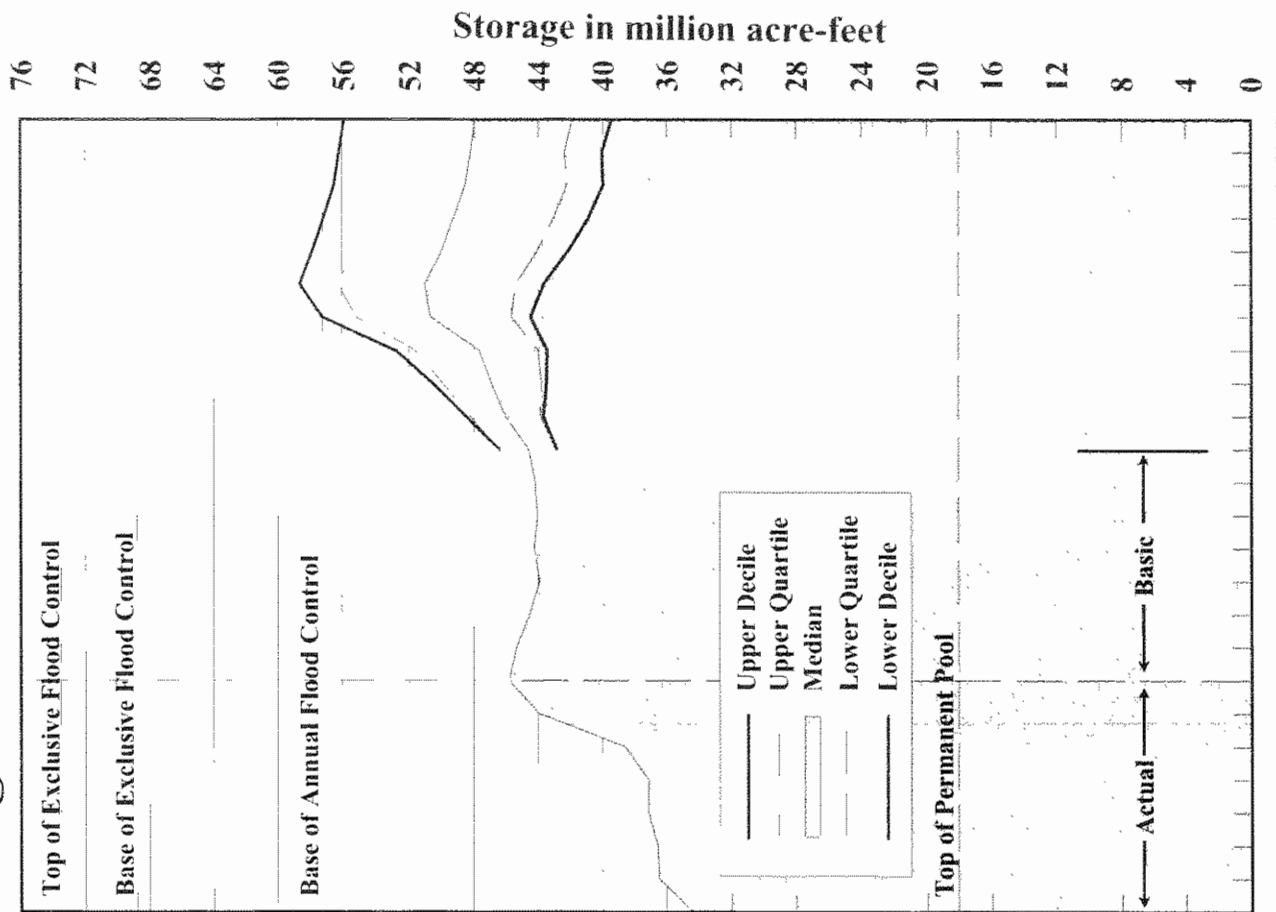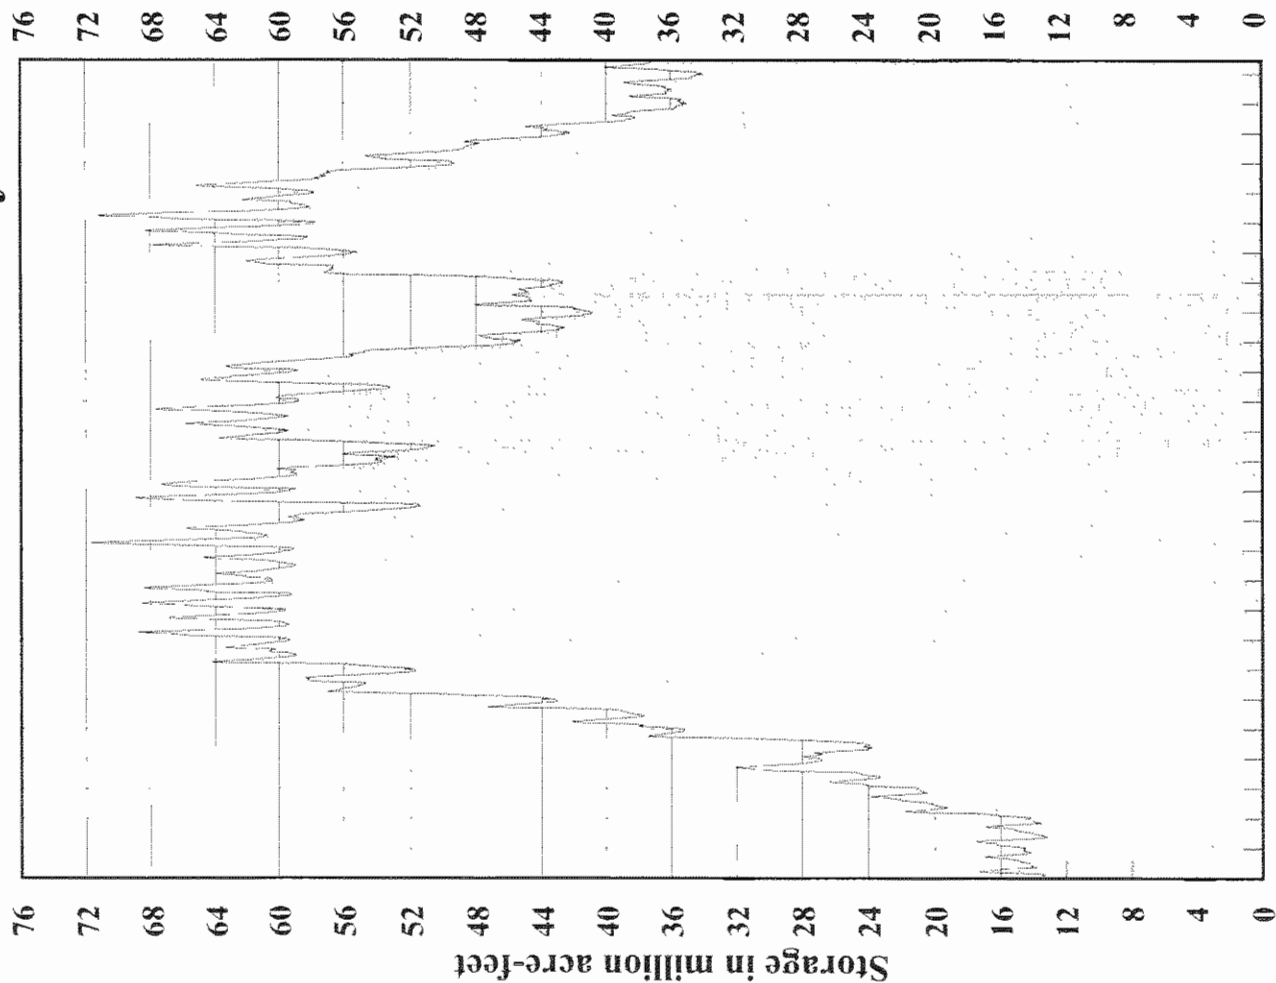


Gavins Point Releases

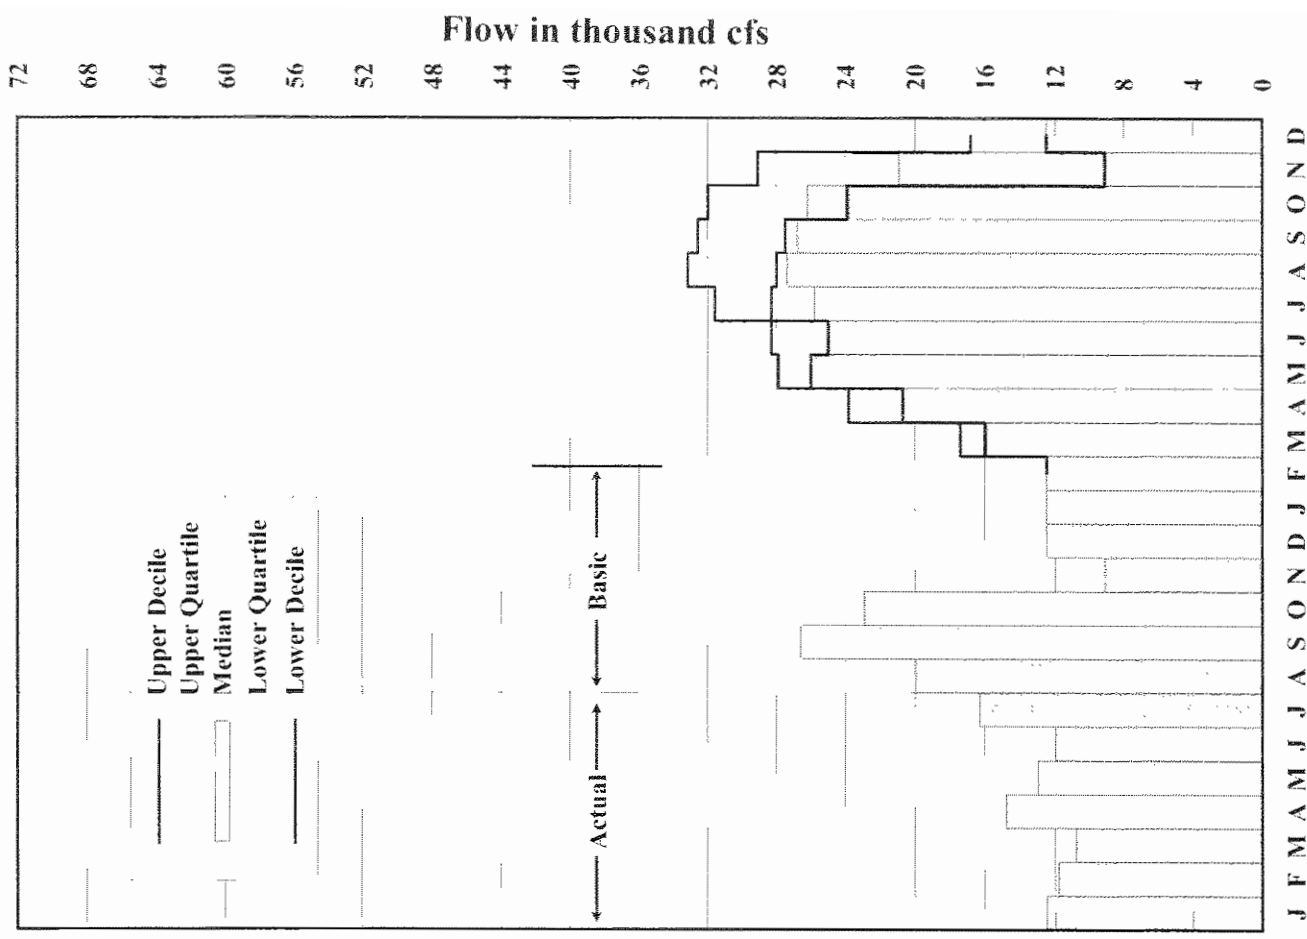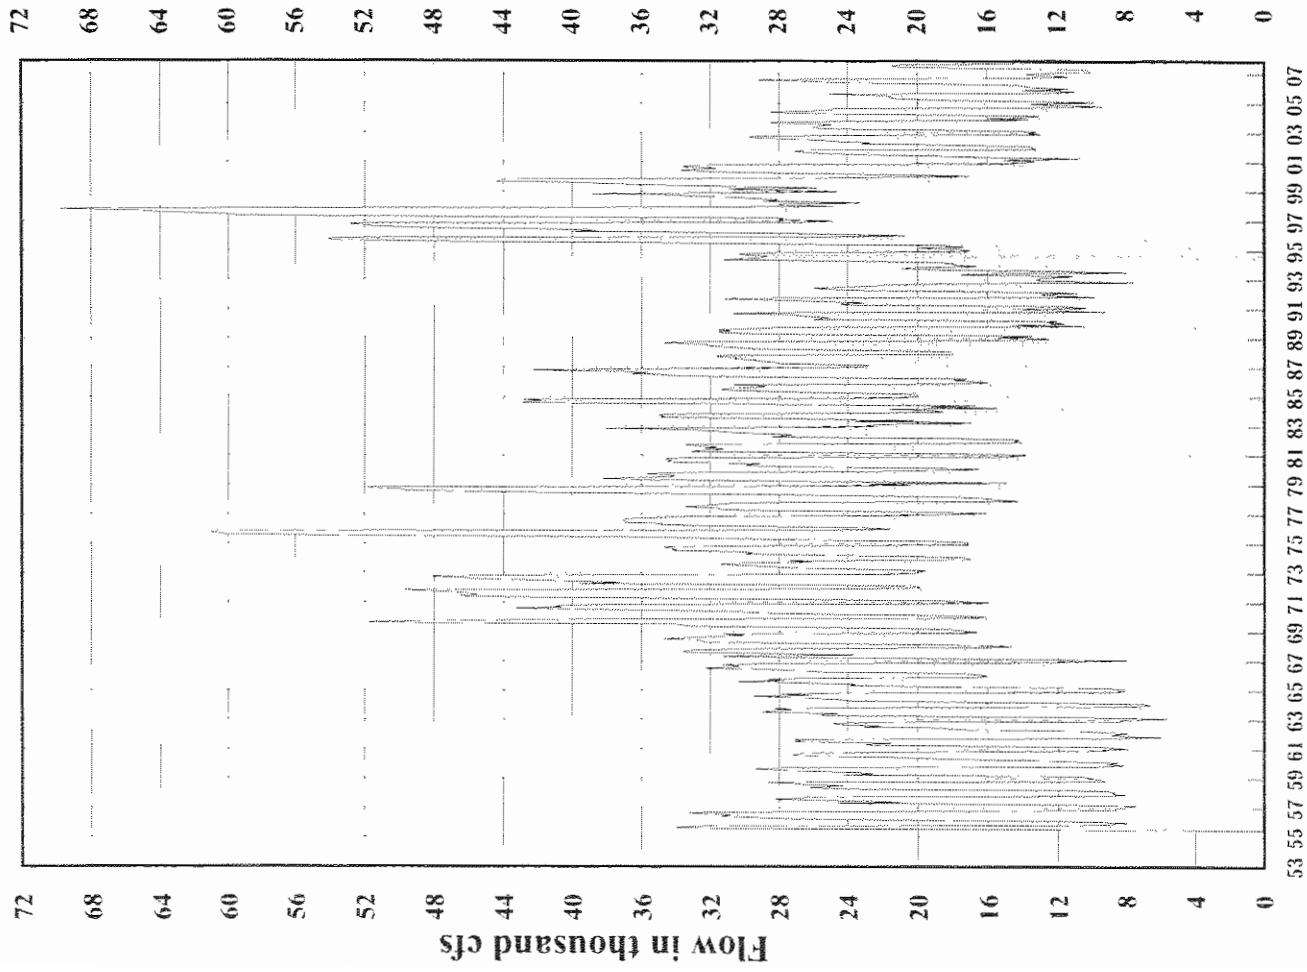


Fort Peck Elevations and Releases

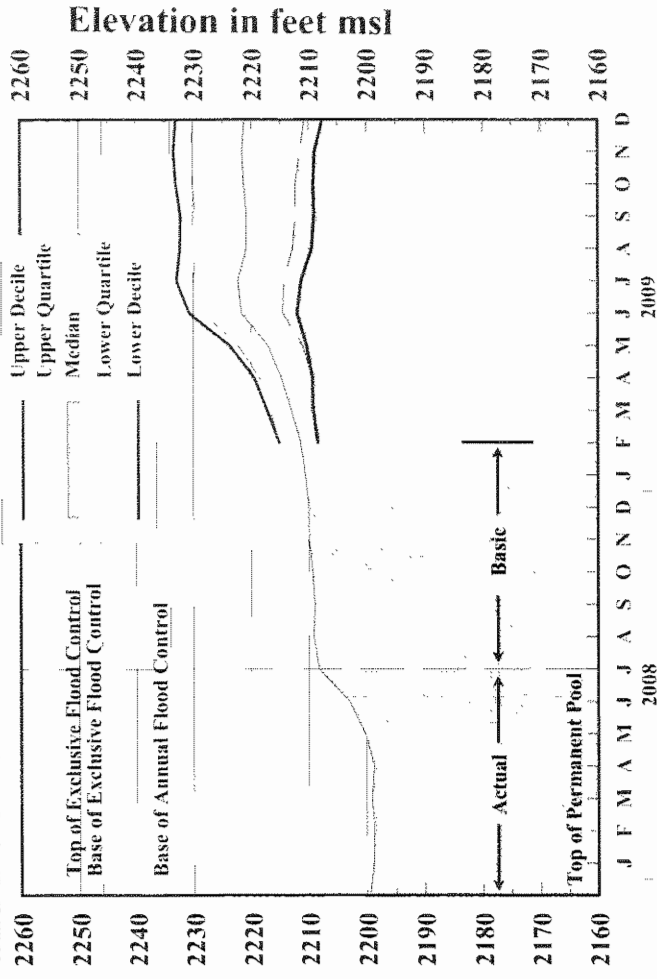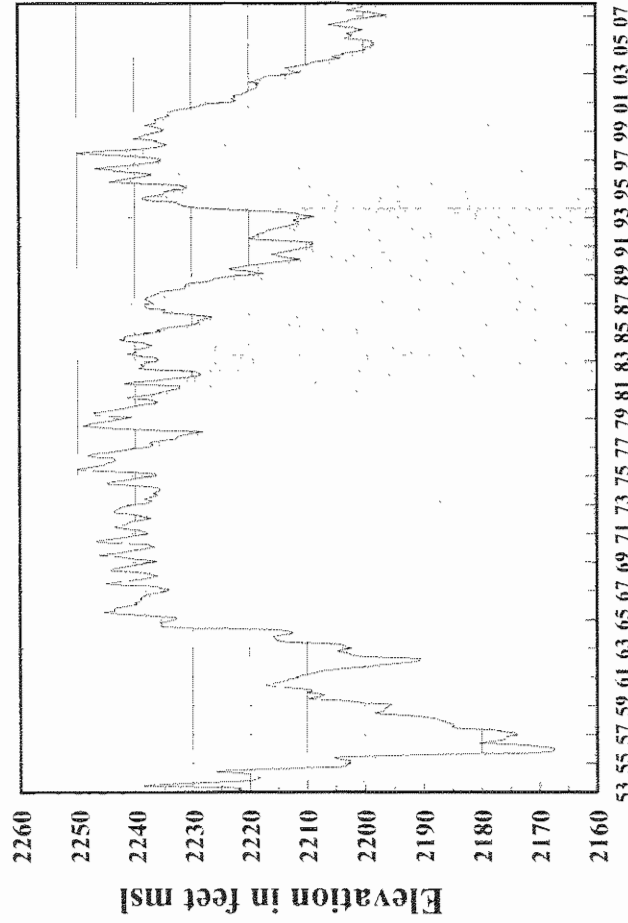





Calendar Year

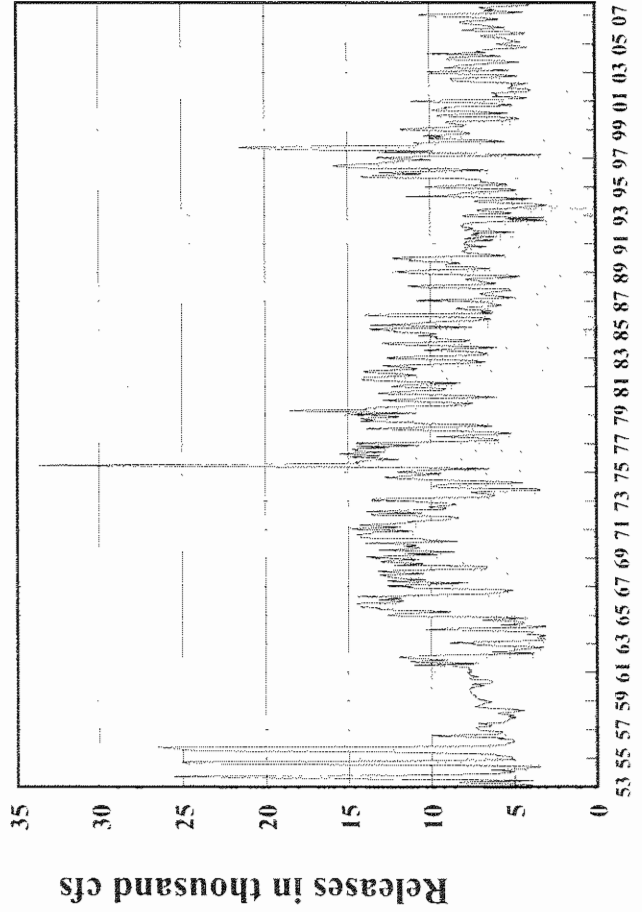





Calendar Year

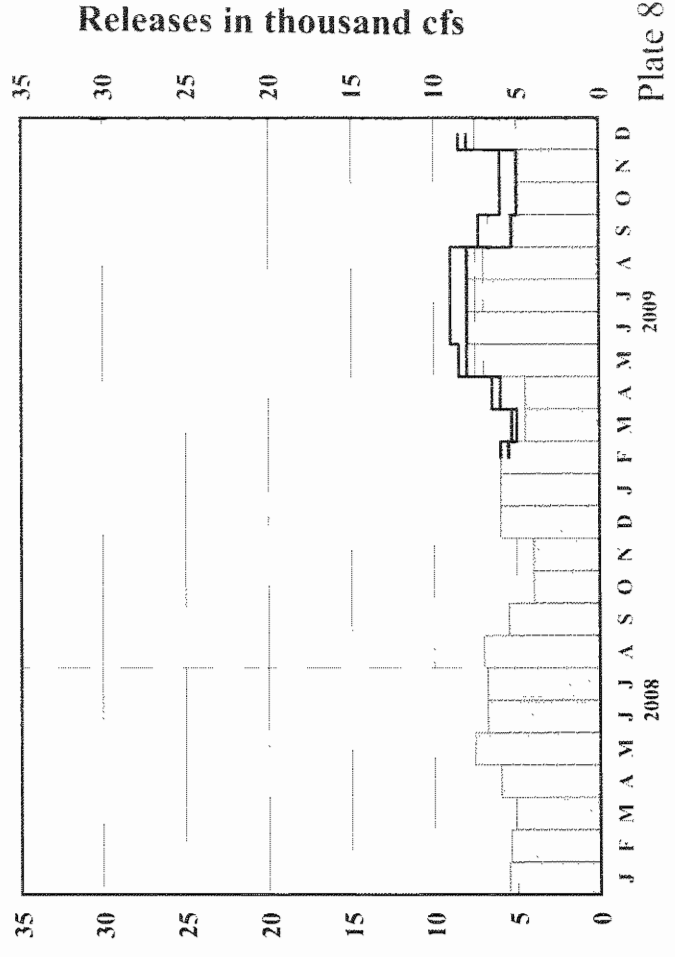



Garrison Elevations and Releases

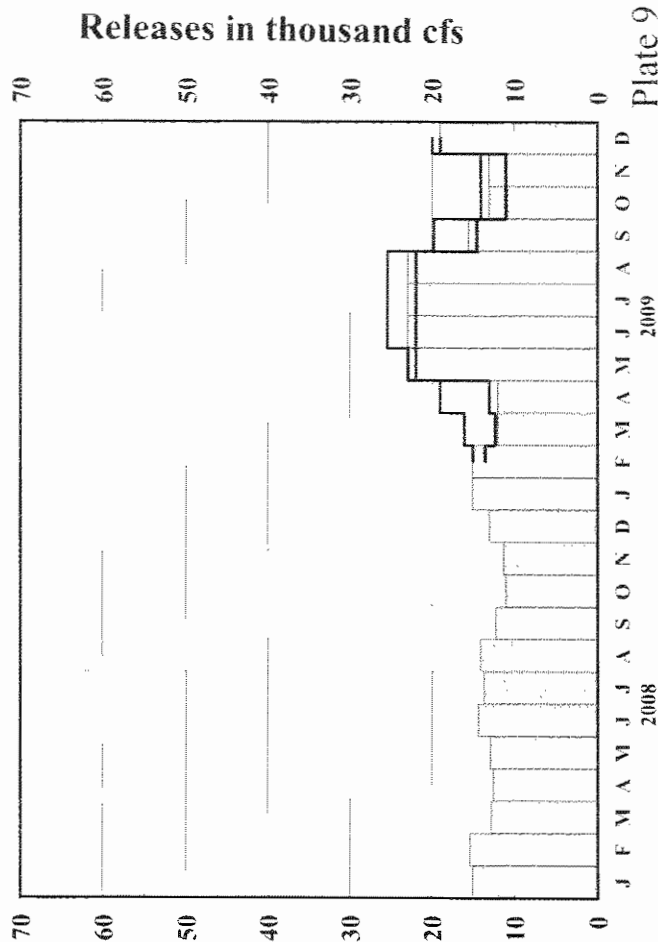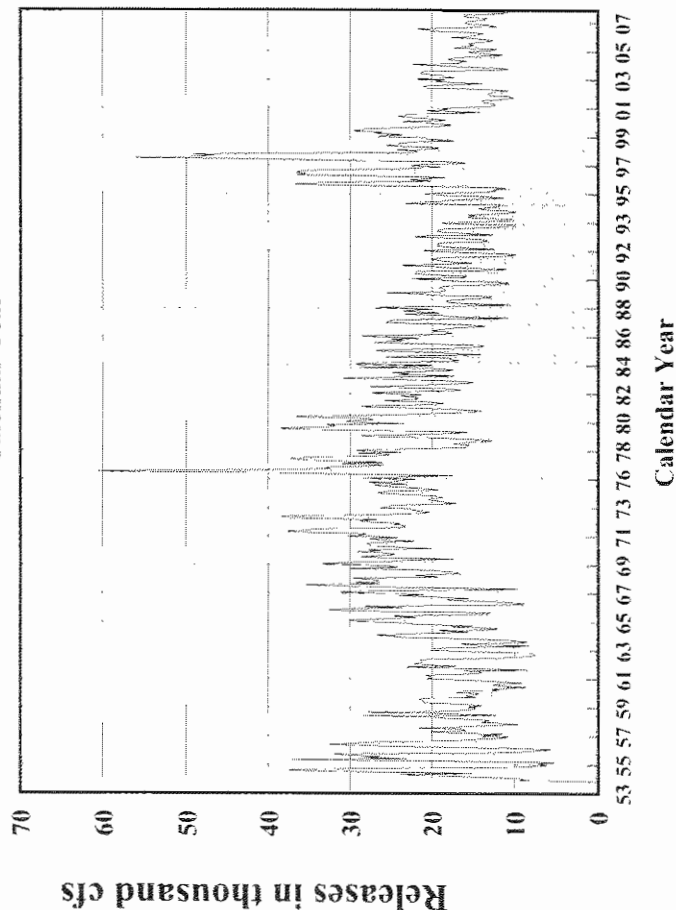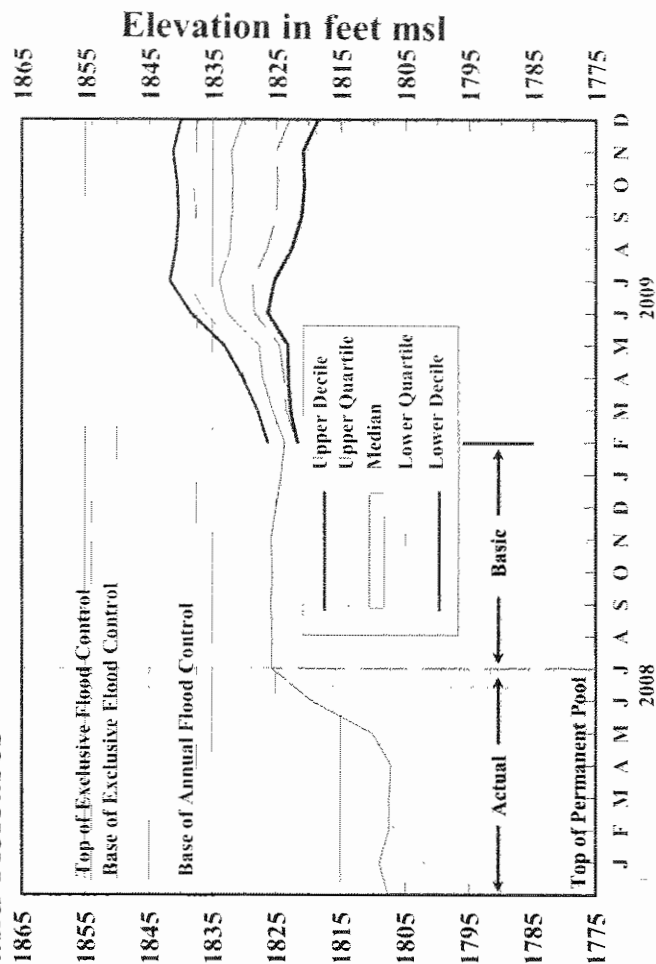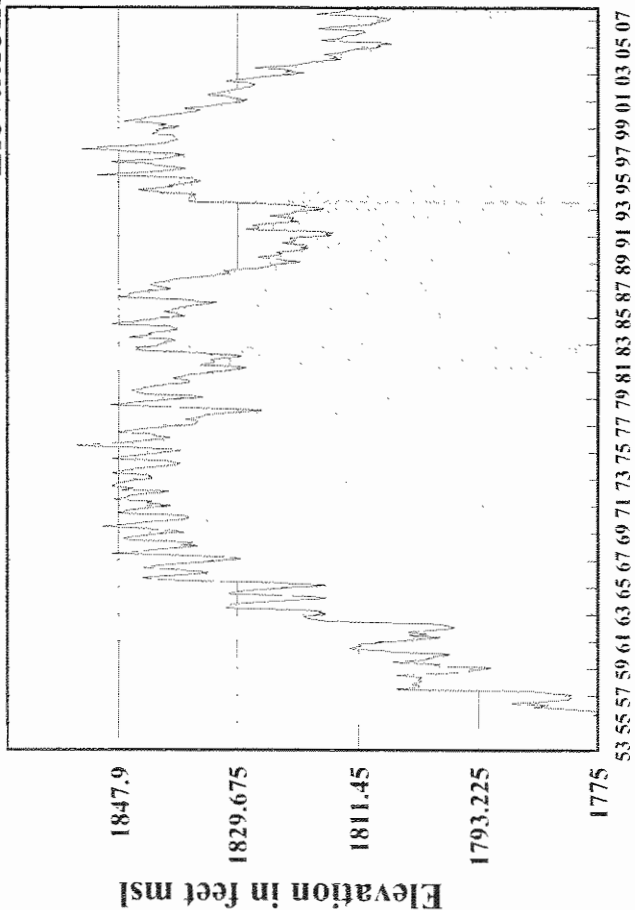

Oahe Elevations and Releases

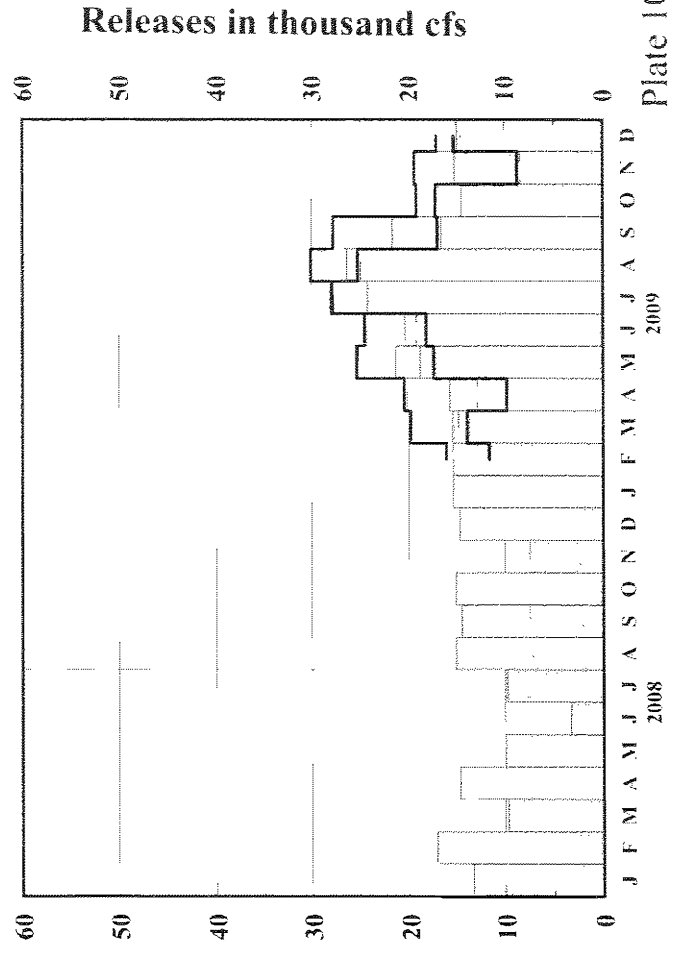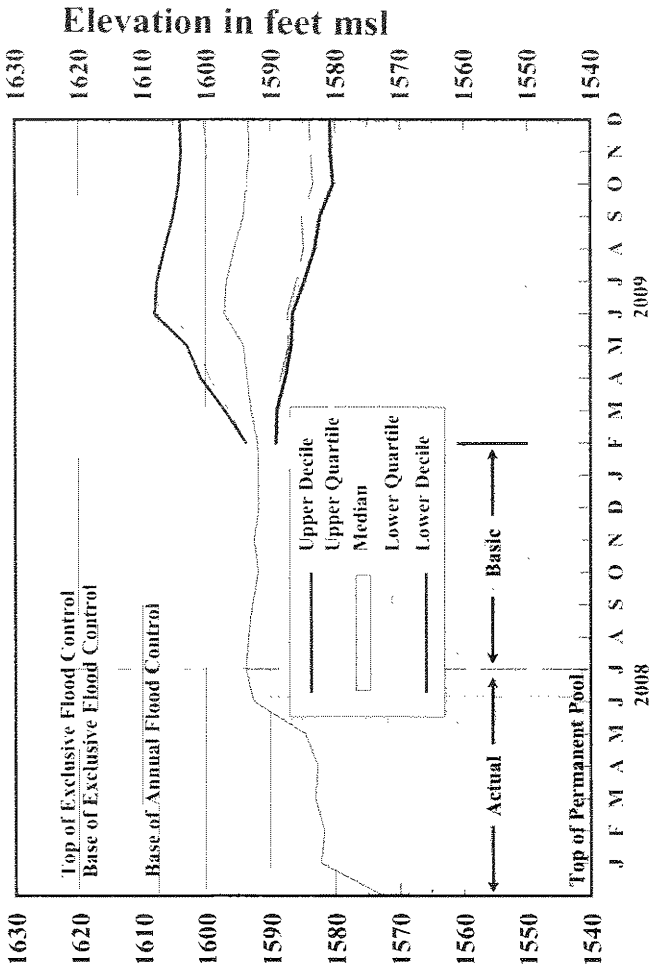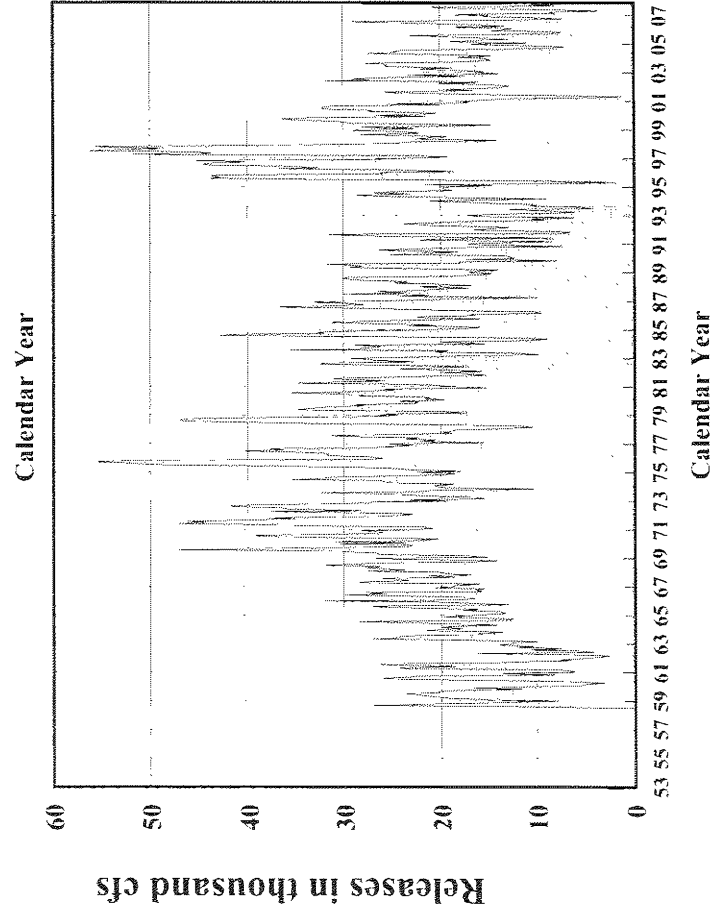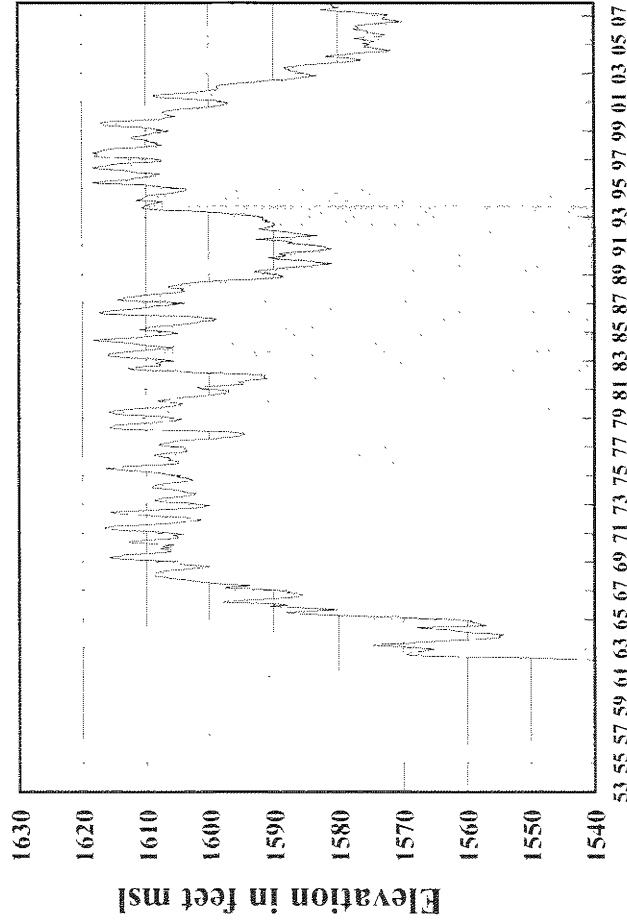


Fort Randall Elevations and Releases

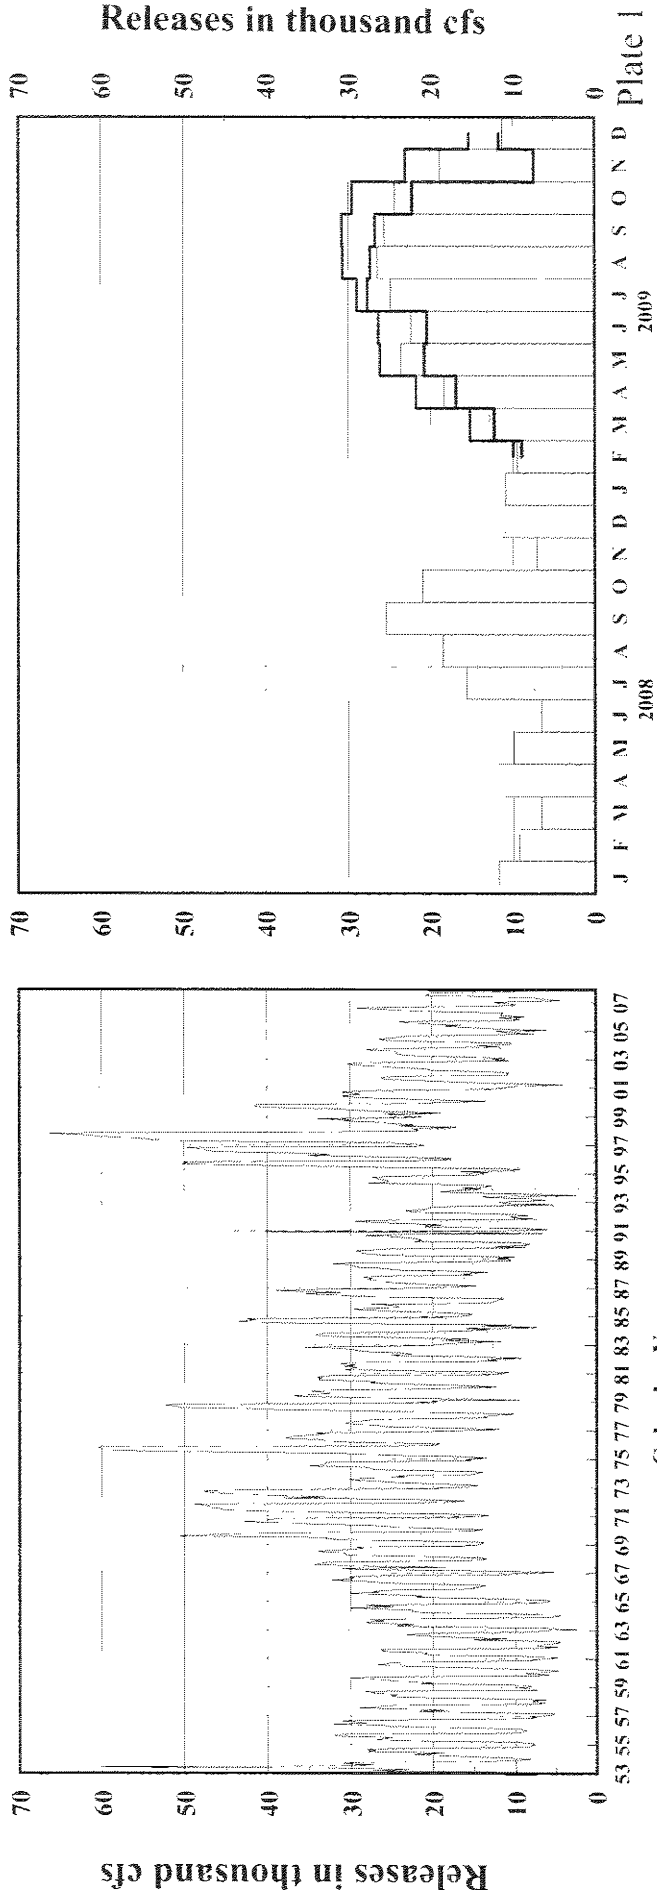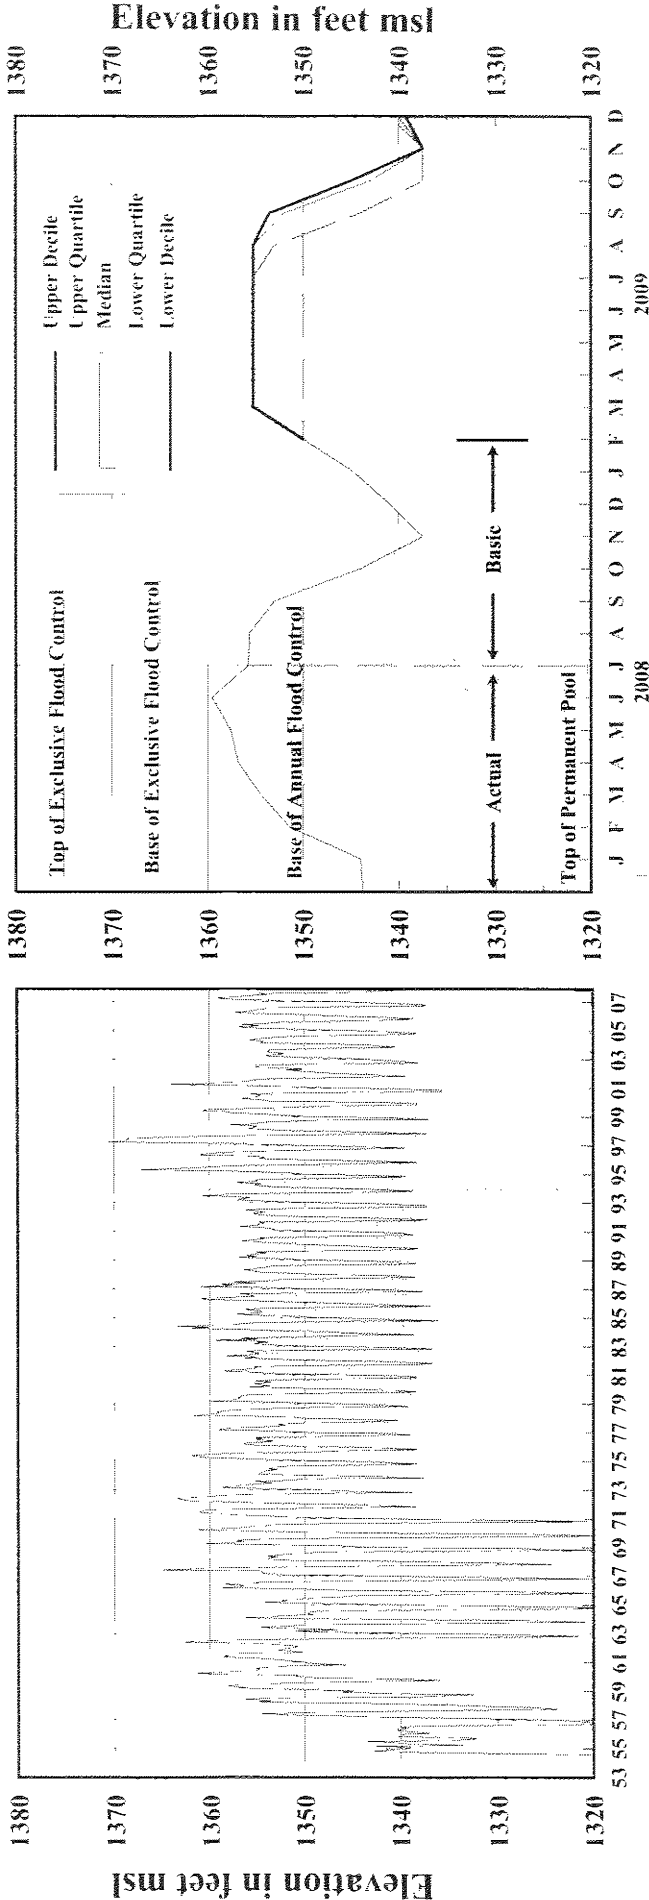


Reservoir Release and Unregulated Flow


Fort Peck

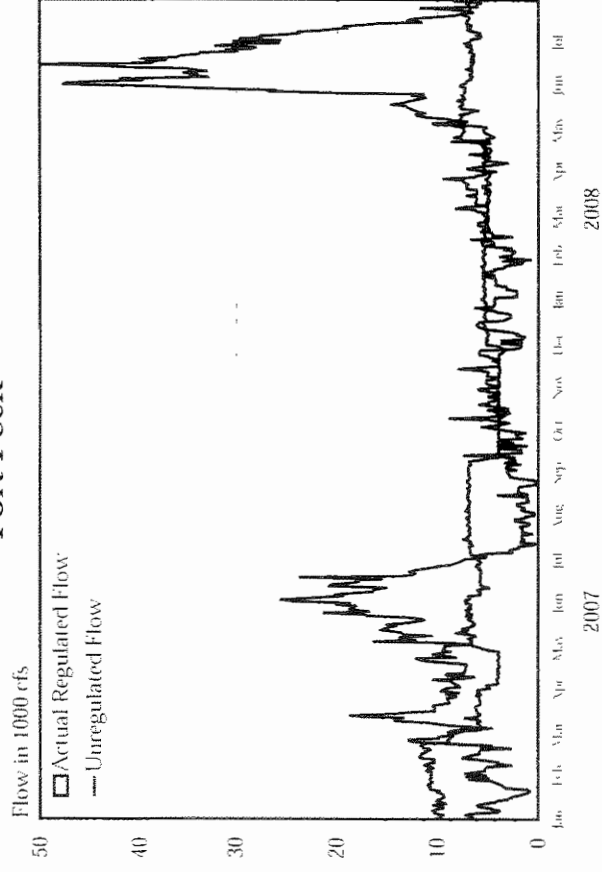


Garrison

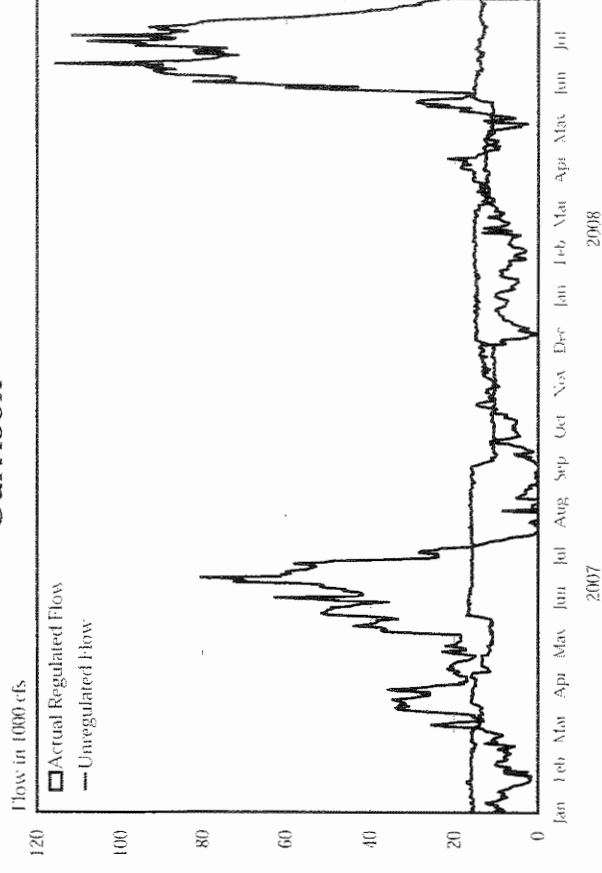



Oahe

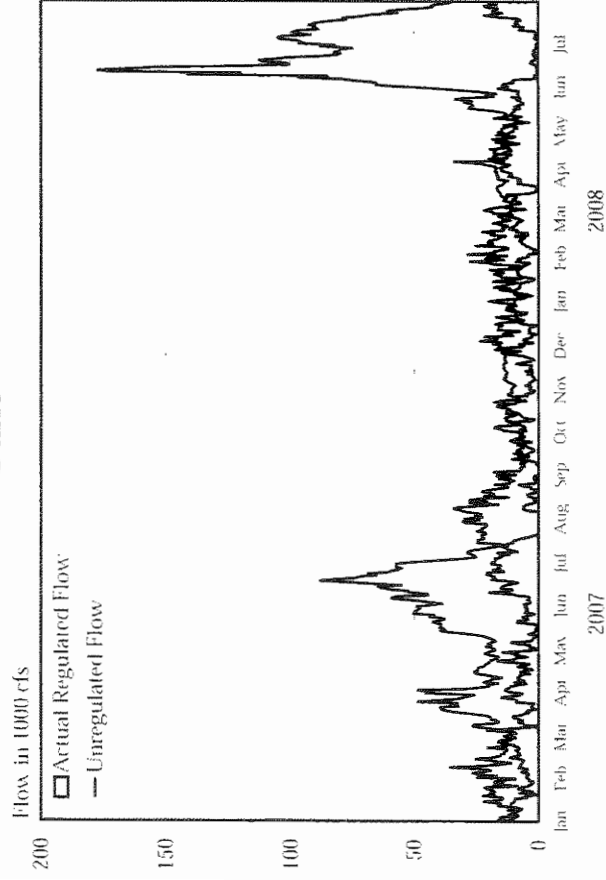

Gavins Point

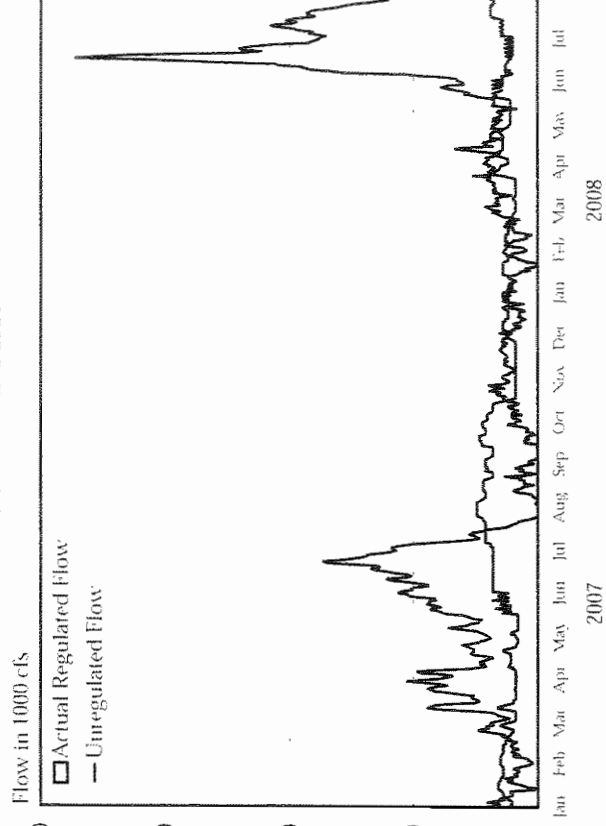

System Gross Capacity and Average Monthly Generation

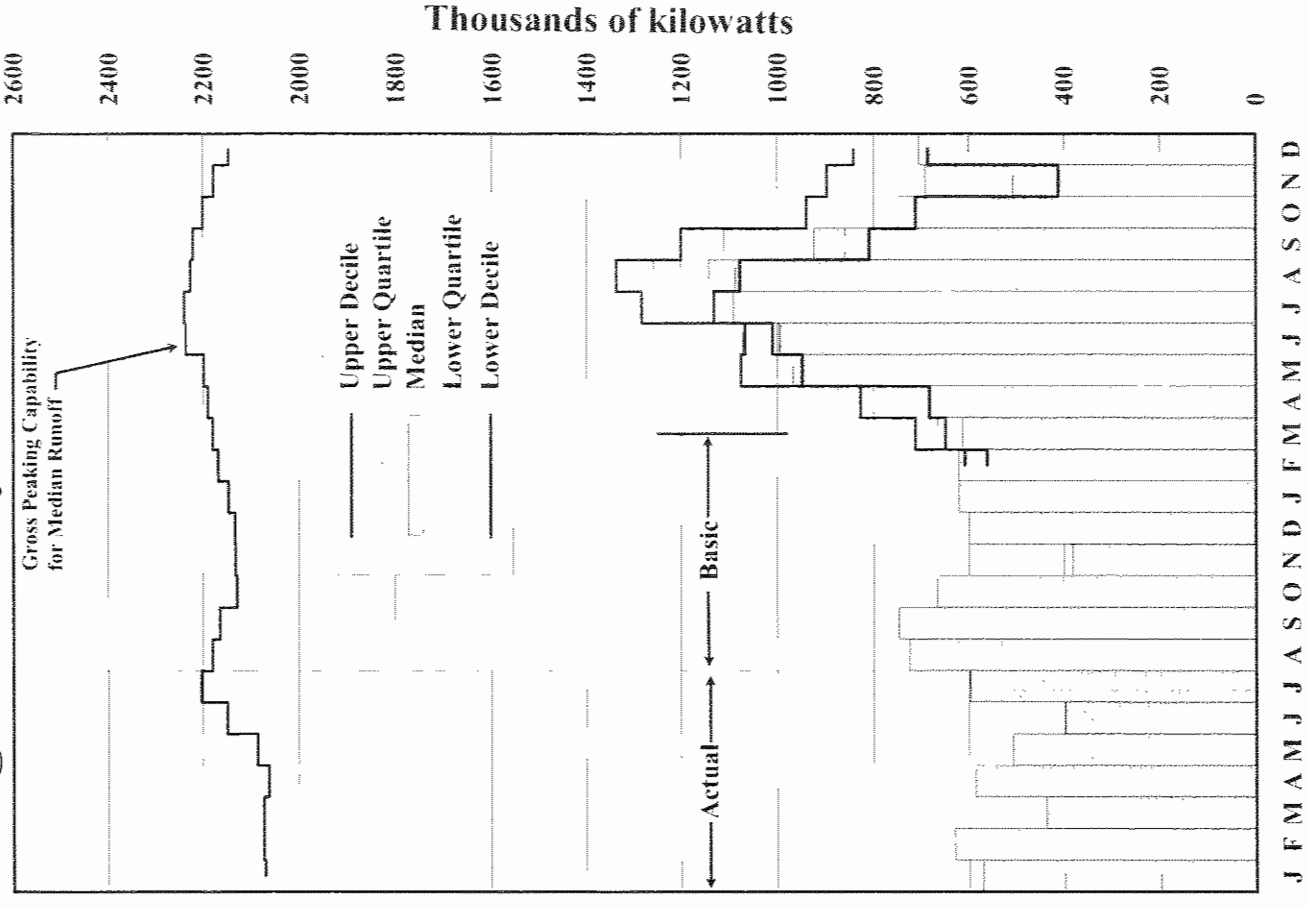
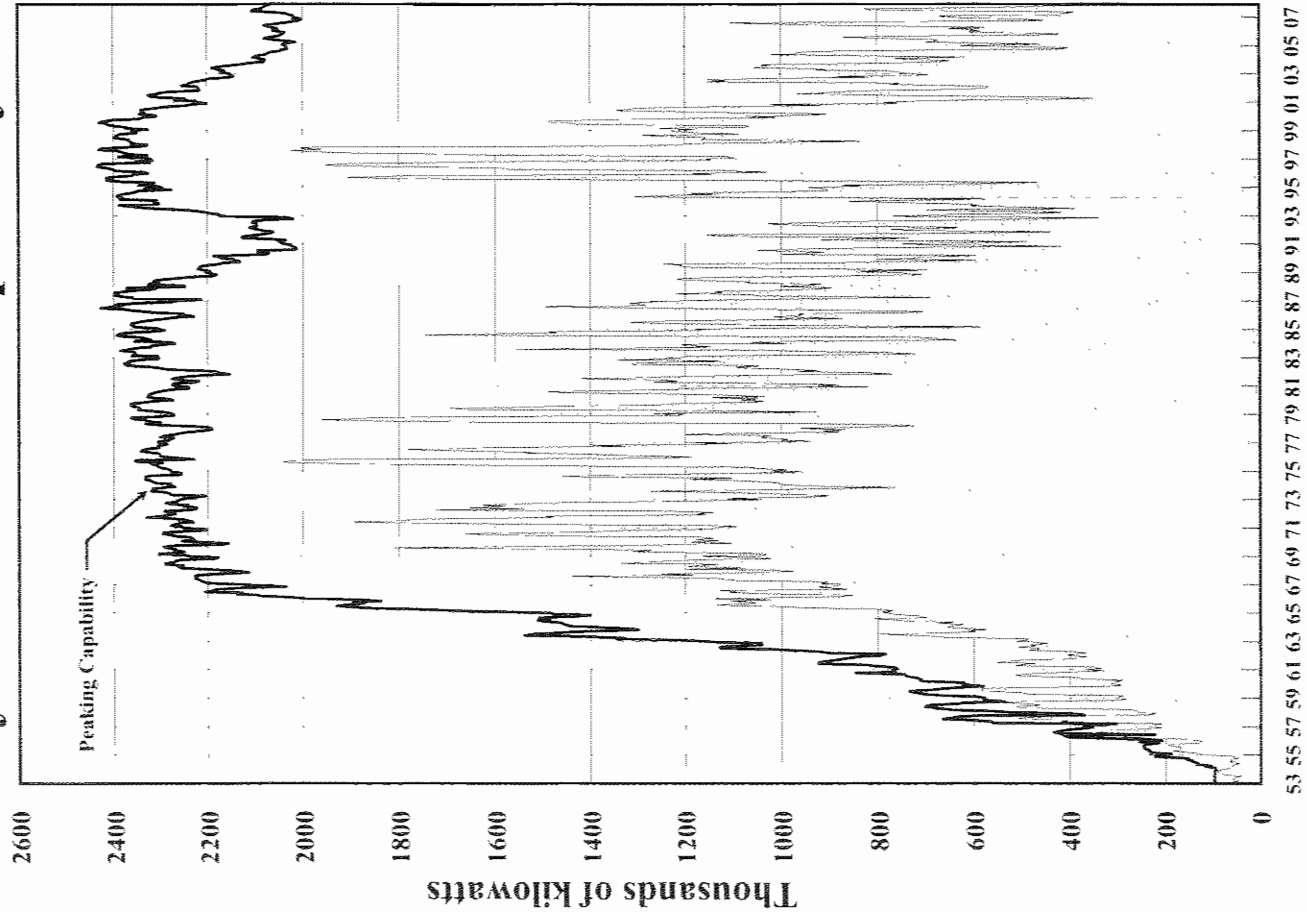


53 55 57 59 61 63 65 67 69 71 73 75 77 79 81 83 85 87 89 91 93 95 97 99 01 03 05 07

J F M A M J J A S O N D J F M A M J J A S O N D 2008 2009


This line graph displays the storage levels in million acre-feet for three different metrics: Median, Lower Quartile, and Lower Decile, over a 30-year period from 1960 to 1990. The Y-axis represents storage in million acre-feet, ranging from 18 to 68. The X-axis represents the year, with labels for 1960, 1970, 1980, and 1990. The Median storage (thick line) starts at approximately 52 million acre-feet in 1960, peaks at about 62 million in 1970, and then fluctuates between 50 and 55 million through 1990. The Lower Quartile (medium line) starts at about 42 million, peaks at 48 million in 1970, and ends at 45 million in 1990. The Lower Decile (thin line) starts at about 32 million, peaks at 38 million in 1970, and ends at 35 million in 1990.

Year	Median (million acre-feet)	Lower Quartile (million acre-feet)	Lower Decile (million acre-feet)
1960	52	42	32
1970	62	48	38
1980	52	42	32
1990	50	45	35

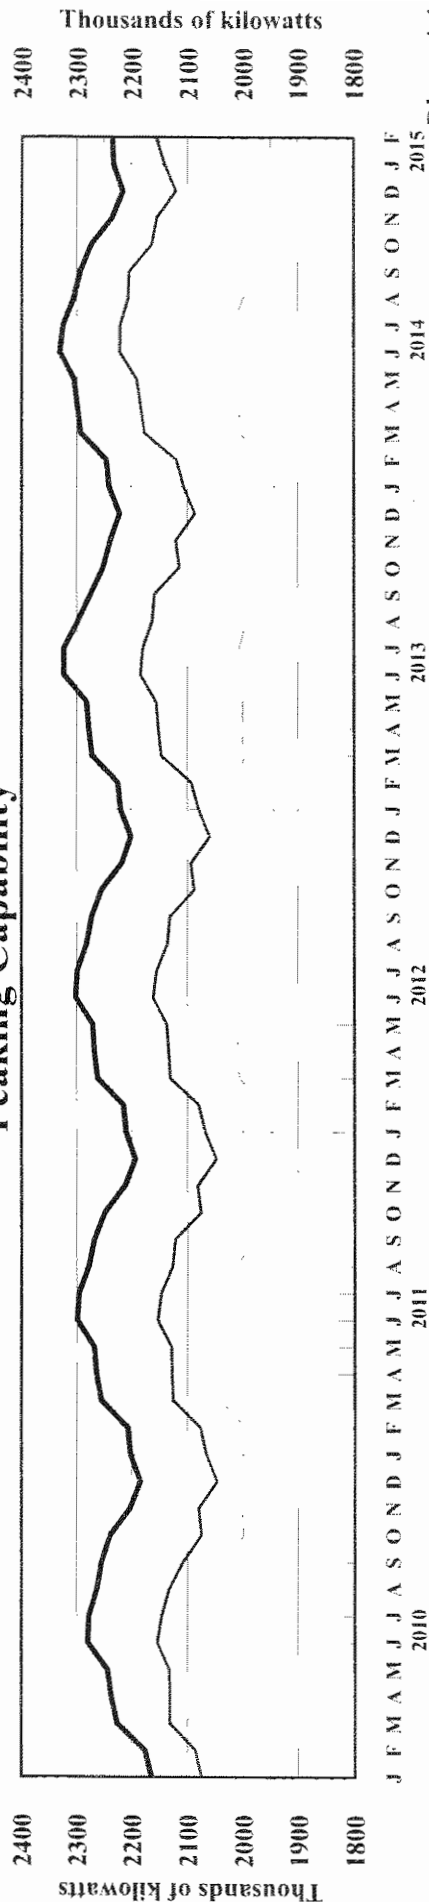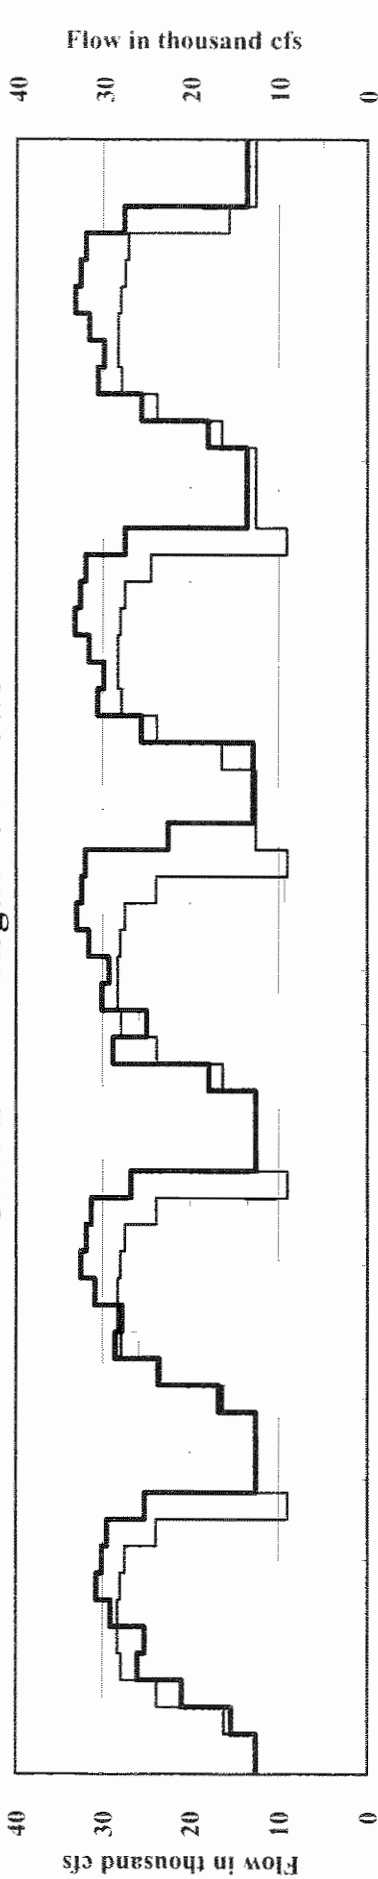


Tentative Five Year Extensions of 2008-2009 AOP


Fort Peck

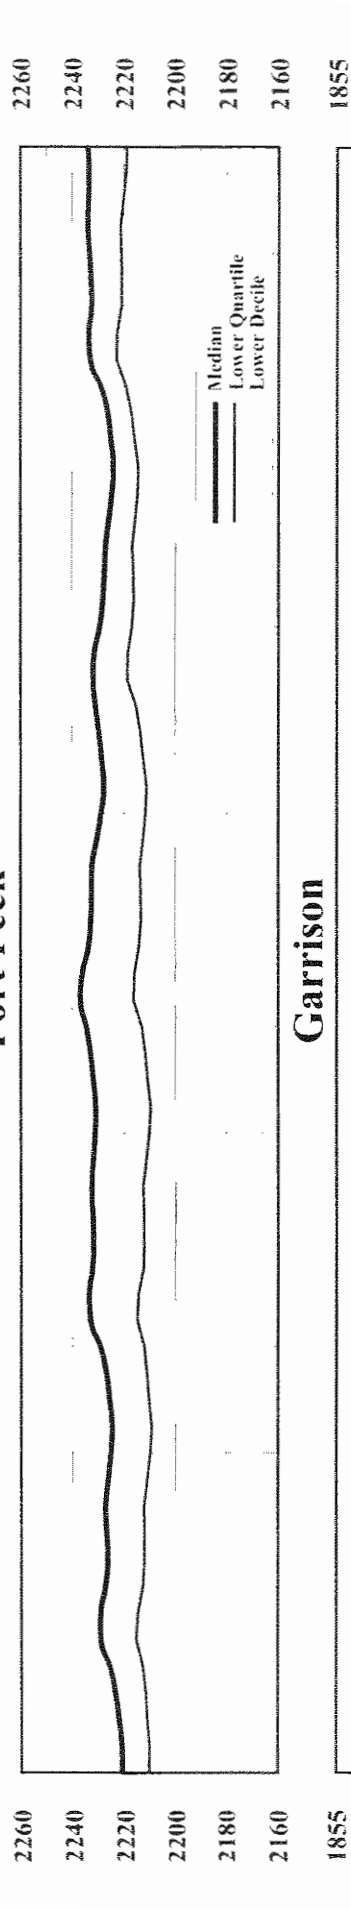


Garrison

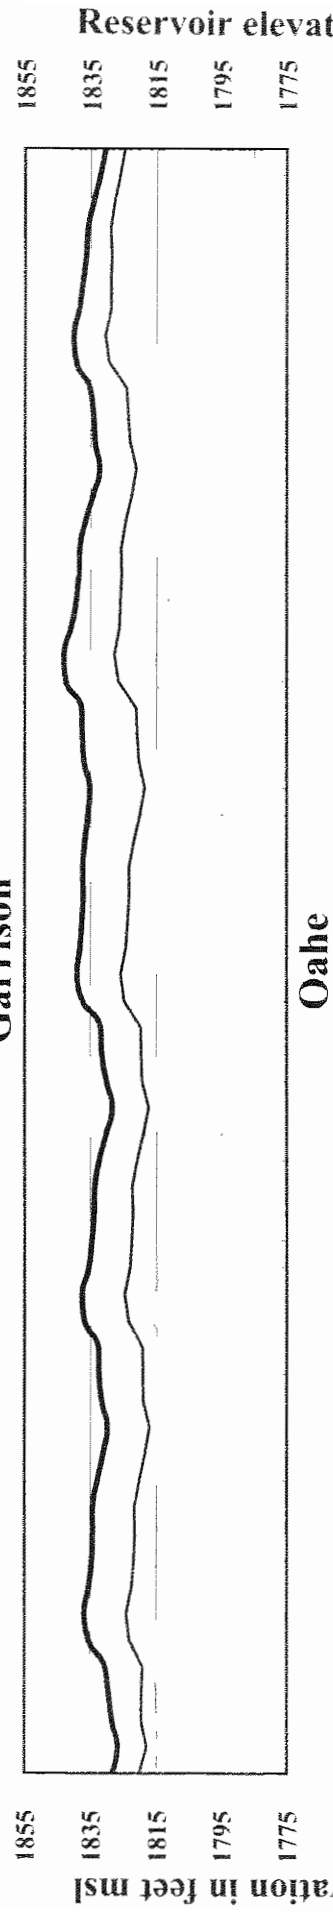

Oahe

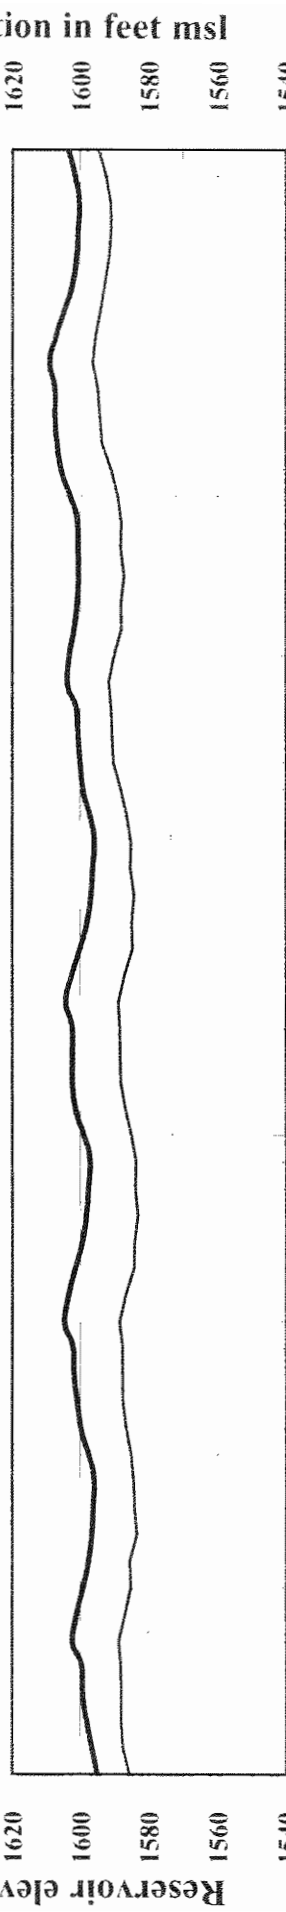


Fort Randall

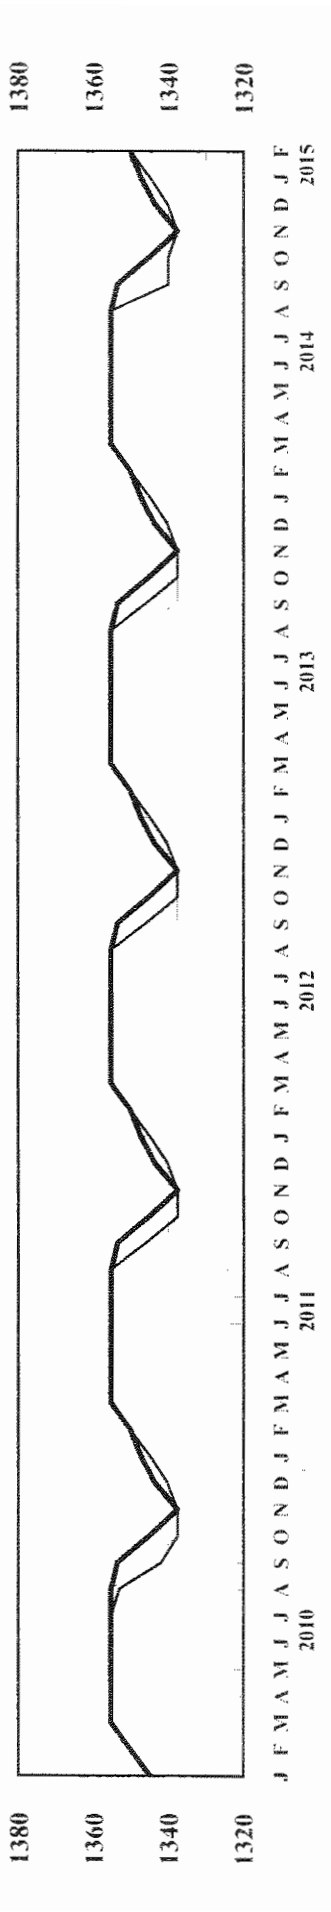

AMERICAN INDIAN RESERVATIONS

MISSOURI RIVER BASIN

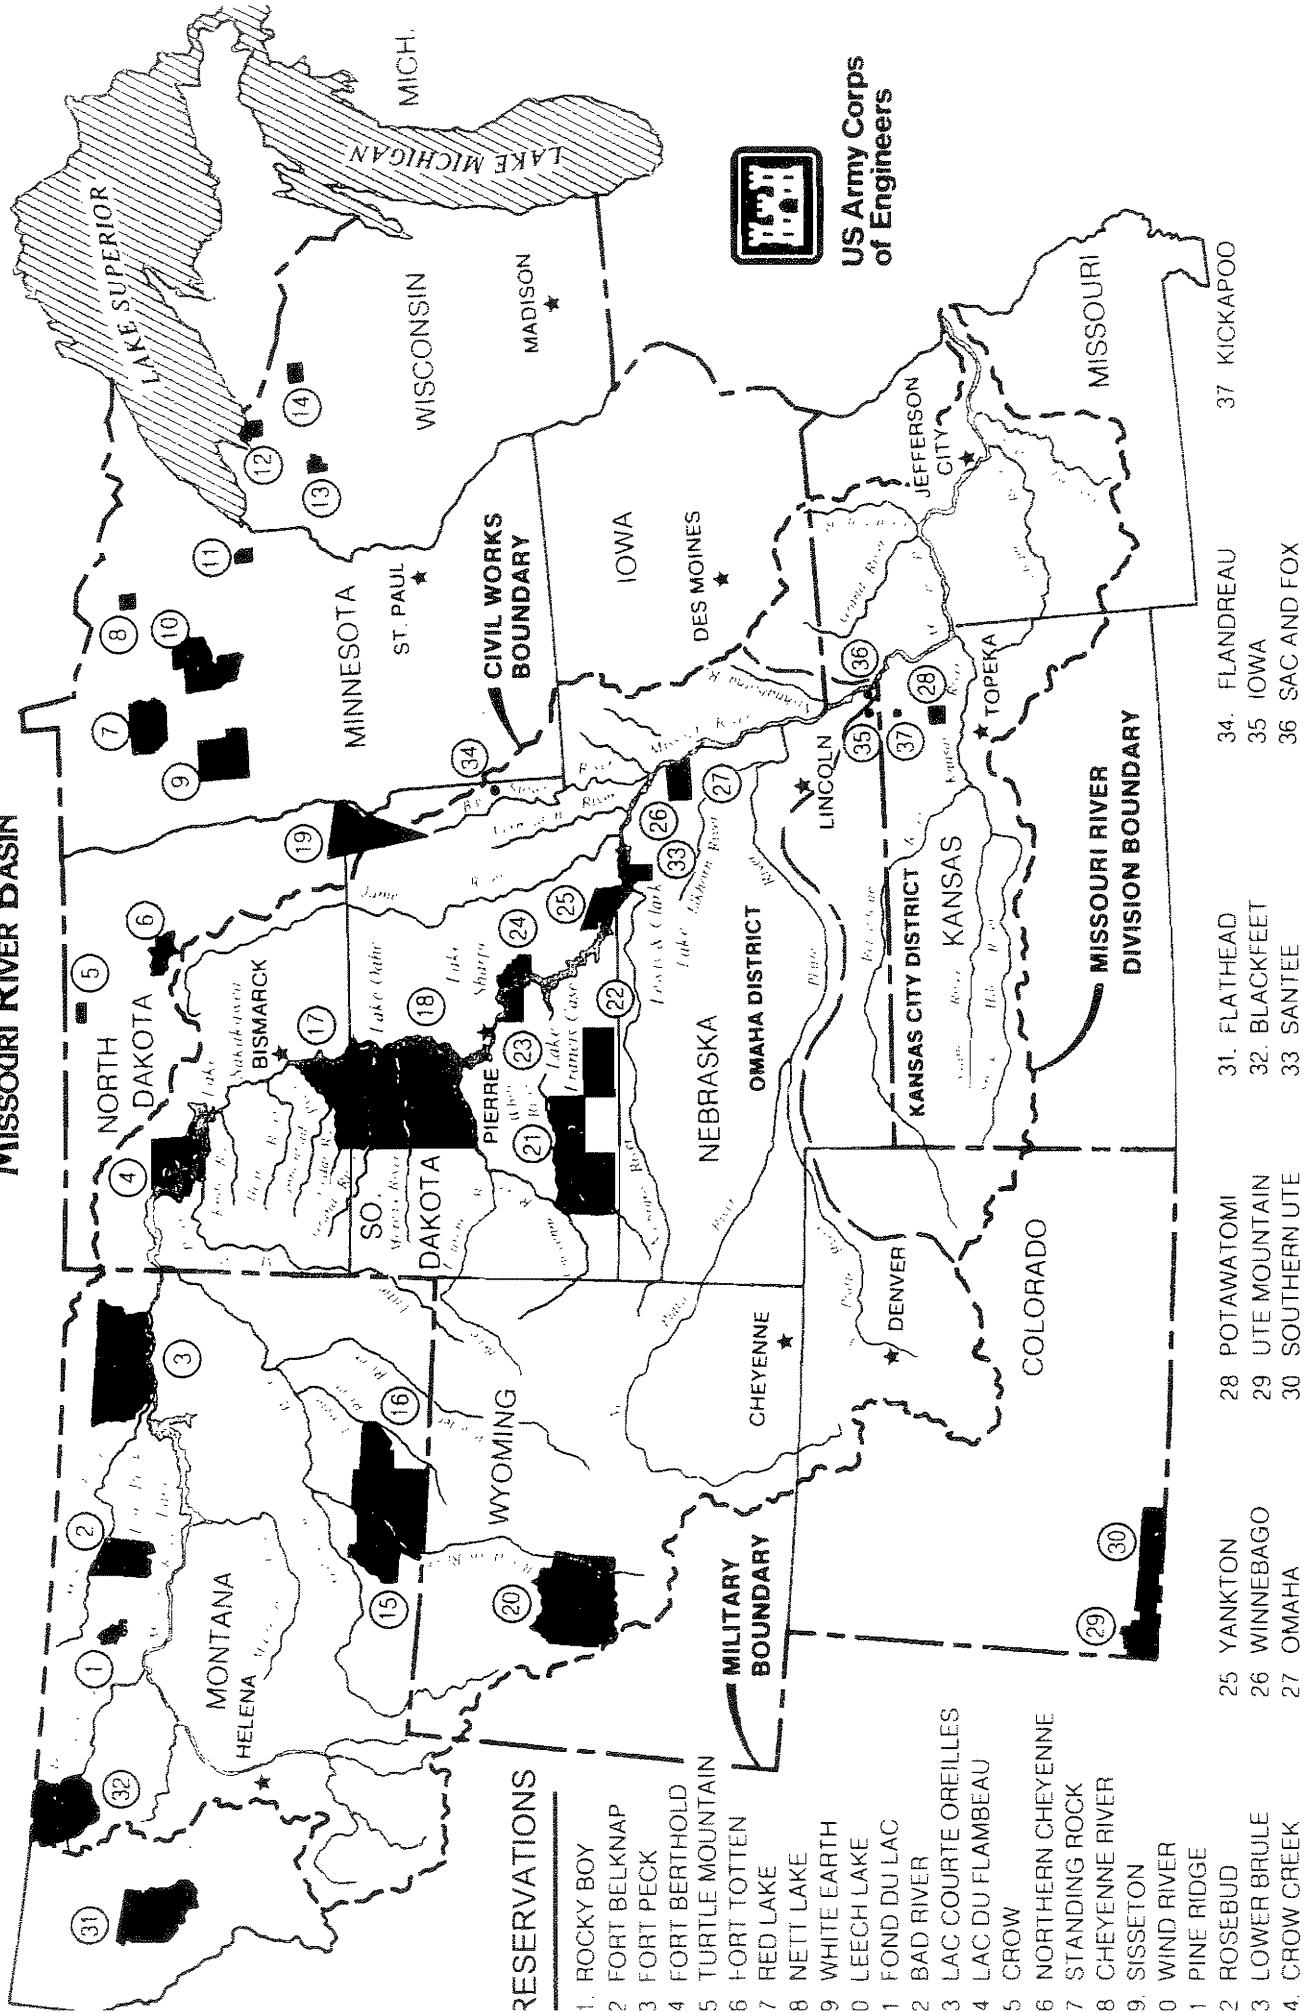

DATE OF STUDY 12/28/08

AUGUST 1, 2008 BASIC SIMULATION - 26.3 MAF

99001 9901

4 PAGE

1

TIME OF STUDY 08:57:33

SH NV SS 30 DAYS, Unbal FP -3.6 GR +1.8 OA +0.6
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO

1

	31JUL08	2008	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
	INI-SUM	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB
--FORT PECK--										
NAT INFLOW	2260	360	290	330	160	75	85	280	315	365
DEPLETION	-614	-1	-87	-57	-39	-18	-21	-131	-154	-107
EVAPORATION	329	67	84	73	33	16	18	39		
MOD INFLOW	2545	294	293	314	165	77	88	372	469	472
RELEASE	2313	430	327	246	119	56	63	369	369	333
STOR CHANGE	233	-136	-34	68	46	22	25	3	100	139
STORAGE	10568	10432	10398	10466	10512	10534	10558	10562	10662	10801
ELEV FTMSL	2210.0	2209.2	2209.0	2209.4	2209.7	2209.8	2210.0	2210.0	2210.6	2211.4
DISCH KCFS	6.8	7.0	5.5	4.0	4.0	4.0	4.0	6.0	6.0	6.0
POWER										
AVE POWER MW		86	68	49	50	50	50	74	74	75
PEAK POW MW		138	138	138	139	139	139	139	140	141
ENERGY GWH	346.4	64.3	48.8	36.8	17.8	8.3	9.5	55.3	55.4	50.2
--GARRISON--										
NAT INFLOW	2615	625	390	430	170	79	91	210	260	360
DEPLETION	-463	60	-135	-19	-96	-45	-51	-83	-63	-32
CHAN STOR	8	-2	16	16				-21		
EVAPORATION	405	82	103	90	41	19	22	47		
REG INFLOW	4994	912	765	620	344	160	183	594	692	725
RELEASE	5443	861	726	676	312	146	167	799	922	833
STOR CHANGE	-448	51	39	-56	31	15	17	-206	-230	-108
STORAGE	14677	14728	14766	14710	14741	14756	14772	14567	14337	14229
ELEV FTMSL	1825.4	1825.6	1825.8	1825.6	1825.7	1825.7	1825.8	1825.0	1824.2	1823.7
DISCH KCFS	13.6	14.0	12.2	11.0	10.5	10.5	10.5	13.0	15.0	15.0
POWER										
AVE POWER MW		162	141	127	122	122	122	150	172	171
PEAK POW MW		425	425	424	425	425	425	422	419	418
ENERGY GWH	758.5	120.2	101.6	94.7	43.7	20.4	23.4	111.6	127.9	115.0
--OAHE--										
NAT INFLOW	450	100	115	70	33	15	17		10	90
DEPLETION	192	103	26	-8	2	1		15	20	32
CHAN STOR	-7	-2	8	6	2			-12	-9	
EVAPORATION	388	79	100	86	39	18	21	45		
REG INFLOW	5306	777	724	674	306	142	162	728	903	891
RELEASE	5824	930	862	926	211	109	123	906	903	855
STOR CHANGE	-518	-153	-139	-252	96	33	39	-178	0	36
STORAGE	15006	14853	14714	14462	14558	14591	14630	14452	14452	14488
ELEV FTMSL	1594.0	1593.4	1592.8	1591.9	1592.2	1592.4	1592.5	1591.8	1591.8	1592.0
DISCH KCFS	9.8	15.1	14.5	15.1	7.1	7.8	7.7	14.7	14.7	15.4
POWER										
AVE POWER MW		181	173	179	84	93	92	175	174	183
PEAK POW MW		635	633	628	630	630	631	628	628	628
ENERGY GWH	840.0	134.9	124.8	133.4	30.4	15.7	17.7	130.4	129.8	122.8
--BIG BEND--										
EVAPORATION	97	20	25	22	10	5	5	11		
REG INFLOW	5727	910	838	904	201	104	117	895	903	855
RELEASE	5737	920	838	904	201	104	117	895	903	855
STORAGE	1631	1621	1621	1621	1621	1621	1621	1621	1621	1621
ELEV FTMSL	1420.2	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
DISCH KCFS	9.3	15.0	14.1	14.7	6.8	7.5	7.4	14.5	14.7	15.4
POWER										
AVE POWER MW		71	70	74	34	38	38	73	72	74
PEAK POW MW		518	538	538	538	538	538	538	538	529
ENERGY GWH	341.5	52.6	50.1	55.2	12.3	6.4	7.2	54.3	53.8	49.6
--FORT RANDALL--										
NAT INFLOW	180	40	40	10	5	2	3	10	20	50
DEPLETION	34	15	7	1	1	0	1	3	3	3
EVAPORATION	99	25	28	20	8	4	4	10		
REG INFLOW	5785	920	843	894	198	102	115	892	920	902
RELEASE	6245	1138	1516	1289	198	102	115	689	670	528
STOR CHANGE	-460	-218	-673	-395	0	0	0	203	250	374
STORAGE	3583	3365	2692	2296	2296	2296	2296	2499	2749	3123
ELEV FTMSL	1355.6	1353.0	1344.0	1337.5	1337.5	1337.5	1337.5	1341.0	1344.8	1350.0
DISCH KCFS	15.6	18.5	25.5	21.0	6.6	7.4	7.3	11.2	10.9	9.5
POWER										
AVE POWER MW		156	203	157	49	54	53	83	84	76
PEAK POW MW		349	314	285	285	285	285	301	319	339
ENERGY GWH	590.9	115.9	146.4	116.5	17.6	9.1	10.2	61.9	62.3	51.0
--GAVINS POINT--										
NAT INFLOW	790	115	110	120	60	28	32	100	100	125
DEPLETION	27	10	-5	1	5	2	3	10	1	
CHAN STOR	11	-6	-13	8	27	-1	0	-7	1	3
EVAPORATION	36	7	9	8	4	2	2	4		
REG INFLOW	6983	1231	1609	1408	276	125	143	767	770	655
RELEASE	6995	1230	1583	1408	276	125	143	767	770	694
STOR CHANGE	-12	1	26							-39
STORAGE	370	371	397	397	397	397	397	397	397	358
ELEV FTMSL	1206.5	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0
DISCH KCFS	16.3	20.0	26.6	22.9	9.3	9.0	9.0	12.5	12.5	12.5
POWER										
AVE POWER MW		70	92	81	33	32	32	44	44	44
PEAK POW MW		115	117	117	117	117	117	117	117	114
ENERGY GWH	297.4	51.8	66.6	59.9	11.9	5.4	6.2	33.0	33.1	29.6
--GAVINS POINT - SIOUX CITY--										
NAT INFLOW	560	150	95	75	38	18	20	45	35	85
DEPLETION	118	35	23	10	6	3	3	12	13	14
REGULATED FLOW AT SIOUX CITY										
KAF	7437	1345	1655	1473	308	140	160	800	792	765
KCFS		21.9	27.8	24.0	10.3	10.1	10.1	13.0	12.9	13.8
--TOTAL--										
NAT INFLOW	6855	1390	1040	1035	465	217	248	645	740	1075
DEPLETION	-706	222	-171	-72	-121	-56	-64	-174	-180	-90
CHAN STOR	14	-9	11	30	30	-1	0	-40	-9	3
EVAPORATION	1353	279	348	300	135	63	72	156		
STORAGE	45835	45370	44589	43952	44125	44194	44275	44098	44217	44620
SYSTEM POWER										
AVE POWER MW		725	748	667	372	389	387	600	621	622
PEAK POW MW		2181	2165	2130	2133	2134	2135	2145	2160	2169
ENERGY GWH	3174.7	539.7	538.3	496.5	133.8	55.3	74.2	446.4	462.1	418.3
DAILY GWH		17.4	17.9	16.0	6.9	9.3	9.3	14.4	14.9	14.9
INI-SUM		31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB

DATE OF STUDY 12/28/08

AUGUST 1,2008 - UPPER BASIC SIMULATION-27.4 MAF 99001 9901 9901 PAGE 1

TIME OF STUDY 09:35:17

SH NV SS 30 DAYS, FP -2.8 GR +2.0 OA -0.2
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 2

31JUL08	2008										2009
INI-SUM	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		
--FORT PECK--											
NAT INFLOW	2712	432	348	396	192	90	102	336	378	438	
DEPLETION	-688	-5	-112	-56	-39	-18	-21	-153	-172	-112	
EVAPORATION	225	50	63	56	13	6	7	30			
MOD INFLOW	3175	387	397	396	218	102	116	459	550	550	
RELEASE	2313	430	327	246	119	56	63	369	369	333	
STOR CHANGE	862	-44	69	150	99	46	53	91	181	217	
STORAGE	10568	10524	10594	10744	10843	10889	10942	11032	11213	11430	
ELEV FTMSL	2210.0	2209.7	2210.2	2211.1	2211.7	2211.9	2212.3	2212.8	2213.9	2215.1	
DISCH KCFS	6.8	7.0	5.5	4.0	4.0	4.0	4.0	6.0	6.0	6.0	
POWER											
AVE POWER MW		87	68	50	50	50	50	75	76	76	
PEAK POW MW		139	139	140	141	142	142	142	144	145	
ENERGY GWH	349.7	64.4	49.0	37.0	18.0	8.4	9.6	56.0	56.2	51.0	
--GARRISON--											
NAT INFLOW	3138	750	468	516	204	95	109	252	312	432	
DEPLETION	-486	66	-125		-103	-48	-55	-100	-82	-39	
CHAN STOR	8	-2	16	16				-21			
EVAPORATION	279	62	79	69	16	8	9	36			
REG INFLOW	5666	1051	857	709	410	191	218	664	763	804	
RELEASE	5443	861	726	676	312	146	167	799	922	833	
STOR CHANGE	224	190	131	32	97	45	52	-136	-159	-29	
STORAGE	14677	14867	14998	15030	15127	15173	15224	15089	14929	14901	
ELEV FTMSL	1825.4	1826.2	1826.7	1826.8	1827.1	1827.3	1827.5	1827.0	1826.4	1826.3	
DISCH KCFS	13.6	14.0	12.2	11.0	10.5	10.5	10.5	13.0	15.0	15.0	
POWER											
AVE POWER MW		162	142	128	123	123	123	152	174	174	
PEAK POW MW		427	428	429	430	431	431	430	427	427	
ENERGY GWH	765.7	120.4	102.1	95.4	44.1	20.6	23.6	112.9	129.7	116.9	
--OAHE--											
NAT INFLOW	540	120	138	84	39	18	21		12	108	
DEPLETION	192	103	26	-8	2	1	1	15	20	32	
CHAN STOR	-6	-2	8	6	2			-11	-9		
EVAPORATION	267	60	75	66	16	7	8	35			
REG INFLOW	5517	816	771	708	336	156	178	738	905	909	
RELEASE	5559	885	875	830	185	97	109	1043	888	647	
STOR CHANGE	-41	-69	-105	-122	151	59	69	-305	17	262	
STORAGE	15006	14937	14832	14710	14862	14921	14990	14685	14702	14965	
ELEV FTMSL	1594.0	1593.7	1593.3	1592.8	1593.4	1593.7	1593.9	1592.7	1592.8	1593.8	
DISCH KCFS	9.8	14.4	14.7	13.5	6.2	7.0	6.9	17.0	14.4	11.6	
POWER											
AVE POWER MW		173	176	161	75	84	83	203	172	140	
PEAK POW MW		637	635	633	636	637	638	632	632	638	
ENERGY GWH	805.6	128.6	127.0	120.2	26.8	14.1	15.9	151.1	128.2	93.8	
--BIG BEND--											
EVAPORATION	66	15	19	16	4	2	2	9			
REG INFLOW	5493	870	857	814	181	95	107	1035	888	647	
RELEASE	5503	880	857	814	181	95	107	1035	888	647	
STORAGE	1631	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.2	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	9.3	14.3	14.4	13.2	6.1	6.8	6.7	16.8	14.4	11.6	
POWER											
AVE POWER MW		68	71	67	31	35	34	83	70	56	
PEAK POW MW		518	538	538	538	538	538	538	538	529	
ENERGY GWH	326.4	50.3	51.0	49.7	11.1	5.8	6.6	61.9	52.4	37.6	
--FORT RANDALL--											
NAT INFLOW	216	48	48	12	6	3	3	12	24	60	
DEPLETION	34	15	7	1	1	0	1	3	3	3	
EVAPORATION	69	19	21	15	3	1	2	8			
REG INFLOW	5617	895	877	810	183	96	108	1036	909	704	
RELEASE	6076	1113	1492	1263	183	96	108	670	652	500	
STOR CHANGE	-460	-218	-615	-453	0	0	0	366	257	204	
STORAGE	3583	3365	2750	2297	2297	2296	2296	2662	2919	3123	
ELEV FTMSL	1355.6	1353.0	1344.8	1337.5	1337.5	1337.5	1337.5	1343.5	1347.2	1350.0	
DISCH KCFS	15.6	18.1	25.1	20.5	6.2	6.9	6.8	10.9	10.6	9.0	
POWER											
AVE POWER MW		152	201	154	45	51	50	82	83	73	
PEAK POW MW		349	318	285	285	285	285	313	330	339	
ENERGY GWH	578.7	113.3	144.6	114.6	16.3	8.5	9.6	60.9	61.9	48.9	
--GAVINS POINT--											
NAT INFLOW	948	138	132	144	72	34	38	120	120	150	
DEPLETION	27	10	-5	1	5	2	3	10	1		
CHAN STOR	12	-5	-13	8	27	-1	0	-8	1	3	
EVAPORATION	24	5	7	6	1	1	1	3			
REG INFLOW	6985	1231	1609	1408	276	125	143	769	771	653	
RELEASE	6997	1230	1583	1408	276	125	143	769	771	692	
STOR CHANGE	-12	1	26							-39	
STORAGE	370	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.5	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	16.3	20.0	26.6	22.9	9.3	9.0	9.0	12.5	12.5	12.5	
POWER											
AVE POWER MW		70	92	81	33	32	32	44	45	44	
PEAK POW MW		115	117	117	117	117	117	117	117	114	
ENERGY GWH	297.5	51.8	66.6	59.9	11.9	5.4	6.2	33.1	33.2	29.5	
--GAVINS POINT - SIOUX CITY--											
NAT INFLOW	672	180	114	90	45	21	24	54	42	102	
DEPLETION	118	35	23	10	6	3	3	12	13	14	
REGULATED FLOW AT SIOUX CITY											
KAF	7551	1375	1674	1488	315	143	164	811	800	780	
KCFS		22.4	28.1	24.2	10.6	10.3	10.3	13.2	13.0	14.0	
--TOTAL--											
NAT INFLOW	8226	1668	1248	1242	558	260	298	774	888	1290	
DEPLETION	-803	224	-186	-52	-129	-60	-69	-213	-217	-102	
CHAN STOR	14	-9	11	29	30	-1	0	-40	-9	3	
EVAPORATION	930	210	254	228	54	25	29	120			
STORAGE	45835	45685	45192	44800	45147	45297	45471	45486	45782	46398	
SYSTEM POWER											
AVE POWER MW		711	750	641	356	374	372	640	620	562	
PEAK POW MW		2185	2176	2141	2147	2149	2151	2172	2188	2192	
ENERGY GWH	3123.6	528.9	540.3	476.8	128.3	62.8	71.4	475.9	461.5	377.7	
DAILY GWH		17.1	18.0	15.4	8.6	9.0	8.9	15.4	14.9	13.5	
INI-SUM	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		

TIME OF STUDY 09:14:30

SH NV SS 30 DAYS, Unbal FP -3.7 GR +2.2 OA +0.2
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 3

31JUL08	2008										
INI-SUM	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		
--FORT PECK--											
NAT INFLOW	1808	288	232	264	128	60	68	224	252	292	
DEPLETION	-552	-44	-110	-91	-28	-13	-15	-91	-94	-65	
EVAPORATION	408	83	104	91	41	19	22	47			
MOD INFLOW	1952	249	238	264	115	54	61	268	346	358	
RELEASE	2224	430	327	246	119	56	63	338	338	305	
STOR CHANGE	-271	-181	-89	18	-4	-2	-2	-71	8	53	
STORAGE	10568	10387	10297	10316	10311	10309	10307	10237	10244	10297	
ELEV FTMSL	2210.0	2208.9	2208.4	2208.5	2208.4	2208.4	2208.4	2208.0	2208.0	2208.4	
DISCH KCFS	6.8	7.0	5.5	4.0	4.0	4.0	4.0	5.5	5.5	5.5	
POWER											
AVE POWER MW		86	68	49	49	49	49	68	67	68	
PEAK POW MW		138	137	137	137	137	137	137	137	137	
ENERGY GWH	330.9	64.3	48.7	36.6	17.7	8.3	9.5	50.2	50.2	45.4	
--GARRISON--											
NAT INFLOW	2092	500	312	344	136	63	73	168	208	288	
DEPLETION	-425	47	-130	1	-92	-43	-49	-72	-53	-35	
CHAN STOR	14	-2	16	16				-16		0	
EVAPORATION	503	103	129	112	50	24	27	58			
REG INFLOW	4251	779	656	492	296	138	158	504	599	628	
RELEASE	5236	861	726	676	312	146	167	769	830	750	
STOR CHANGE	-985	-82	-70	-184	-16	-8	-9	-264	-231	-121	
STORAGE	14677	14595	14525	14341	14325	14317	14308	14044	13813	13692	
ELEV FTMSL	1825.4	1825.1	1824.9	1824.2	1824.1	1824.1	1824.1	1823.0	1822.1	1821.7	
DISCH KCFS	13.6	14.0	12.2	11.0	10.5	10.5	10.5	12.5	13.5	13.5	
POWER											
AVE POWER MW		161	140	126	120	120	120	142	153	152	
PEAK POW MW		423	422	419	419	419	419	415	412	410	
ENERGY GWH	723.5	120.0	101.1	94.0	43.3	20.2	23.1	106.0	113.6	102.2	
--OAHE--											
NAT INFLOW	360	80	92	56	26	12	14		8	72	
DEPLETION	192	103	26	-8	2	1	1	15	20	32	
CHAN STOR	0	-2	8	6	2			-9	-5		
EVAPORATION	483	100	124	107	48	23	26	56			
REG INFLOW	4922	736	676	639	291	134	154	689	813	790	
RELEASE	6135	974	963	963	229	117	132	888	976	892	
STOR CHANGE	-1213	-238	-287	-324	61	17	21	-199	-162	-103	
STORAGE	15006	14768	14481	14157	14219	14236	14257	14058	13896	13793	
ELEV FTMSL	1594.0	1593.1	1591.9	1590.6	1590.9	1590.9	1591.0	1590.2	1589.6	1589.1	
DISCH KCFS	9.8	15.8	16.2	15.7	7.7	8.4	8.3	14.4	15.9	16.1	
POWER											
AVE POWER MW		190	193	185	91	100	99	170	186	188	
PEAK POW MW		634	628	622	623	623	624	620	616	614	
ENERGY GWH	878.1	141.3	138.8	137.8	32.8	16.8	19.0	126.7	138.6	126.4	
--BIG BEND--											
EVAPORATION	121	25	31	27	12	6	7	14			
REG INFLOW	6013	950	932	936	217	112	126	874	976	892	
RELEASE	6023	960	932	936	217	112	126	873	976	892	
STORAGE	1631	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.2	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	9.3	15.6	15.7	15.2	7.3	8.0	7.9	14.2	15.9	16.1	
POWER											
AVE POWER MW		74	77	77	37	41	40	72	78	77	
PEAK POW MW		518	538	538	538	538	538	538	538	529	
ENERGY GWH	358.6	54.8	55.7	57.1	13.3	6.8	7.7	53.3	58.1	51.8	
--FORT RANDALL--											
NAT INFLOW	144	32	32	8	4	2	2	8	16	40	
DEPLETION	34	15	7	1	1	0	1	3	3	3	
EVAPORATION	123	31	35	25	10	5	5	12			
REG INFLOW	6011	946	922	918	211	108	122	866	989	929	
RELEASE	6471	1164	1596	1313	211	108	122	713	689	555	
STOR CHANGE	-460	-218	-673	-395	0	0	0	153	300	374	
STORAGE	3583	3365	2692	2296	2296	2296	2296	2449	2749	3123	
ELEV FTMSL	1355.6	1353.0	1344.0	1337.5	1337.5	1337.5	1337.5	1340.1	1344.8	1350.0	
DISCH KCFS	15.6	18.9	26.8	21.4	7.1	7.8	7.7	11.6	11.2	10.0	
POWER											
AVE POWER MW		159	214	160	52	57	56	86	86	80	
PEAK POW MW		349	314	285	285	285	285	297	319	339	
ENERGY GWH	611.5	118.5	153.9	118.7	18.7	9.6	10.8	63.8	63.7	53.7	
--GAVINS POINT--											
NAT INFLOW	632	92	88	96	48	22	26	80	80	100	
DEPLETION	27	10	-5	1	5	2	3	10	1		
CHAN STOR	10	-6	-15	10	26	-1	0	-7	1	2	
EVAPORATION	45	9	11	10	5	2	2	5			
REG INFLOW	7041	1231	1662	1408	276	125	143	771	768	658	
RELEASE	7053	1230	1636	1408	276	125	143	771	768	697	
STOR CHANGE	-12	1	26							-39	
STORAGE	370	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.5	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	16.3	20.0	27.5	22.9	9.3	9.0	9.0	12.5	12.5	12.5	
POWER											
AVE POWER MW		70	95	81	33	32	32	45	44	44	
PEAK POW MW		115	117	117	117	117	117	117	117	114	
ENERGY GWH	299.8	51.8	68.7	59.9	11.9	5.4	6.2	33.1	33.0	29.7	
--GAVINS POINT - SIOUX CITY--											
NAT INFLOW	448	120	75	60	30	14	16	36	28	68	
DEPLETION	118	35	23	10	6	3	3	12	13	14	
REGULATED FLOW AT SIOUX CITY											
KAF	7383	1315	1689	1458	300	136	156	795	783	751	
KCFS		21.4	28.4	23.7	10.1	9.8	9.8	12.9	12.7	13.5	
--TOTAL--											
NAT INFLOW	5484	1112	832	828	372	174	198	516	592	860	
DEPLETION	-606	166	-189	-86	-106	-49	-57	-123	-110	-52	
CHAN STOR	24	-10	9	31	30	-1	0	-32	-4	2	
EVAPORATION	1682	349	434	372	167	78	89	193			
STORAGE	45835	45107	44013	43128	43169	43176	43187	42805	42720	42884	
SYSTEM POWER											
AVE POWER MW		740	788	678	383	400	397	582	615	609	
PEAK POW MW		2177	2156	2118	2119	2119	2120	2124	2139	2144	
ENERGY GWH	3202.5	550.6	567.0	504.1	137.8	67.1	76.3	433.2	457.3	409.2	
DAILY GWH		17.8	18.9	16.3	9.2	9.6	9.5	14.0	14.8	14.6	
INI-SUM	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		

1

5

DEPLETION	2427	121	33	6	114	619	1468	1029	246	-190	-64	-143	267	-75	-210	56	-114
CHAN STOR	-50	10	-6	-19	4	-87	-8	-5	-3	63	16	1	14	-2	-42	-14	3
EVAPORATION	1529							94	296	370	320	143	66	76	164		
STORAGE	44620	45467	45803	46060	46914	47664	50726	51080	50025	49311	48551	48280	48259	48217	47948	47971	48328
SYSTEM POWER																	
AVE POWER MW		514	604	721	684	1001	993	1090	1141	925	750	717	648	707	705	748	740
PEAK POW MW		2177	2177	2180	2190	2199	2237	2240	2227	2222	2201	2178	2176	2275	2247	2264	2276
ENERGY GWH	7358.8	184.9	101.5	155.8	492.4	744.5	714.8	811.3	848.8	665.7	558.2	258.1	108.9	135.7	524.2	556.4	497.5
DAILY GWH		12.3	14.5	17.3	16.4	24.0	23.8	26.2	27.4	22.2	18.0	17.2	15.6	17.0	16.9	17.9	17.8

TIME OF STUDY 09:14:30

SHTN NAV SEAS 30 DAYS, SP MAR 5 MAY 9.8
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 7

28FEB09		VALUES IN 1000 AF EXCEPT AS INDICATED												2010				
INI-SUM		15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	6000	203	95	122	485	955	1480	665	285	255	340	165	77	88	260	220	305	
DEPLETION	349	-22	-10	-13	43	217	441	213	-7	-99	-75	-31	-14	-16	-100	-105	-72	
EVAPORATION	447							27	86	107	94	42	20	23	49			
MOD INFLOW	5204	226	105	135	442	738	1039	425	206	247	321	153	71	82	311	325	377	
RELEASE	4861	149	69	89	446	461	446	461	461	333	307	149	69	79	461	461	417	
STOR CHANGE	343	77	36	46	-4	277	593	-36	-255	-86	14	4	2	2	-150	-136	-40	
STORAGE	10297	10374	10410	10456	10451	10728	11321	11284	11030	10943	10957	10962	10964	10966	10816	10680	10640	
ELEV FTMSL	2208.4	2208.8	2209.0	2209.3	2209.3	2211.0	2214.5	2214.3	2212.8	2212.3	2212.3	2212.4	2212.4	2212.4	2211.5	2210.7	2210.4	
DISCH KCFS	5.5	5.0	5.0	5.0	7.5	7.5	7.5	7.5	7.5	5.6	5.0	5.0	5.0	5.0	7.5	7.5	7.5	
POWER																		
AVE POWER MW		62	62	62	92	93	94	95	94	70	63	63	63	63	94	93	93	
PEAK POW MW		138	138	138	138	140	144	144	142	142	142	142	142	142	141	140	140	
ENERGY GWH	733.7	22.2	10.4	13.3	66.5	69.0	67.7	70.5	70.2	50.6	46.6	22.6	10.5	12.0	69.7	69.4	62.5	
--GARRISON--																		
NAT INFLOW	9200	423	198	254	705	1110	2635	1585	505	390	420	165	77	88	150	220	275	
DEPLETION	1013	13	6	8	76	156	666	505	89	-122	1	-93	-43	-50	-93	-65	-41	
CHAN STOR	-21	5			-26					20	6			0	-26			
EVAPORATION	543							34	106	130	113	51	24	27	58			
REG INFLOW	12484	565	261	335	1049	1415	2415	1507	772	735	620	356	166	190	620	746	733	
RELEASE	13375	327	153	196	982	1230	1369	1414	1414	1100	676	327	153	175	1168	1414	1277	
STOR CHANGE	-892	237	108	139	67	185	1047	93	-643	-365	-56	29	13	15	-549	-668	-545	
STORAGE	13692	13929	14037	14176	14243	14429	15475	15569	14926	14561	14505	14533	14547	14562	14013	13345	12800	
ELEV FTMSL	1821.7	1822.6	1823.0	1823.5	1823.8	1824.5	1828.4	1828.7	1826.4	1825.0	1824.8	1824.9	1825.0	1825.0	1822.9	1820.3	1818.1	
DISCH KCFS	13.5	11.0	11.0	11.0	16.5	20.0	23.0	23.0	23.0	18.5	11.0	11.0	11.0	11.0	19.0	23.0	23.0	
POWER																		
AVE POWER MW		124	125	125	188	228	266	269	268	213	127	127	127	127	216	257	253	
PEAK POW MW		413	415	417	418	421	435	436	427	422	422	422	422	422	415	405	397	
ENERGY GWH	1848.4	44.7	21.0	27.1	135.1	169.4	191.2	200.4	199.0	153.2	94.2	45.6	21.3	24.3	160.9	191.2	169.8	
--OAKE--																		
NAT INFLOW	1300	203	95	122	180	130	275	140	65	75	15	13	6	7	-90	-10	75	
DEPLETION	652	23	11	14	48	69	138	164	109	27	-9	1	0	1	12	17	27	
CHAN STOR	-46	12	0	0	-26	-17	-15			22	37	0	0	0	-40	-20		
EVAPORATION	467							29	90	113	98	44	20	23	51			
REG INFLOW	13510	519	237	304	1087	1274	1491	1361	1281	1057	640	295	138	157	975	1367	1325	
RELEASE	13914	426	295	408	1203	1547	1445	1700	1536	990	1040	236	121	136	929	1012	890	
STOR CHANGE	-404	93	-58	-104	-116	-273	46	-339	-255	67	-400	59	17	21	46	355	436	
STORAGE	13793	13886	13828	13724	13609	13336	13382	13043	12788	12855	12455	12514	12531	12552	12598	12954	13389	
ELEV FTMSL	1589.1	1589.5	1589.3	1588.9	1588.4	1587.2	1587.4	1586.0	1584.9	1585.2	1583.4	1583.7	1583.7	1583.8	1584.0	1585.6	1587.5	
DISCH KCFS	16.1	14.3	21.2	22.9	20.2	25.2	24.3	27.7	25.0	16.6	16.9	7.9	8.7	8.6	15.1	16.5	16.0	
POWER																		
AVE POWER MW		168	248	266	235	291	280	317	285	190	192	90	99	98	171	188	184	
PEAK POW MW		616	615	613	611	604	606	598	592	594	584	586	586	587	588	596	606	
ENERGY GWH	1933.3	60.4	41.7	57.5	169.4	216.4	201.7	236.1	211.9	136.7	142.9	32.4	16.6	18.7	127.5	139.6	124.0	
--BIG BEND--																		
EVAPORATION	129						8	24	31	27	12	6	7	14				
REG INFLOW	13785	426	295	408	1203	1547	1445	1693	1511	959	1013	224	115	130	915	1012	890	
RELEASE	13785	426	295	408	1203	1547	1445	1693	1511	959	1013	224	115	130	915	1012	890	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	16.1	14.3	21.2	22.9	20.2	25.2	24.3	27.5	24.6	16.1	16.5	7.5	8.3	8.2	14.9	16.5	16.0	
POWER																		
AVE POWER MW		68	100	107	95	118	114	129	116	80	83	38	42	41	75	81	77	
PEAK POW MW		518	510	509	509	509	509	509	519	538	538	538	538	538	538	538	529	
ENERGY GWH	799.6	24.4	16.7	23.1	68.2	87.6	81.9	95.9	86.5	57.3	61.7	13.7	7.0	8.0	55.8	60.2	51.7	
--FORT RANDALL--																		
NAT INFLOW	450	73	34	44	90	65	125	35	25		-20	-8	-4	-4	-30	-15	40	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3	
EVAPORATION	133							10	31	35	25	10	5	5	12			
REG INFLOW	14024	498	328	451	1290	1603	1558	1700	1490	917	967	206	106	120	869	994	927	
RELEASE	14023	236	180	434	1290	1603	1558	1700	1678	1588	1362	206	106	120	717	694	553	
STOR CHANGE	0	262	148	17				0	-187	-670	-395	0	0	0	153	300	374	
STORAGE	3123	3384	3532	3549	3549	3549	3549	3549	3362	2692	2296	2296	2296	2296	2449	2749	3123	
ELEV FTMSL	1350.0	1353.2	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1353.0	1344.0	1337.5	1337.5	1337.5	1337.5	1340.1	1344.8	1350.0	
DISCH KCFS	10.0	7.9	13.0	24.3	21.7	26.1	26.2	27.6	27.3	26.7	22.2	6.9	7.7	7.6	11.7	11.3	10.0	
POWER																		
AVE POWER MW		66	110	205	183	220	221	233	228	213	165	51	56	55	86	86	80	
PEAK POW MW		350	355	356	356	356	356	356	349	314	285	285	285	285	297	319	339	
ENERGY GWH	1380.4	23.7	18.4	44.3	132.0	163.6	159.1	173.4	169.6	153.2	123.1	18.3	9.4	10.6	64.1	64.2	53.5	
--GAVINS POINT--																		
NAT INFLOW	1300	87	41	52	125	140	150	85	75	80	110	53	25	28	75	75	100	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	4	-10	-22	5	-8	0	-3	1	1	8	28	-1	0	-8	1	2	
EVAPORATION	47							3	9	11	10	5	2	2	5			
REG INFLOW	15163	327	211	464	1416	1716	1684	1740	1735	1662	1470	277	125	143	769	769	655	
RELEASE	15163	327	211	464	1416	1716	1684	1740	1722	1636	1470	277	125	143	769	769	694	
STOR CHANGE									13	26							-39	
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	12.5	11.0	15.2	26.0	23.8	27.9	28.3	28.3	28.0	27.5	23.9	9.3	9.0	9.0	12.5	12.5	12.5	
POWER																		
AVE POWER MW		39	53	89	82	95	96	96	96	95	84	33	32	32	44	44	44	
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76	
ENERGY GWH	634.0	13.9	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	62.5	12.0	5.4	6.2	33.0	33.0	29.6	
--GAVINS POINT - SIOUX CITY--																		
NAT INFLOW	1050	121	56	73	140	170	90	105	75	60	35	25	12	13	10	20	45	
DEPLETION	258	6	3	4	21	35	31	38	36	23	10	6	3	3	12	14	14	
REGULATED FLOW AT SIOUX CITY																		
KAF	15955	442	265	533	1535	1851	1743	1807	1761	1673	1495	297	134	153	767	775	725	
KCFS		14.9	19.1	29.9	25.8	30.1	29.3	29.4	28.6	28.1	24.3	10.0	9.7	9.7	12.5	12.6	13.1	
--TOTAL--																		
NAT INFLOW	19300	1111	518	666	1725	2570	4755	2615	1030	860	900	413	193	220	375	510	840	
DEPLETION	2463	21	10	13	195	505	1											

DATE OF STUDY 12/28/08

2008-2009 AOP LOWER DECILE RUNOFF SIMULATION

99001 9901 9901 PAGE 1

TIME OF STUDY 09:30:05

SHTN NAV SEAS 30 DAYS, SP MAR 5 MAY 9.7
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 8

	28FEB09	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB
VALUES IN 1000 AF EXCEPT AS INDICATED																	
--FORT PECK--	INI-SUM																
NAT INFLOW	5400	194	90	116	470	845	1195	610	270	245	320	158	74	84	230	210	290
DEPLETION	414	-22	-10	-13	43	217	441	201	-13	-111	-86	-22	-10	-12	-77	-67	-44
EVAPORATION	437							27	84	105	91	41	19	22	48		
MOD INFLOW	4549	216	101	129	427	628	754	382	199	251	315	138	64	74	259	277	334
RELEASE	4996	149	59	89	387	492	476	492	492	317	307	149	69	79	492	492	444
STOR CHANGE	-446	67	31	40	40	136	278	-110	-292	-65	7	-11	-5	-6	-232	-215	-110
STORAGE	10297	10364	10395	10435	10476	10612	10890	10780	10488	10422	10430	10419	10414	10408	10176	9961	9851
ELEV FTMSL	2208.4	2208.8	2209.0	2209.2	2209.4	2210.3	2212.0	2211.3	2209.5	2209.1	2209.2	2209.1	2209.1	2209.0	2207.6	2206.3	2205.6
DISCH KCFS	5.5	5.0	5.0	5.0	6.5	8.0	8.0	8.0	8.0	5.3	5.0	5.0	5.0	5.0	8.0	8.0	8.0
POWER																	
AVE POWER MW		62	62	62	80	99	99	100	99	66	62	62	62	62	98	97	97
PEAK POW MW		138	138	138	138	139	141	141	139	138	138	138	138	138	136	135	134
ENERGY GWH	744.7	22.2	10.4	13.3	57.7	73.5	71.6	74.2	73.7	47.3	45.9	22.2	10.4	11.8	73.0	72.4	65.1
--GARRISON--																	
NAT INFLOW	7400	365	170	219	575	1055	2205	1080	360	160	390	148	69	79	135	135	255
DEPLETION	990	13	6	8	76	156	566	461	100	-97	14	-103	-48	-55	-60	-31	-17
CHAN STOR	-27	5			-16	-16				28	3			0	-32		
EVAPORATION	520							33	101	125	108	49	23	26	56		
REG INFLOW	10860	506	234	301	870	1375	2115	1078	651	477	579	350	163	187	599	658	716
RELEASE	12714	357	167	232	774	1353	1309	1353	860	676	327	153	175	1168	1291	1166	
STOR CHANGE	-1854	149	67	68	96	22	806	-274	-702	-383	-98	23	11	12	-569	-633	-450
STORAGE	13692	13841	13908	13977	14073	14096	14902	14627	13925	13542	13445	13468	13478	13490	12921	12288	11838
ELEV FTMSL	1821.7	1822.2	1822.5	1822.8	1823.1	1823.2	1826.3	1825.3	1822.6	1821.1	1820.7	1820.8	1820.8	1820.9	1818.6	1816.0	1814.0
DISCH KCFS	13.5	12.0	12.0	13.0	13.0	22.0	22.0	22.0	22.0	14.5	11.0	11.0	11.0	11.0	19.0	21.0	21.0
POWER																	
AVE POWER MW		135	136	147	148	249	251	253	250	163	123	123	123	123	210	228	224
PEAK POW MW		412	413	414	415	416	427	423	413	408	406	407	407	407	399	389	382
ENERGY GWH	1723.4	48.7	22.8	31.8	106.2	185.0	180.9	188.2	185.9	117.1	91.7	44.3	20.7	23.7	156.2	169.5	150.7
--OAHE--																	
NAT INFLOW	1150	196	91	118	170	115	255	125	50	65	5	8	4	4	-100	-20	65
DEPLETION	652	23	11	14	48	69	138	164	109	27	-9	1	0	1	12	17	27
CHAN STOR	-37	7		-5		-44				38	18		0	0	-41	-10	
EVAPORATION	452							28	88	109	94	42	20	22	49		
REG INFLOW	12723	537	247	331	896	1355	1426	1285	1206	827	614	292	136	156	966	1244	1204
RELEASE	14113	436	299	414	1218	1562	1465	1715	1556	1010	1060	246	125	142	944	1022	900
STOR CHANGE	-1390	101	-51	-83	-322	-207	-39	-430	-350	-183	-446	46	11	14	23	222	305
STORAGE	13793	13894	13842	13760	13437	13230	13191	12761	12411	12228	11782	11828	11839	11853	11876	12098	12403
ELEV FTMSL	1589.1	1589.6	1589.3	1589.0	1587.7	1586.8	1586.6	1584.8	1583.2	1582.4	1580.3	1580.5	1580.6	1580.7	1580.8	1581.8	1583.2
DISCH KCFS	16.1	14.7	21.5	23.2	20.5	25.4	24.6	27.9	25.3	17.0	17.2	8.3	9.0	8.9	15.3	16.6	16.2
POWER																	
AVE POWER MW		172	251	270	238	293	283	318	286	191	192	92	101	99	171	185	182
PEAK POW MW		616	615	614	607	602	601	591	583	579	568	569	570	570	571	576	583
ENERGY GWH	1941.7	61.8	42.2	58.4	171.2	217.7	203.7	236.7	212.8	137.6	143.1	33.2	16.9	19.1	127.0	138.0	122.4
--BIG BEND--																	
EVAPORATION	129							8	24	31	27	12	6	7	14		
REG INFLOW	13984	436	299	414	1218	1562	1465	1707	1532	979	1033	234	120	135	930	1022	900
RELEASE	13984	436	299	414	1218	1562	1465	1707	1532	979	1033	234	120	135	930	1022	900
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
DISCH KCFS	16.1	14.7	21.5	23.2	20.5	25.4	24.6	27.8	24.9	16.5	16.8	7.9	8.6	8.5	15.1	16.6	16.2
POWER																	
AVE POWER MW		69	101	109	96	119	115	130	118	81	85	40	44	43	76	82	78
PEAK POW MW		518	510	509	509	509	509	509	519	538	538	538	538	538	538	538	529
ENERGY GWH	811.2	25.0	16.9	23.4	69.0	88.5	83.0	96.7	87.6	58.4	62.9	14.4	7.3	8.3	56.7	60.8	52.2
--FORT RANDALL--																	
NAT INFLOW	350	68	32	41	85	60	115	25	15	-10	-30	-13	-6	-7	-40	-20	35
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	
EVAPORATION	133							10	31	35	25	10	5	5	12		
REG INFLOW	14123	503	330	454	1300	1613	1568	1704	1501	927	977	211	108	122	874	999	932
RELEASE	14123	241	182	437	1300	1613	1568	1704	1688	1598	1372	211	109	122	721	699	558
STOR CHANGE	0	262	148	17	0	0	0	-187	-670	-395	0	0	0	0	153	300	374
STORAGE	3123	3384	3532	3549	3549	3549	3549	3362	2692	2296	2296	2296	2296	2296	2449	2749	3123
ELEV FTMSL	1350.0	1353.2	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1353.0	1344.0	1337.5	1337.5	1337.5	1337.5	1340.1	1344.8	1350.0
DISCH KCFS	10.0	8.1	13.1	24.5	21.8	26.2	26.4	27.7	27.4	26.8	22.3	7.1	7.8	7.7	11.7	11.4	10.0
POWER																	
AVE POWER MW		67	110	206	185	221	222	234	229	214	167	52	57	57	87	87	80
PEAK POW MW		350	355	356	356	356	356	356	349	314	285	285	285	285	297	319	339
ENERGY GWH	1390.0	24.2	18.6	44.6	133.0	164.7	160.1	173.8	170.6								

DATE OF STUDY 12/28/08

2008-2009 AOP EXTENSIONS, MEDIAN RUNOFF SIMULAT 99001 9901 4 PAGE

1

TIME OF STUDY 08:57:33

SHTN NAV SEAS 0 DAYS, SP MAR 5 MAY 15.0

STUDY NO 9

VALUES IN 1000 AF EXCEPT AS INDICATED

	28FEB10	VALUES IN 1000 ACRE-FT AS INDICATED												2011				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	7200	230	107	138	600	1180	1810	840	315	295	430	180	84	96	300	250	345	
DEPLETION	437	-28	-13	-17	-15	285	591	227	-1	-99	-38	-42	-19	-22	-133	-146	-94	
EVAPORATION	411							25	79	98	86	39	18	21	45			
MOD INFLOW	6352	257	120	154	615	895	1219	588	237	296	382	183	85	97	388	396	439	
RELEASE	5684	179	69	89	357	492	565	584	584	463	307	149	69	79	584	584	528	
STOR CHANGE	668	79	51	65	258	403	654	4	-347	-167	75	34	16	18	-196	-188	-89	
STORAGE	12497	12576	12626	12692	12950	13353	14006	14010	13663	13495	13570	13604	13620	13638	13442	13254	13165	
ELEV FTMSL	2221.2	2221.6	2221.9	2222.2	2223.6	2225.8	2229.2	2229.2	2227.4	2226.5	2226.9	2227.1	2227.2	2227.3	2226.3	2225.3	2224.8	
DISCH KCFS	7.5	6.0	5.0	5.0	6.0	8.0	9.5	9.5	9.5	7.8	5.0	5.0	5.0	5.0	9.5	9.5	9.5	
POWER																		
AVE POWER MW		78	65	66	79	106	127	127	127	104	67	67	67	67	126	126	126	
PEAK POW MW		152	152	153	154	156	159	159	157	157	157	157	157	157	157	156	155	
ENERGY GWH	914.5	26.2	11.0	14.2	56.8	78.8	91.3	94.8	94.6	74.7	49.7	24.0	11.2	12.8	94.1	93.8	84.5	
--GARRISON--																		
NAT INFLOW	10800	460	214	276	870	1325	3095	1860	595	460	495	195	91	104	180	260	320	
DEPLETION	1070	-6	-3	-3	-2	198	850	611	73	-138	-17	-117	-54	-62	-114	-90	-56	
CHAN STOR	-20	16	10		-10	-21	-15			17	28			0	-45			
EVAPORATION	479							29	93	115	100	45	21	24	52			
REG INFLOW	14914	660	297	368	1219	1598	2795	1804	1014	963	747	415	194	221	781	934	904	
RELEASE	14061	417	194	250	952	1291	1369	1414	1414	1206	861	417	194	222	1168	1414	1277	
STOR CHANGE	853	243	103	119	267	307	1426	390	-401	-243	-113	-1	-1	-1	-387	-480	-374	
STORAGE	15042	15285	15388	15506	15773	16080	17506	17896	17495	17252	17139	17138	17137	17136	16749	16269	15895	
ELEV FTMSL	1826.8	1827.7	1828.1	1828.5	1829.5	1830.6	1835.5	1836.8	1835.5	1834.6	1834.3	1834.3	1834.3	1834.3	1832.9	1831.2	1829.9	
DISCH KCFS	22.0	14.0	14.0	14.0	16.0	21.0	23.0	23.0	23.0	20.3	14.0	14.0	14.0	14.0	19.0	23.0	23.0	
POWER																		
AVE POWER MW		163	164	165	189	249	277	283	283	248	171	171	171	171	230	276	273	
PEAK POW MW		432	434	435	439	443	461	466	461	458	456	456	456	456	451	445	440	
ENERGY GWH	2051.7	58.8	27.6	35.5	135.8	184.9	199.6	210.4	210.4	178.4	127.4	61.6	28.7	32.8	171.4	205.0	183.4	
--OAKE--																		
NAT INFLOW	2300	232	108	139	405	195	780	160	75	95	35	30	14	16	-80		95	
DEPLETION	666	24	11	14	49	70	142	169	112	27	-10	1	0	1	12	17	27	
CHAN STOR	-4	36			-9	-22	-9			12	28			0	-22	-18		
EVAPORATION	444							28	87	107	92	41	19	22	47			
REG INFLOW	15247	661	292	375	1299	1395	1998	1377	1290	1179	841	404	189	216	1007	1379	1345	
RELEASE	14368	406	228	299	946	1337	1223	1704	1825	1614	1113	503	233	198	1087	953	701	
STOR CHANGE	879	254	64	76	353	58	775	-326	-535	-435	-271	-99	-44	18	-80	427	645	
STORAGE	15686	15941	16005	16081	16434	16492	17266	16940	16405	15970	15698	15599	15556	15574	15494	15920	16565	
ELEV FTMSL	1596.6	1597.5	1597.8	1598.1	1599.3	1599.5	1602.3	1601.1	1599.2	1597.6	1596.6	1596.3	1596.1	1596.2	1595.9	1597.5	1599.8	
DISCH KCFS	15.7	13.7	16.4	16.7	15.9	21.7	20.6	27.7	29.7	27.1	18.1	16.9	16.8	12.5	17.7	15.5	12.6	
POWER																		
AVE POWER MW		167	201	205	196	269	256	346	367	333	221	206	204	152	215	189	156	
PEAK POW MW		656	657	658	665	666	680	674	664	656	651	650	649	649	648	656	667	
ENERGY GWH	2140.3	60.1	33.7	44.4	141.2	199.9	184.4	257.3	273.2	239.4	164.5	74.1	34.2	29.1	159.6	140.5	104.6	
--BIG BEND--																		
EVAPORATION	103							6	20	25	22	10	5	5	11			
REG INFLOW	14265	406	228	299	946	1337	1223	1697	1806	1589	1091	494	228	193	1075	953	701	
RELEASE	14265	406	228	299	946	1337	1223	1697	1806	1589	1091	494	228	193	1075	953	701	
STOR CHANGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	15.7	13.7	16.4	16.7	15.9	21.7	20.6	27.6	29.4	26.7	17.7	16.6	16.4	12.1	17.5	15.5	12.6	
POWER																		
AVE POWER MW		65	77	78	74	102	96	129	137	127	87	83	83	61	86	75	61	
PEAK POW MW		517	509	509	509	509	509	509	509	517	538	538	538	538	538	538	529	
ENERGY GWH	822.9	23.3	12.9	16.9	53.6	75.7	69.3	96.1	102.2	91.1	64.8	30.0	13.9	11.8	64.3	56.1	40.7	
--FORT RANDALL--																		
NAT INFLOW	900	119	55	71	155	140	135	70	65	30		10	5	5	-10		45	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3	
EVAPORATION	118							8	25	31	25	10	4	4	10			
REG INFLOW	14969	523	282	369	1098	1468	1346	1741	1830	1581	1066	493	228	193	1067	940	743	
RELEASE	14969	232	148	369	1098	1468	1346	1741	1830	1725	1701	798	373	216	701	683	539	
STOR CHANGE	0	291	134	0	0	0	0	0	0	-144	-635	-305	-145	-23	366	257	204	
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124	
ELEV FTMSL	1350.0	1353.6	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1353.5	1345.1	1340.4	1337.9	1337.5	1343.5	1347.2	1350.0	
DISCH KCFS	9.7	7.8	10.7	20.7	18.5	23.9	22.6	28.3	29.8	29.0	27.7	26.8	26.9	13.6	11.4	11.1	9.7	
POWER																		
AVE POWER MW		65	90	175	156	202	191	239	251	242	222	203	197	100	86	87	78	
PEAK POW MW		351	356	356	356	356	356	356	356	350	320	298	287	285	313	330	339	
ENERGY GWH	1487.1	23.3	15.2	37.8	112.6	150.1	137.7	177.5	186.5	174.6	165.1	73.2	33.1	19.1	63.7	64.8	52.7	
--GAVINS POINT--																		
NAT INFLOW	1500	104	49	62	145	160	175	100	90	95	120	60	28	32	80	85	115	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	4	-6	-19	4	-10	2	-11	-3	1	2	2	0	25	4	1	3	
EVAPORATION	38							2	7	9	8	4	2	2	4			
REG INFLOW	16317	340	191	413	1244	1599	1500	1789	1901	1817	1814	851	397	268	771	767	656	
RELEASE	16317	340	191	413	1244	1599	1500	1789	1888	1791	1814	851	397	268	771	767	695	
STOR CHANGE								13	26								-39	
STORAGE	358	358	358	358	358	358	358	358	371	397	397							

DATE OF STUDY 12/28/08

2008-2009 AOF EXTENSIONS, MEDIAN RUNOFF SIMULAT 99001 9901 4 PAGE 1

TIME OF STUDY 08:57:33

SHT NV 0, SP MR 5 MY 15.5, FTFK +4.2 GARR -3.0

STUDY NO 10

VALUES IN 1000 AF EXCEPT AS INDICATED

	28FEB11	VALUES IN 1000 A/E/CE/PT AS INDICATED												2012				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	29FEB	
--FORT PECK--																		
NAT INFLOW	7200	230	107	138	600	1180	1810	840	315	295	430	180	84	96	300	250	345	
DEPLETION	452	-25	-12	-15	16	302	547	234	4	-99	-40	-41	-19	-22	-131	-144	-104	
EVAPORATION	443							27	85	106	93	42	20	22	49			
MOD INFLOW	6305	255	119	153	584	878	1263	579	226	288	377	179	83	95	382	394	449	
RELEASE	5091	179	69	89	357	430	476	492	492	367	307	149	69	79	523	523	489	
STOR CHANGE	1214	76	49	63	227	448	787	87	-266	-79	70	30	14	16	-140	-129	-40	
STORAGE	13165	13241	13291	13354	13581	14029	14815	14903	14637	14558	14628	14658	14672	14688	14548	14419	14379	
ELEV FTMSL	2224.8	2225.2	2225.5	2225.8	2227.0	2229.3	2233.1	2233.6	2232.3	2231.9	2232.2	2232.4	2232.5	2232.5	2231.9	2231.2	2231.0	
DISCH KCFS	9.5	6.0	5.0	5.0	6.0	7.0	8.0	8.0	8.0	6.2	5.0	5.0	5.0	5.0	8.5	8.5	8.5	
POWER																		
AVE POWER MW		80	66	66	80	94	108	109	109	84	68	68	68	68	115	115	115	
PEAK POW MW		156	156	156	157	159	162	162	161	161	161	161	161	161	161	160	160	
ENERGY GWH	832.0	28.6	11.2	14.4	57.6	69.7	77.8	81.0	80.9	60.3	50.5	24.5	11.4	13.0	85.7	85.5	79.9	
--GARRISON--																		
NAT INFLOW	10800	460	214	276	870	1325	3095	1860	595	460	495	195	91	104	180	260	320	
DEPLETION	1041	-7	-3	-4	-5	181	851	619	78	-140	-22	-120	-56	-64	-114	-90	-62	
CHAN STOR	10	36	10		-10	-10	-10		18	12				0	-35		0	
EVAPORATION	479							30	93	115	100	45	21	24	52			
REG INFLOW	14382	681	297	369	1222	1564	2710	1703	916	871	737	419	195	223	730	873	871	
RELEASE	14782	417	194	250	1012	1506	1458	1506	1506	1154	922	446	208	238	1107	1476	1381	
STOR CHANGE	-400	265	103	119	210	58	1252	197	-591	-283	-186	-27	-13	-15	-377	-603	-510	
STORAGE	15895	16160	16263	16383	16593	16651	17903	18099	17509	17225	17039	17012	16999	16985	16608	16005	15495	
ELEV FTMSL	1829.9	1830.9	1831.2	1831.6	1832.4	1832.6	1836.8	1837.5	1835.5	1834.6	1833.9	1833.8	1833.8	1833.7	1832.4	1830.3	1828.5	
DISCH KCFS	23.0	14.0	14.0	14.0	17.0	24.5	24.5	24.5	24.5	19.4	15.0	15.0	15.0	15.0	18.0	24.0	24.0	
POWER																		
AVE POWER MW		167	167	168	204	294	298	303	302	237	183	183	183	183	218	286	282	
PEAK POW MW		444	445	447	449	450	466	468	461	457	455	455	455	454	450	442	435	
ENERGY GWH	2164.6	60.0	28.1	36.3	147.1	218.8	214.7	225.4	224.4	170.8	136.2	65.8	30.7	35.0	161.9	212.8	196.5	
--OAH--																		
NAT INFLOW	2300	232	108	139	405	195	780	160	75	95	35	30	14	16	-80		95	
DEPLETION	681	24	11	14	49	71	145	173	116	28	-10	1	0	1	12	18	28	
CHAN STOR	-5	39			-13	-32			22	19					-13	-27		
EVAPORATION	456						29	90	110	94	42	20	22	22	48			
REG INFLOW	15940	664	292	375	1355	1599	2093	1465	1376	1132	892	433	202	231	953	1431	1448	
RELEASE	15480	406	258	360	1099	1497	1378	1813	1936	1721	1224	557	258	216	1080	953	726	
STOR CHANGE	460	258	34	15	256	102	715	-348	-560	-589	-332	-124	-55	16	-127	479	722	
STORAGE	16565	16823	16857	16872	17127	17229	17944	17596	17036	16447	16116	15992	15937	15952	15825	16304	17025	
ELEV FTMSL	1599.8	1600.7	1600.8	1600.9	1601.8	1602.1	1604.6	1603.4	1601.5	1599.4	1598.2	1597.7	1597.5	1597.6	1597.1	1598.9	1601.4	
DISCH KCFS	12.6	13.6	18.5	20.2	18.5	24.3	23.2	29.5	31.5	28.9	19.9	18.7	18.6	13.6	17.6	15.5	12.6	
POWER																		
AVE POWER MW		170	231	251	231	305	292	372	394	358	245	230	227	167	215	190	157	
PEAK POW MW		672	673	673	678	680	693	686	676	665	659	657	656	656	654	662	676	
ENERGY GWH	2331.9	61.1	38.8	54.3	166.3	226.7	210.4	277.1	293.2	258.0	182.4	82.7	38.2	32.0	159.9	141.6	109.3	
--BIG BEND--																		
EVAPORATION	103						6	20	25	22	10	5	5	5	11			
REG INFLOW	15377	406	258	360	1099	1497	1378	1806	1916	1696	1202	547	253	210	1069	953	726	
RELEASE	15377	406	258	360	1099	1497	1378	1806	1916	1696	1202	547	253	210	1069	953	726	
STOR CHANGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	12.6	13.6	18.5	20.2	18.5	24.3	23.2	29.4	31.2	28.5	19.5	18.4	18.2	13.3	17.4	15.5	12.6	
POWER																		
AVE POWER MW		65	87	95	86	114	108	137	146	135	96	92	92	67	86	75	61	
PEAK POW MW		517	509	509	509	509	509	509	509	517	538	538	538	538	538	538	529	
ENERGY GWH	886.5	23.3	14.6	20.4	62.3	84.8	78.0	102.3	108.5	97.3	71.3	33.2	15.4	12.8	63.9	56.1	42.2	
--FORT RANDALL--																		
NAT INFLOW	900	119	55	71	155	140	135	70	65	30		10	5	5	5	-10	45	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3	
EVAPORATION	118						8	25	31	25	10	4	4	4	10			
REG INFLOW	16080	523	312	431	1251	1628	1501	1850	1941	1688	1176	547	253	211	1061	940	768	
RELEASE	16080	523	312	431	1251	1628	1501	1850	1941	1688	1176	547	253	211	1061	940	768	
STOR CHANGE	0	291	134				0	0	-144	-635	-305	-145	-23	366	257	204		
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124	
ELEV FTMSL	1350.0	1353.6	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1353.5	1345.1	1340.4	1337.9	1337.5	1343.5	1347.2	1350.0	
DISCH KCFS	9.7	7.8	12.8	24.1	21.0	26.5	25.2	30.1	31.6	30.8	29.5	28.6	26.7	14.8	11.3	11.1	9.8	
POWER																		
AVE POWER MW		65	109	204	178	223	213	253	266	257	236	217	210	108	85	87	79	
PEAK POW MW		351	356	356	356	356	356	356	356	350	320	298	287	285	313	330	339	
ENERGY GWH	1597.2	23.3	18.2	44.0	128.1	166.2	153.3	188.5	197.5	185.2	175.7	78.0	35.3	20.7	63.2	64.8	55.1	
--GAVINS POINT--																		
NAT INFLOW	1500	104	49	62	145	160	175	100	90	95	120	60	28	32	80	85	115	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-2	4	-10	-22	6	-10	2	-9	-3	1	2	2	0	26	6	0	2	
EVAPORATION	38						2	7	9	8	4	2	2	2	4			
REG INFLOW	17429	340	217	472	1398	1759	1654	1900	2011	1924	1925	904	422	287	767	767	681	
RELEASE	17429	340	217	472	1398	1759	1654	1900	1998	1898	1925	904	422	287	767	767	720	
STOR CHANGE	0	291	134				0	0	-144	-635	-305	-145	-23	366	257	204		
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124	
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	12.5	11.4	15.6	26.4	23.5	28.6	27.8	30.9	32.5	31.9	31.3	30.4	30.4	18.1	12.5	12.5	12.5	
POWER																		
AVE POWER MW		40	54	90	81	97	95	103	107	107	107	105	105	64	44	44	44	
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76	
ENERGY GWH	718.7	14.4	9.2	19.5	58.0	72.4	68.2	76.6	79.7	77.2	79.4	37.7	17.6	12.3	33.0	33.0	30.7	
--GAVINS POINT - SIOUX CITY--																		
NAT INFLOW	1700	138	64	83	325	295	150	180	120	105	55	30						

DATE OF STUDY 12/28/08

2008-2009 AOP EXTENSIONS, MEDIAN RUNOFF SIMULAT 99001 9901

4 PAGE

1

TIME OF STUDY 08:57:33

SHT NV 0, SP MR 5 MY 14.7, GARR +3.0 OAHE -3.0

STUDY NO 11

VALUES IN 1000 AF EXCEPT AS INDICATED

	28FEB12	VALUES IN 1000 AF EXCEPT AS INDICATED												2013				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	7200	230	107	138	600	1180	1810	840	315	295	430	180	84	96	300	250	345	
DEPLETION	468	-24	-11	-14	15	303	552	241	8	-100	-41	-43	-20	-23	-134	-147	-94	
EVAPORATION	447							28	86	107	93	42	20	22	48			
MOD INFLOW	6285	254	118	152	585	877	1258	571	221	288	378	181	84	97	386	397	439	
RELEASE	6954	179	69	89	357	553	762	738	738	479	430	208	97	111	738	738	666	
STOR CHANGE	-669	75	49	63	228	324	496	-167	-517	-192	-53	-27	-13	-15	-352	-341	-227	
STORAGE	14379	14454	14503	14566	14794	15117	15614	15447	14930	14738	14685	14658	14645	14631	14279	13938	13710	
ELEV FTMSL	2231.0	2231.4	2231.6	2231.9	2233.0	2234.6	2236.9	2236.1	2233.7	2232.8	2232.5	2232.4	2232.3	2232.3	2230.5	2228.8	2227.7	
DISCH KCFS	8.5	6.0	5.0	5.0	6.0	9.0	12.8	12.0	12.0	8.1	7.0	7.0	7.0	7.0	12.0	12.0	12.0	
POWER																		
AVE POWER MW		81	68	68	82	123	163	161	159	110	95	95	95	95	157	156	154	
PEAK POW MW		160	160	161	162	163	164	164	162	161	161	161	161	161	160	158	158	
ENERGY GWH	1115.1	29.2	11.4	14.6	58.7	91.2	117.7	119.5	118.6	78.9	70.7	34.2	16.0	18.2	116.7	115.7	103.8	
--GARRISON--																		
NAT INFLOW	10800	460	214	276	870	1325	3095	1860	595	460	495	195	91	104	180	260	320	
DEPLETION	1063	-7	-3	-4	-4	182	861	636	84	-143	-26	-124	-58	-66	-117	-92	-57	
CHAN STOR	-36	26	10		-10	-31	-39	8	39	10	10			0	-50			
EVAPORATION	500							30	97	120	105	47	22	25	54			
REG INFLOW	16155	671	297	369	1221	1666	2957	1940	1152	1001	857	480	224	256	931	1090	1043	
RELEASE	14230	417	194	250	833	1537	1369	1414	1414	1185	984	476	222	254	1107	1353	1222	
STOR CHANGE	1924	254	103	119	388	129	1588	525	-262	-184	-126	4	2	2	-176	-263	-178	
STORAGE	15495	15749	15852	15972	16359	16488	18076	18602	18340	18156	18029	18033	18035	18037	17861	17598	17419	
ELEV FTMSL	1828.5	1829.4	1829.8	1830.2	1831.6	1832.0	1837.4	1839.1	1838.2	1837.6	1837.2	1837.2	1837.3	1837.3	1836.7	1835.8	1835.2	
DISCH KCFS	24.0	14.0	14.0	14.0	14.0	25.0	23.0	23.0	23.0	19.9	16.0	16.0	16.0	16.0	18.0	22.0	22.0	
POWER																		
AVE POWER MW		165	166	166	167	299	280	287	287	248	199	199	199	199	223	271	270	
PEAK POW MW		438	440	441	446	448	468	474	471	469	467	467	467	467	465	462	460	
ENERGY GWH	2112.9	59.5	27.9	35.9	120.5	222.2	201.8	213.2	213.7	178.5	148.1	71.6	33.4	38.2	166.0	201.5	181.1	
--OARE--																		
NAT INFLOW	2300	232	108	139	405	195	780	160	75	95	35	30	14	16	-80		95	
DEPLETION	696	24	11	15	50	72	148	178	119	29	-11	1	0	1	13	18	28	
CHAN STOR	8	42				-46	8		13	17	17				-9	-18	0	
EVAPORATION	448							29	89	108	92	41	19	22	47			
REG INFLOW	15395	667	291	375	1188	1614	2009	1368	1282	1156	955	464	217	247	957	1317	1289	
RELEASE	16033	406	285	404	1187	1589	1467	1854	1966	1751	1267	578	267	225	1099	971	717	
STOR CHANGE	-639	261	6	-30	2	25	542	-487	-685	-595	-312	-114	-51	23	-141	346	571	
STORAGE	17025	17286	17293	17263	17265	17290	17831	17345	16660	16065	15753	15639	15588	15611	15470	15815	16387	
ELEV FTMSL	1601.4	1602.3	1602.4	1602.3	1602.3	1602.3	1604.2	1602.5	1600.1	1598.0	1596.8	1596.4	1596.2	1596.3	1595.8	1597.1	1599.2	
DISCH KCFS	12.6	13.6	20.5	22.6	19.9	25.8	24.7	30.2	32.0	29.4	20.6	19.4	19.3	14.2	17.9	15.8	12.9	
POWER																		
AVE POWER MW		171	258	284	250	324	311	380	398	362	252	236	234	172	217	192	159	
PEAK POW MW		681	681	680	680	681	691	682	669	658	652	650	649	650	647	654	664	
ENERGY GWH	2406.5	61.7	43.3	61.4	180.3	241.0	223.8	282.4	296.0	260.5	187.3	85.1	39.3	33.1	161.4	143.0	106.8	
--BIG BEND--																		
EVAPORATION	103						6	20	25	22	10	5	5	5	11			
REG INFLOW	15930	406	285	404	1187	1589	1467	1848	1947	1726	1245	568	263	220	1088	971	717	
RELEASE	15930	406	285	404	1187	1589	1467	1848	1947	1726	1245	568	263	220	1088	971	717	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	12.6	13.6	20.5	22.6	19.9	25.8	24.7	30.1	31.7	29.0	20.3	19.1	18.9	13.8	17.7	15.8	12.9	
POWER																		
AVE POWER MW		65	96	106	93	121	115	141	148	137	99	96	95	70	87	77	62	
PEAK POW MW		517	509	509	509	509	509	509	509	517	538	538	538	538	538	538	529	
ENERGY GWH	918.2	23.3	16.1	22.9	67.2	90.0	83.1	104.6	110.2	99.0	73.9	34.5	16.0	13.4	65.0	57.2	41.7	
--FORT RANDALL--																		
NAT INFLOW	900	119	55	71	155	140	135	70	65	30	10	5	5	5	-10		45	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	0	1	1	3	3	3	
EVAPORATION	118						8	25	31	25	10	4	4	4	10			
REG INFLOW	16634	523	340	474	1339	1720	1590	1892	1971	1717	1220	567	263	221	1079	958	759	
RELEASE	16634	523	340	474	1339	1720	1590	1892	1971	1717	1220	567	263	221	1079	958	759	
STOR CHANGE	0	291	134				0	0	-144	-635	-305	-145	-23	366	257	204		
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124	
ELEV FTMSL	1350.0	1353.6	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1353.5	1345.1	1340.4	1337.9	1337.5	1343.5	1347.2	1350.0	
DISCH KCFS	9.8	7.8	14.8	26.6	22.5	28.0	26.7	30.8	32.1	31.3	30.2	29.3	29.4	15.3	11.6	11.4	10.0	
POWER																		
AVE POWER MW		65	125	224	190	236	225	259	270	261	242	222	215	112	87	89	81	
PEAK POW MW		351	356	356	356	356	356	356	356	350	320	298	287	285	313	330	339	
ENERGY GWH	1651.9	23.3	21.0	48.4	136.9	175.4	162.3	192.6	200.6	188.2	179.8	79.9	36.2	21.5	64.8	66.5	54.3	
--GAVINS POINT--																		
NAT INFLOW	1500	104	49	62	145	160	175	100	90	95	120	60	28	32	80	85	115	
DEPLETION	112	0	0	0	4</													

DATE OF STUDY 12/28/08

2008-2009 AOF EXTENSIONS, MEDIAN RUNOFF SIMULAT 99001 9901

4 PAGE

1

TIME OF STUDY 08:57:33

SHT NV 0, SP MR 5 MY 14.1, FTK -4.2 OAHE -3.0

STUDY NO 12

VALUES IN 1000 AF EXCEPT AS INDICATED

	28FEB13	2013												2014					
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		
--FORT PECK--																			
NAT INFLOW	7200	230	107	138	600	1180	1810	840	315	295	430	180	84	96	300	250	345		
DEPLETION	477	-25	-12	-15	15	304	556	248	12	-100	-43	-44	-20	-23	-135	-147	-95		
EVAPORATION	418							26	82	100	87	39	18	21	45				
MOD INFLOW	6305	255	119	153	585	876	1254	566	221	295	386	184	86	98	390	397	440		
RELEASE	6995	179	83	107	357	615	1083	646	646	526	492	238	111	127	615	615	555		
STOR CHANGE	-689	76	35	46	228	261	171	-80	-424	-232	-106	-54	-25	-28	-225	-218	-115		
STORAGE	13710	13786	13822	13867	14095	14357	14528	14448	14023	13792	13686	13632	13608	13579	13354	13137	13021		
ELEV FTMSL	2227.7	2228.1	2228.2	2228.5	2229.6	2230.9	2231.8	2231.4	2229.3	2228.1	2227.5	2227.3	2227.1	2227.0	2225.8	2224.6	2224.0		
DISCH KCFS	12.0	6.0	6.0	6.0	6.0	10.0	18.2	10.5	10.5	8.8	8.0	8.0	8.0	8.0	10.0	10.0	10.0		
POWER																			
AVE POWER MW		80	80	80	81	134	160	141	140	119	107	107	107	107	133	132	132		
PEAK POW MW		158	158	158	159	160	160	160	159	158	157	157	157	157	156	155	154		
ENERGY GWH	1068.8	28.9	13.5	17.4	58.1	100.0	115.0	104.6	104.1	85.4	79.6	38.5	17.9	20.5	98.7	98.3	88.5		
--GARRISON--																			
NAT INFLOW	10800	460	214	276	870	1325	3095	1860	595	460	495	195	91	104	180	260	320		
DEPLETION	1074	-7	-3	-4	-4	182	871	652	89	-146	-32	-127	-59	-68	-119	-93	-58		
CHAN STOR	19	60				-40	-81	75		16	8				-20				
EVAPORATION	518							33	102	125	107	48	22	26	55				
REG INFLOW	16221	705	301	387	1231	1718	3226	1896	1050	1023	920	512	239	273	839	968	933		
RELEASE	17051	417	194	250	1071	1660	1666	1722	1722	1538	1168	565	264	301	1353	1660	1500		
STOR CHANGE	-830	289	107	137	160	58	1560	174	-672	-515	-248	-53	-25	-28	-513	-692	-566		
STORAGE	17419	17708	17815	17952	18112	18170	19729	19903	19231	18716	18468	18414	18389	18361	17848	17155	16589		
ELEV FTMSL	1835.2	1836.2	1836.5	1837.0	1837.5	1837.7	1842.5	1843.1	1841.0	1839.4	1838.6	1838.5	1838.4	1838.3	1836.6	1834.3	1832.4		
DISCH KCFS	22.0	14.0	14.0	14.0	18.0	27.0	28.0	28.0	28.0	25.9	19.0	19.0	19.0	19.0	22.0	27.0	27.0		
POWER																			
AVE POWER MW		173	173	174	223	334	352	356	354	325	238	238	237	237	273	330	325		
PEAK POW MW		463	465	466	468	469	495	498	481	475	472	472	471	471	465	456	449		
ENERGY GWH	2570.0	62.1	29.1	37.5	160.9	248.8	253.4	264.8	263.7	234.3	177.3	85.5	39.9	45.6	203.0	245.4	218.7		
--OAHE--																			
NAT INFLOW	2300	232	108	139	405	195	780	160	75	95	35	30	14	16	-80		95		
DEPLETION	709	24	11	15	50	73	151	182	122	30	-11	1	0	1	13	18	29		
CHAN STOR	-21	35			-17	-38	-4			9	29				-13	-21			
EVAPORATION	466						29		90	112	97	44	20	23	51				
REG INFLOW	18156	659	291	375	1409	1744	2291	1671	1585	1501	1146	551	257	294	1196	1621	1566		
RELEASE	16291	406	286	406	1223	1620	1503	1853	1979	1763	1267	578	267	228	1142	1014	756		
STOR CHANGE	1864	253	5	-31	186	124	788	-182	-394	-262	-120	-27	-10	65	54	607	809		
STORAGE	16387	16640	16645	16614	16800	16924	17712	17530	17135	16874	16753	16726	16716	16781	16835	17442	18251		
ELEV FTMSL	1599.2	1600.1	1600.1	1600.0	1600.6	1601.1	1603.8	1603.2	1601.8	1600.9	1600.5	1600.4	1600.3	1600.6	1600.8	1602.9	1605.6		
DISCH KCFS	12.9	13.6	20.6	22.7	20.6	26.3	25.3	30.1	32.2	29.6	20.6	19.4	19.3	14.4	18.6	16.5	13.6		
POWER																			
AVE POWER MW		169	256	282	255	328	317	380	403	369	256	241	239	179	231	207	173		
PEAK POW MW		669	669	668	672	674	688	685	678	673	671	670	670	671	672	683	698		
ENERGY GWH	2462.9	60.9	43.0	60.9	183.8	243.7	228.2	282.4	299.8	265.6	190.7	86.9	40.2	34.4	172.1	153.9	116.4		
--BIG BEND--																			
EVAPORATION	103						6	20	25	22	10	5	5	5	11				
REG INFLOW	16188	406	286	406	1223	1620	1503	1847	1959	1738	1245	568	263	223	1131	1014	756		
RELEASE	16188	406	286	406	1223	1620	1503	1847	1959	1738	1245	568	263	223	1131	1014	756		
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621		
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0		
DISCH KCFS	12.9	13.6	20.6	22.7	20.6	26.3	25.3	30.0	31.9	29.2	20.2	19.1	18.9	14.1	18.4	16.5	13.6		
POWER																			
AVE POWER MW		65	97	106	96	123	118	141	149	138	99	96	95	71	91	80	65		
PEAK POW MW		517	509	509	509	509	509	509	509	517	538	538	538	538	538	538	529		
ENERGY GWH	933.0	23.3	16.2	23.0	69.3	91.7	85.1	104.6	110.9	99.6	73.9	34.5	16.0	13.6	67.6	59.8	43.9		
--FORT RANDALL--																			
NAT INFLOW	900	119	55	71	155	140	135	70	65	30		10	5	5	5	-10	45		
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3		
EVAPORATION	118						8	25	31	25	10	4	4	4	10				
REG INFLOW	16892	523	341	476	1375	1751	1626	1891	1984	1729	1219	567	263	224	1122	1001	798		
RELEASE	16892	232	207	476	1375	1751	1626	1891	1984	1873	1854	872	408	247	756	744	594		
STOR CHANGE	0	291	134			0		0	-144	-635	-305	-145	-23	366	257	204			
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124		
ELEV FTMSL	1350.0	1353.6	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1353.5	1345.1	1340.4	1337.9	1337.5	1343.5	1347.2	1350.0		
DISCH KCFS	10.0	7.8	14.9	26.7	23.1	28.5	27.3	30.7	32.3	31.5	30.2	29.3	29.4	15.6	12.3	12.1	10.7		
POWER																			
AVE POWER MW		65	126	225	195	240	230	259	271	263	242	222	215	114	92	95	86		
PEAK POW MW		351	356	356	356	356	356	356	356	350	320	298	287	285	313	330	339		
ENERGY GWH	1676.8	23.3	21.1	48.6	140.6	178.5	165.9	192.5	201.9	189.4	179.8	79.9	36.2	21.8	68.7	70.6	58.0		
--GAVINS POINT--																			
NAT INFLOW	1500	104	49	62	145	160	175	100	90	95	120	60	28	32	80	85	115		
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1			
CHAN STOR	-3	4	-14	-23	7	-10	2	-7	-3	1	2	2	0	2	6	0	3		
EVAPORATION	38						2	7	9	8	4	2	2	2	4				
REG INFLOW	18239	341	242	516	1523	1882	1779	1943	2054	1966	1968	925	432	300	828	828	712		
RELEASE	18239	341	242	516	1523	1882	1779	1943	2041	1940	1968	925	432	300	828	828	751		
STOR CHANGE							13	26									-39		
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358		
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0		
DISCH KCFS	12.8	11.5	17.4	28.9	25.6	30.6	29.9	31.6	33.2	32.6	32.0	31.1	31.1	18.9	13.5	13.5	13.5		
POWER																			
AVE POWER MW		40	60	98	87	102	101	105	109	109	108	106	106	67	48	48	48		
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76		
ENERGY GWH	747.1	14.5	10.2	21.2	63.0	76.1	72.5	77.8	80.8	78.3	80.6	38.2	17.8	12.8	35.6	35.6	32.0		
--GAVINS POINT - SIOUX CITY--																			
NAT INFLOW	1700	138	64	83	325	295	150	180	120	105	55	30	14	16	25	25	75		
DEPLETION	270	7	3	4	23	36													

DATE OF STUDY 12/28/08

2008-2009 AOF EXTENSIONS, MEDIAN RUNOFF SIMULAT 99001 9901 4 PAGE

1

TIME OF STUDY 08:57:33

SHT NV D, SP MR 5 MY 13.7, FTPEK +4.2 GARR -3.0
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 13

	28FEB14	VALUES IN 1000 AF EXCEPT AS INDICATED												2015					
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		
--FORT PECK--																			
NAT INFLOW	7200	230	107	138	600	1180	1810	840	315	295	430	180	84	96	300	250	345		
DEPLETION	488	-25	-12	-15	15	305	560	255	17	-100	-45	-44	-21	-23	-136	-148	-95		
EVAPORATION	446							27	85	106	94	43	20	23	49				
MOD INFLOW	6266	255	119	153	585	875	1250	558	213	289	381	181	85	97	387	398	440		
RELEASE	4358	179	83	107	357	369	417	430	430	253	246	119	56	63	430	430	389		
STOR CHANGE	1907	77	36	46	228	506	833	128	-217	36	135	62	29	33	-44	-32	51		
STORAGE	13021	13098	13133	13179	13407	13913	14747	14875	14657	14693	14829	14891	14920	14954	14910	14877	14929		
ELEV FTMSL	2224.0	2224.4	2224.6	2224.9	2226.1	2228.7	2232.8	2233.4	2232.4	2232.6	2233.2	2233.5	2233.6	2233.8	2233.6	2233.4	2233.7		
DISCH KCFS	10.0	6.0	6.0	6.0	6.0	6.0	7.0	7.0	7.0	4.2	4.0	4.0	4.0	4.0	7.0	7.0	7.0		
POWER																			
AVE POWER MW		79	79	80	80	80	95	95	95	58	54	55	55	55	95	95	95		
PEAK POW MW		155	155	155	156	158	161	162	161	161	162	162	162	162	162	162	162		
ENERGY GWH	713.1	28.6	13.3	17.2	57.4	59.7	68.1	70.8	70.8	41.5	40.5	19.6	9.2	10.5	71.0	70.9	64.1		
--GARRISON--																			
NAT INFLOW	10800	460	214	276	870	1325	3095	1860	595	460	495	195	91	104	180	260	320		
DEPLETION	728	-6	-3	-4	-3	-182	881	668	95	-149	-36	-131	-61	-70	-120	-93	-58		
CHAN STOR	30	41					-10			27	2				-30				
EVAPORATION	498							31	98	121	104	46	22	25	53				
REG INFLOW	13962	685	301	387	1230	1876	2621	1591	833	768	676	399	186	213	648	783	767		
RELEASE	14467	476	222	286	1101	1537	1369	1353	1353	1092	984	476	222	254	1168	1353	1222		
STOR CHANGE	-505	209	79	101	129	339	1252	239	-520	-324	-308	-77	-36	-41	-521	-569	-455		
STORAGE	16589	16798	16877	16978	17107	17446	18698	18936	18416	18092	17784	17707	17671	17630	17109	16540	16085		
ELEV FTMSL	1832.4	1833.1	1833.4	1833.7	1834.2	1835.3	1839.4	1840.1	1838.5	1837.4	1836.4	1836.2	1836.1	1835.9	1834.2	1832.2	1830.6		
DISCH KCFS	27.0	16.0	16.0	16.0	18.5	25.0	23.0	22.0	22.0	18.4	16.0	16.0	16.0	16.0	19.0	22.0	22.0		
POWER																			
AVE POWER MW		193	194	194	225	304	285	277	276	229	198	198	197	197	232	266	263		
PEAK POW MW		452	453	454	456	460	475	478	472	468	464	463	463	462	456	449	443		
ENERGY GWH	2150.2	69.6	32.6	42.0	161.9	226.4	205.1	205.8	205.3	164.7	147.7	71.2	33.2	37.9	173.0	197.6	176.4		
--OAH--																			
NAT INFLOW	2300	232	108	139	405	195	780	160	75	95	35	30	14	16	-80		95		
DEPLETION	724	25	12	15	51	75	154	187	125	30	-12	1	0	1	13	19	29		
CHAN STOR	20	45			-10	-26	8	4		15	10				-13	-13	0		
EVAPORATION	477							31	94	115	98	44	20	23	51				
REG INFLOW	15586	728	319	410	1445	1631	2003	1299	1208	1057	943	461	215	246	1012	1321	1288		
RELEASE	16209	406	286	406	1248	1638	1527	1852	1979	1763	1267	578	267	223	1093	965	712		
STOR CHANGE	-623	322	33	4	197	-7	476	-553	-771	-705	-324	-117	-52	23	-81	356	576		
STORAGE	18251	18574	18606	18610	18807	18801	19276	18723	17952	17247	16923	16806	16754	16777	16696	17052	17628		
ELEV FTMSL	1605.6	1606.7	1606.8	1606.8	1607.4	1607.4	1608.9	1607.1	1604.6	1602.2	1601.1	1600.7	1600.5	1600.6	1600.3	1601.5	1603.5		
DISCH KCFS	13.6	13.6	20.6	22.7	21.0	26.6	25.7	30.1	32.2	29.6	20.6	19.4	19.3	14.1	17.8	15.7	12.8		
POWER																			
AVE POWER MW		175	265	292	270	343	332	389	410	373	258	242	240	175	221	196	162		
PEAK POW MW		703	704	704	707	707	715	706	692	680	674	672	671	671	670	676	687		
ENERGY GWH	2494.8	63.1	44.5	63.2	194.6	255.4	239.1	289.4	305.4	268.6	191.7	87.1	40.3	33.6	164.5	145.7	108.6		
--BIG BEND--																			
EVAPORATION	103						6	20	25	22	10	5	5	5	11				
REG INFLOW	16106	406	286	406	1248	1638	1527	1846	1959	1738	1245	568	263	218	1081	965	712		
RELEASE	16106	406	286	406	1248	1638	1527	1846	1959	1738	1245	568	263	218	1081	965	712		
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621		
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0		
DISCH KCFS	13.6	13.6	20.6	22.7	21.0	26.6	25.7	30.0	31.9	29.2	20.2	19.1	18.9	13.7	17.6	15.7	12.8		
POWER																			
AVE POWER MW		65	97	106	98	125	120	140	149	138	99	96	95	69	87	76	62		
PEAK POW MW		517	509	509	509	509	509	509	509	517	538	538	538	538	538	538	529		
ENERGY GWH	928.0	23.3	16.2	23.0	70.7	92.8	86.5	104.5	111.0	99.6	73.9	34.5	16.0	13.3	64.7	56.9	41.3		
--FORT RANDALL--																			
NAT INFLOW	900	119	55	71	155	140	135	70	65	30	10	5	5	5	-10	45			
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3		
EVAPORATION	118						8	25	31	25	10	4	4	4	10				
REG INFLOW	16810	523	341	476	1400	1769	1650	1890	1984	1729	1219	567	263	219	1073	952	754		
RELEASE	16810	523	341	476	1400	1769	1650	1890	1984	1729	1219	567	263	219	1073	952	754		
STOR CHANGE	0	291	134				0	0	-144	-635	-305	-145	-23	366	257	204			
STORAGE	3124	3415	3549	3549	3549	3549	3549	3549	3405	2770	2465	2320	2297	2663	2920	3124			
ELEV FTMSL	1350.0	1353.6	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1353.5	1345.1	1340.4	1337.9	1337.5	1337.5	1343.5	1347.2	1350.0		
DISCH KCFS	10.7	7.8	14.9	26.7	23.5	28.8	27.7	30.7	32.3	31.5	30.2	29.3	29.4	15.2	11.5	11.3	9.9		
POWER																			
AVE POWER MW		65	126	225	199	242	234	259	271	263	242	222	215	111	86	89	80		
PEAK POW MW		351	356	356	356	356	356	356	356	350	320	298	287	285	313	330	339		
ENERGY GWH	1669.6	23.3	21.1	48.6	143.1	180.3	168.3	192.4	201.9	189.4	179.8	79.9	36.2	21.3	64.3	66.0	53.7		
--GAVINS POINT--																			
NAT INFLOW	1500	104	49	62	145	160	175	100	90	95	120	60	28	32	80	85	115		
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1			
CHAN STOR	0	6	-14	-23	6	-10	2	-6	-3	1	2	0	0	26	7	0	3		
EVAPORATION	38						2	7	9	8	4	2	2	2	4				
REG INFLOW	18160	342	242	516	1547	1900	1803	1943	2054	1966	1968	925	432	295	780	779	667		
RELEASE	18160	342	242	516	1547	1900	1803	1943	2041	1940	1968	925	432	295	780	779	706		
STOR CHANGE	0	291	134				0	0	-144	-635	-305	-145	-23	366	257	204			
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397						

STUDY NO 14

1

	28FEB10		2010				VALUES IN 1000 AF EXCEPT AS INDICATED							2011				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	6100	207	96	124	493	971	1505	676	290	259	346	168	78	89	264	224	310	
DEPLETION	469	-12	-6	-7	48	286	528	219	-9	-112	-50	-38	-18	-20	-119	-132	-89	
EVAPORATION	448							86	107	107	94	42	20	23	49			
MOD INFLOW	5183	219	102	131	445	685	977	429	213	264	302	163	76	87	334	356	399	
RELEASE	5361	149	69	89	357	492	536	553	553	351	307	149	69	79	553	553	500	
STOR CHANGE	-178	70	33	42	88	193	441	-124	-340	-87	-5	14	7	8	-219	-197	-101	
STORAGE	10640	10710	10743	10785	10873	11066	11507	11383	11043	10956	10951	10965	10972	10980	10760	10563	10462	
ELEV FTMSL	2210.4	2210.9	2211.1	2211.3	2211.8	2213.0	2215.6	2214.9	2212.9	2212.3	2212.3	2212.4	2212.4	2212.5	2211.2	2210.9	2209.4	
DISCH KCFS	7.5	5.0	5.0	5.0	6.0	8.0	9.0	9.0	9.0	5.9	5.0	5.0	5.0	5.0	9.0	9.0	9.0	
POWER																		
AVE POWER MW		62	62	62	75	100	114	114	113	74	63	63	63	63	112	111	111	
PEAK POW MW		140	140	141	141	143	145	145	142	142	142	142	142	142	140	139	138	
ENERGY GWH	811.5	22.4	10.5	13.5	53.9	74.4	81.7	84.8	84.3	53.3	46.6	22.6	10.5	12.0	83.4	82.9	74.6	
--GARRISON--																		
NAT INFLOW	9338	430	200	258	716	1127	2674	1609	513	396	426	168	78	89	152	223	279	
DEPLETION	987	7	3	4	15	132	775	598	87	-134	10	-117	-54	-62	-116	-90	-61	
CHAN STOR	-15	27			-11	-21	-11			33	10				-42			
EVAPORATION	521							32	100	125	109	49	23	26	57			
REG INFLOW	13175	599	267	343	1047	1465	2424	1533	879	789	634	384	179	205	722	866	840	
RELEASE	13384	387	180	232	1071	1537	1428	1291	1291	949	738	357	167	190	1107	1291	1166	
STOR CHANGE	-209	212	86	111	-24	-72	996	241	-412	-161	-104	26	12	14	-385	-425	-326	
STORAGE	12800	13012	13098	13209	13185	13114	14109	14351	13939	13778	13674	13701	13713	13727	13342	12918	12591	
ELEV FTMSL	1818.1	1818.9	1819.3	1819.7	1819.6	1819.3	1823.3	1824.2	1822.6	1822.0	1821.6	1821.7	1821.7	1821.8	1820.3	1818.6	1817.2	
DISCH KCFS	23.0	13.0	13.0	13.0	18.0	25.0	24.0	21.0	21.0	16.0	12.0	12.0	12.0	12.0	18.0	21.0	21.0	
POWER																		
AVE POWER MW		143	144	144	199	275	267	238	238	180	135	135	135	135	201	231	229	
PEAK POW MW		400	401	403	403	402	416	419	414	411	410	410	410	411	405	399	394	
ENERGY GWH	1804.2	51.5	24.1	31.1	143.3	204.6	192.6	177.3	176.9	129.5	100.6	48.6	22.7	26.0	149.5	172.1	153.8	
--OAH--																		
NAT INFLOW	1369	214	100	128	190	137	290	147	68	79	16	13	6	7	-95	-10	79	
DEPLETION	666	24	11	14	49	70	142	169	112	27	-10	1	0	1	12	17	27	
CHAN STOR	9	49			-24	-34	5	14		25	20				-30	-15		
EVAPORATION	470							29	91	113	98	44	21	23	51			
REG INFLOW	13627	626	269	346	1188	1570	1581	1254	1157	913	686	325	152	173	919	1249	1218	
RELEASE	13840	421	279	404	1195	1541	1435	1697	1536	858	1165	226	121	136	928	1014	884	
STOR CHANGE	-213	205	-9	-58	-7	29	146	-443	-379	55	-479	100	30	37	-9	235	334	
STORAGE	13389	13594	13585	13526	13519	13549	13694	13252	12872	12927	12448	12548	12578	12615	12606	12842	13176	
ELEV FTMSL	1587.5	1588.3	1588.3	1588.0	1588.0	1588.1	1588.7	1586.9	1585.2	1585.5	1583.4	1583.8	1584.0	1584.1	1584.1	1585.1	1586.5	
DISCH KCFS	16.0	14.1	20.1	22.6	20.1	25.1	24.1	27.6	25.0	14.4	18.9	7.6	8.7	8.6	15.1	16.5	15.9	
POWER																		
AVE POWER MW		164	233	263	233	290	280	319	286	165	215	86	99	98	171	188	183	
PEAK POW MW		610	610	609	609	609	612	603	594	595	584	586	587	588	588	593	601	
ENERGY GWH	1925.1	59.1	39.2	56.7	167.7	215.9	201.6	237.2	212.7	118.8	160.1	31.0	16.7	18.7	127.5	139.6	122.6	
--BIG BEND--																		
EVAPORATION	129						8	24	31	27	12		6	7	14			
REG INFLOW	13711	421	279	404	1195	1541	1435	1690	1511	827	1138	213	116	130	914	1014	884	
RELEASE	13711	421	279	404	1195	1541	1435	1690	1511	827	1138	213	116	130	914	1014	884	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	16.0	14.1	20.1	22.6	20.1	25.1	24.1	27.5	24.6	13.9	18.5	7.2	8.3	8.2	14.9	16.5	15.9	
POWER																		
AVE POWER MW		67	94	106	94	117	113	129	116	69	93	36	42	41	75	81	76	
PEAK POW MW		517	510	509	509	509	509	509	519	538	538	538	538	538	538	538	529	
ENERGY GWH	796.0	24.1	15.8	22.9	67.7	87.3	81.3	95.7	86.5	50.0	69.2	13.1	7.1	8.0	55.7	60.3	51.3	
--FORT RANDALL--																		
NAT INFLOW	480	77	36	46	96	69	133	37	27		-21	-8	-4	-4	-32	-16	43	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3	
EVAPORATION	131							10	31	34	24	10	5	5	12			
REG INFLOW	13982	497	314	450	1288	1601	1556	1699	1492	786	1092	196	107	119	866	995	924	
RELEASE	13982	223	179	433	1288	1601	1556	1699	1677	1587	1360	196	107	119	713	695	550	
STOR CHANGE	0	274	135	17				0	-184	-800	-268	0	0	0	153	300	374	
STORAGE	3123	3397	3532	3549	3549	3549	3549	3549	3365	2565	2297	2296	2296	2296	2449	2749	3123	
ELEV FTMSL	1350.0	1353.4	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1353.0	1342.0	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0	
DISCH KCFS	10.0	7.5	12.9	24.3	21.6	26.0	26.2	27.6	27.3	26.7	22.1	6.6	7.7	7.5	11.6	11.3	9.9	
POWER																		
AVE POWER MW		62	109	205	183	220	221	233	228	211	164	48	56	55	86	86	79	
PEAK POW MW		350	355	356	356	356	356	356	349	305	285	285	285	285	297	319	339	
ENERGY GWH	1374.2	22.4	18.3	44.2	131.8	163.4	158.9	173.3	169.5	151.8	121.8	17.4	9.5	10.6	63.8	64.3	53.2	
--GAVINS POINT--																		
NAT INFLOW	1318	89	41	53	127	142	152	86	76	81	112	53	25	28	76	76	101	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	5	-10	-22	5	-8	0	-3	1	1	8	29	-2	0	-8	1	3	
EVAPORATION	47							3	9	11	10	5	2	2	5			
REG INFLOW	15140	317	210	465	1416	1716	1684	1740	1735	1662	1470	268	125	143	766	770	653	
RELEASE	15140	317	210	465	1416	1716	1684	1740	1722	1636	1470	268	125	143	766	770	692	
STOR CHANGE									13	26							-39	
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	12.5	10.7	15.1	26.0	23.8	27.9	28.3	28.3	28.0	27.5	23.9	9.0	9.0	9.0	12.5	12.5	12.5	
POWER																		
AVE POWER MW		37	53	89	82	95	96	96	96	95	84	32	32	32	44	45	44	
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76	
ENERGY GWH	633.1	13.4	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	62.5	11.6	5.4	6.2	32.9	33.1	29.6	
--GAVINS POINT - SIOUX CITY--																		
NAT INFLOW	1095	126	59	76	146	177	94	109	78	63	37	26	12	14	10	21	47	
DEPLETION	263	7	3	4	22	35	31	38	36	24	10	6	3	3	13	14	14	
REGULATED FLOW AT SIOUX CITY																		
KAF	15972	436	266	53														

TIME OF STUDY 09:14:30

SHTN NAV SEAS 30 DAYS, SP MAR 5 MAY 9.6

VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 15

	28FEB11	2011													2012				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	29FEB		
--FORT PECK--																			
NAT INFLOW	6345	215	100	129	513	1010	1565	703	301	270	360	175	81	93	275	233	322		
DEPLETION	453	-26	-12	-15	22	288	559	228	-5	-112	-52	-38	-18	-20	-118	-131	-98		
EVAPORATION	447							27	86	107	94	42	20	23	49				
MOD INFLOW	5445	241	112	144	491	722	1006	448	220	275	318	170	79	90	344	364	420		
RELEASE	5388	149	69	89	357	553	536	553	298	307	149	69	79	553	553	518			
STOR CHANGE	57	92	43	55	134	169	470	-106	-333	-23	11	21	10	11	-209	-189	-98		
STORAGE	10462	10554	10597	10652	10786	10954	11425	11319	10986	10963	10974	10994	11004	11015	10806	10616	10519		
ELEV FTMSL	2209.4	2209.9	2210.2	2210.5	2211.3	2212.3	2215.1	2214.5	2212.5	2212.4	2212.4	2212.6	2212.6	2212.7	2211.4	2210.3	2209.7		
DISCH KCFS	9.0	5.0	5.0	5.0	6.0	9.0	9.0	9.0	9.0	5.0	5.0	5.0	5.0	5.0	9.0	9.0	9.0		
POWER																			
AVE POWER MW		62	62	62	75	112	113	114	113	63	63	63	63	63	112	112	111		
PEAK POW MW		139	139	140	141	142	145	144	142	142	142	142	142	142	141	139	139		
ENERGY GWH	814.7	22.3	10.4	13.4	53.7	83.4	81.5	84.7	84.1	45.3	46.7	22.6	10.5	12.1	83.5	83.1	77.4		
--GARRISON--																			
NAT INFLOW	9674	445	208	267	741	1167	2771	1667	531	410	442	174	81	93	158	231	289		
DEPLETION	1042	-1	0	-1	4	194	788	615	94	-136	-2	-120	-56	-64	-116	-90	-67		
CHAN STOR	0	43			-11	-32				42	0			0	-42				
EVAPORATION	525							32	101	126	110	50	23	26	57				
REG INFLOW	13496	638	278	357	1083	1494	2519	1573	890	760	642	393	183	209	728	874	874		
RELEASE	13427	387	180	232	1071	1476	1428	1291	1291	893	738	357	167	190	1107	1353	1265		
STOR CHANGE	69	251	97	125	12	19	1090	282	-402	-133	-96	36	17	19	-379	-478	-392		
STORAGE	12591	12843	12940	13064	13077	13095	14186	14468	14066	13933	13837	13873	13890	13909	13530	13052	12660		
ELEV FTMSL	1817.2	1818.2	1818.6	1819.1	1819.2	1819.3	1823.6	1824.7	1823.1	1822.6	1822.2	1822.4	1822.4	1822.5	1821.0	1819.1	1817.5		
DISCH KCFS	21.0	13.0	13.0	13.0	18.0	24.0	24.0	21.0	21.0	15.0	12.0	12.0	12.0	12.0	18.0	22.0	22.0		
POWER																			
AVE POWER MW		142	143	143	198	264	268	239	239	170	136	136	136	136	202	243	240		
PEAK POW MW		398	399	401	401	401	417	421	415	413	412	413	413	413	408	401	395		
ENERGY GWH	1812.8	51.2	24.0	31.0	142.8	196.1	192.7	177.8	177.5	122.4	101.0	48.8	22.8	26.1	150.2	181.0	167.3		
--OAH--																			
NAT INFLOW	1547	242	113	145	214	155	327	167	77	89	18	15	7	8	-107	-12	89		
DEPLETION	681	24	11	14	49	71	145	173	116	28	-10	1	0	1	12	18	28		
CHAN STOR	-5	39			-24	-29		14		30	15				-30	-20			
EVAPORATION	466							29	90	111	97	44	20	23	51				
REG INFLOW	13822	644	282	363	1212	1531	1610	1270	1162	873	684	327	153	174	907	1303	1326		
RELEASE	13752	408	271	395	1175	1524	1408	1687	1714	939	903	226	121	136	933	1011	902		
STOR CHANGE	71	236	11	-32	37	7	202	-417	-551	-66	-219	102	32	39	-26	292	424		
STORAGE	13176	13413	13424	13392	13428	13435	13637	13220	12669	12603	12384	12486	12518	12556	12530	12822	13247		
ELEV FTMSL	1586.5	1587.6	1587.6	1587.5	1587.6	1587.6	1588.5	1586.7	1584.3	1584.1	1583.1	1583.5	1583.7	1583.9	1583.7	1585.0	1586.8		
DISCH KCFS	15.9	13.7	19.5	22.1	19.7	24.8	23.7	27.4	27.9	15.8	14.7	7.6	8.7	8.6	15.2	16.4	15.7		
POWER																			
AVE POWER MW		158	226	256	228	286	274	317	318	179	166	86	99	97	172	187	180		
PEAK POW MW		606	606	606	607	607	611	602	589	588	583	585	586	587	586	593	603		
ENERGY GWH	1908.1	57.0	38.0	55.2	164.4	213.0	197.4	235.6	236.3	129.0	123.7	30.9	16.6	18.7	127.9	139.0	125.3		
--BIG BEND--																			
EVAPORATION	129						8	24	31	27	12	6	7	14					
REG INFLOW	13623	408	271	395	1175	1524	1408	1680	1689	908	876	213	115	129	919	1011	902		
RELEASE	13623	408	271	395	1175	1524	1408	1680	1689	908	876	213	115	129	919	1011	902		
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621		
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0		
DISCH KCFS	15.9	13.7	19.5	22.1	19.7	24.8	23.7	27.3	27.5	15.3	14.2	7.2	8.3	8.2	14.9	16.4	15.7		
POWER																			
AVE POWER MW		65	92	104	92	116	111	128	129	75	72	36	42	41	75	81	75		
PEAK POW MW		517	510	509	509	509	509	509	509	538	538	538	538	538	538	538	529		
ENERGY GWH	788.5	23.4	15.4	22.4	66.6	86.3	79.8	95.1	95.7	53.8	53.5	13.1	7.1	7.9	56.0	60.1	52.4		
--FORT RANDALL--																			
NAT INFLOW	560	91	42	54	112	81	155	44	31	-25	-10	-4	-5	-5	-37	-19	50		
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	0	0	1	3	3	3		
EVAPORATION	136							10	32	36	25	10	5	5	12				
REG INFLOW	13969	497	313	448	1284	1596	1551	1696	1673	864	824	194	106	118	866	989	949		
RELEASE	13969	223	178	431	1284	1596	1551	1696	1674	1584	1357	194	106	118	713	689	575		
STOR CHANGE	0	274	135	17				0	0	-719	-533	0	0	0	153	300	374		
STORAGE	3123	3397	3532	3549	3549	3549	3549	3549	3549	2830	2297	2297	2296	2296	2449	2749	3123		
ELEV FTMSL	1350.0	1353.4	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1346.0	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0		
DISCH KCFS	9.9	7.5	12.8	24.2	21.6	26.0	26.1	27.6	27.2	26.6	22.1	6.5	7.6	7.5	11.6	11.2	10.0		
POWER																			
AVE POWER MW		62	108	204	183	219	220	232	229	216	166	48	56	55	86	86	80		
PEAK POW MW		350	355	356	356	356	356	356	356	324	284	285	285	285	297	319	339		
ENERGY GWH	1380.7	22.4	18.2	44.1	131.4	162.9	158.4	173.0	170.7	155.6	123.8	17.2	10.5	10.5	63.8	63.7	55.6		
--GAVINS POINT--																			
NAT INFLOW	1361	91	42	55	131	147	157	89	79	84	115	55	26	29	78	78	105		
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1			
CHAN STOR	-1	5	-10	-22	5	-8	0	-3	1	1	8	29	-2	0	-8	1	2		
EVAPORATION	47							3	9	11	10	5	2	2	5				
REG INFLOW	15169	319	210	465	1416	1716	1684	1740	1735	1662	1470	268	125	143	768	766	682		
RELEASE	15169	319	210	465	1416	1716	1684	1740	1722	1636	1470	268	125	143	768	766	721		
STOR CHANGE									13	26							-39		
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358		
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0		
DISCH KCFS	12.5	10.7	15.2	26.0	23.8	27.9	28.3	28.3	28.0	27.5	23.9	9.0	9.0	9.0	12.5	12.5	12.5		
POWER																			
AVE POWER MW		38	53	89	82	95	96	96	96	95	84	32	32	32	44	44	44		
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76		
ENERGY GWH	634.3	13.5	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	62.5	11.6	5.4	6.2	33.0	32.9	30.8		
--GAVINS POINT - SIOUX CITY--																			
NAT INFLOW	1212	140	65	84	162	196	104	121	87	69	40	29	14	15	11	23	52		
DEPLETION	266	7	3	4	22	36	31	39	36	24	11	6	3	3	13	14	14		
REGULATED FLOW AT SIOUX CITY																			

TIME OF STUDY 09:14:30

SHTN NAV SEAS 30 DAYS, SP MAR 5 MAY 9.7

STUDY NO 16

	28FEB12	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB
VALUES IN 1000 AF EXCEPT AS INDICATED																	
2012																	
2013																	
--FORT PECK--																	
NAT INFLOW	6537	222	103	133	528	1041	1613	724	310	278	370	180	84	96	283	240	332
DEPLETION	471	-25	-12	-15	22	289	564	234	-113	-53	-39	-18	-21	-120	-133	-90	
EVAPORATION	453							28	87	108	95	43	20	23	49		
MOD INFLOW	5613	246	115	148	506	752	1049	462	223	283	328	176	82	94	354	373	422
RELEASE	5366	149	69	89	357	523	506	523	416	307	149	69	79	553	553	500	
STOR CHANGE	247	98	45	58	149	229	543	-60	-300	-133	21	27	13	15	-200	-180	-78
STORAGE	10519	10616	10662	10720	10869	11099	11642	11581	11282	11148	11169	11197	11209	11224	11024	10844	10766
ELEV FTMSL	2209.7	2210.3	2210.6	2210.9	2211.8	2213.2	2216.4	2216.0	2214.3	2213.5	2213.6	2213.8	2213.8	2213.9	2212.7	2211.7	2211.2
DISCH KCFS	9.0	5.0	5.0	5.0	6.0	8.5	8.5	8.5	8.5	7.0	5.0	5.0	5.0	5.0	9.0	9.0	9.0
POWER																	
AVE POWER MW		62	62	62	75	106	107	108	108	88	63	63	63	63	113	112	112
PEAK POW MW		139	140	140	141	143	146	146	144	143	143	143	143	144	142	141	140
ENERGY GWH	815.9	22.3	10.4	13.4	53.9	79.1	77.4	80.5	80.1	63.5	46.9	22.7	10.6	12.1	84.1	83.6	75.2
--GARRISON--																	
NAT INFLOW	9933	457	213	274	761	1198	2845	1711	545	421	454	178	83	95	162	238	297
DEPLETION	1063	0	0	0	5	195	799	632	99	-139	-7	-124	-58	-66	-119	-92	-62
CHAN STOR	0	43			-11	-27	0	0		16	21			0	-42		
EVAPORATION	531							32	102	128	111	50	23	27	58		
REG INFLOW	13705	650	283	364	1102	1499	2552	1569	866	864	678	400	187	213	735	883	859
RELEASE	13405	387	180	232	1041	1476	1250	1291	1291	1002	799	387	180	206	1107	1353	1222
STOR CHANGE	300	263	102	132	61	23	1302	278	-425	-138	-121	13	6	7	-372	-469	-363
STORAGE	12660	12923	13025	13157	13218	13241	14543	14821	14396	14259	14138	14151	14157	14164	13792	13323	12960
ELEV FTMSL	1817.5	1818.6	1819.0	1819.5	1819.8	1819.9	1824.9	1826.0	1824.4	1823.9	1823.4	1823.4	1823.5	1823.5	1822.0	1820.2	1818.7
DISCH KCFS	22.0	13.0	13.0	13.0	17.5	24.0	21.0	21.0	21.0	16.8	13.0	13.0	13.0	13.0	18.0	22.0	22.0
POWER																	
AVE POWER MW		143	143	144	194	265	236	241	241	192	148	148	148	148	203	245	242
PEAK POW MW		399	400	402	403	404	422	426	420	418	416	417	417	417	411	405	399
ENERGY GWH	1822.8	51.3	24.1	31.1	139.3	196.9	170.0	179.4	179.1	138.3	110.3	53.3	24.9	28.4	151.3	182.4	162.8
--OAH--																	
NAT INFLOW	1698	265	124	159	235	170	359	183	85	98	20	17	8	9	-118	-13	98
DEPLETION	696	24	11	15	50	72	148	178	119	29	-11	1	0	1	13	18	28
CHAN STOR	1	44			-22	-31	14			21	19				-25	-20	0
EVAPORATION	471							29	90	112	98	44	21	24	52		
REG INFLOW	13937	672	293	377	1205	1542	1475	1267	1167	979	751	358	167	191	899	1302	1292
RELEASE	13630	397	265	387	1159	1511	1385	1680	1708	937	903	225	121	136	938	1013	865
STOR CHANGE	307	275	28	-11	46	31	90	-413	-541	43	-151	133	46	55	-38	289	427
STORAGE	13247	13521	13549	13538	13584	13615	13705	13292	12751	12794	12642	12775	12821	12876	12838	13127	13554
ELEV FTMSL	1586.8	1588.0	1588.1	1588.1	1588.3	1588.4	1588.8	1587.0	1584.7	1584.9	1584.2	1584.8	1585.0	1585.3	1585.1	1586.3	1588.1
DISCH KCFS	15.7	13.3	19.1	21.7	19.5	24.6	23.3	27.3	27.8	15.7	14.7	7.6	8.7	8.5	15.3	16.5	15.6
POWER																	
AVE POWER MW		155	222	251	226	285	271	316	317	179	167	86	100	98	174	189	180
PEAK POW MW		609	609	609	610	611	613	603	591	592	589	592	593	594	593	600	609
ENERGY GWH	1899.2	55.7	37.3	54.3	162.8	212.0	194.8	235.0	235.9	129.2	124.4	31.1	16.7	18.8	129.7	140.4	121.1
--BIG BEND--																	
EVAPORATION	129							8	24	31	27	12	6	7	14		
REG INFLOW	13501	397	265	387	1159	1511	1385	1673	1683	906	876	213	115	129	924	1013	865
RELEASE	13501	397	265	387	1159	1511	1385	1673	1683	906	876	213	115	129	924	1013	865
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
DISCH KCFS	15.7	13.3	19.1	21.7	19.5	24.6	23.3	27.2	27.4	15.2	14.2	7.2	8.3	8.1	15.0	16.5	15.6
POWER																	
AVE POWER MW		63	90	102	91	115	109	127	128	75	72	36	42	41	76	81	75
PEAK POW MW		517	510	509	509	509	509	509	509	538	538	538	538	538	538	538	529
ENERGY GWH	781.5	22.8	15.1	21.9	65.7	85.6	78.5	94.7	95.3	53.7	53.5	13.1	7.1	7.9	56.3	60.3	50.2
--FORT RANDALL--																	
NAT INFLOW	627	101	47	61	125	91	174	49	35		-28	-11	-5	-6	-42	-21	56
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3
EVAPORATION	136							10	32	36	25	10	5	5	12		
REG INFLOW	13913	497	312	447	1281	1593	1547	1694	1671	862	821	192	105	118	866	989	918
RELEASE	13913	423	177	430	1281	1593	1547	1694	1672	1582	1354	192	105	118	713	689	544
STOR CHANGE	0	274	135	17				0	0	-719	-533	0	0	0	153	300	374
STORAGE	3123	3397	3532	3549	3549	3549	3549	3549	3549	2830	2297	2297	2296	2296	2449	2749	3123
ELEV FTMSL	1350.0	1353.4	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1346.0	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0
DISCH KCFS	10.0	7.5	12.7	24.1	21.5	25.9	26.0	27.5	27.2	26.6	22.0	6.5	7.6	7.4	11.6	11.2	9.8
POWER																	
AVE POWER MW		62	108	203	182	219	219	232	229	216	166	47	56	54	86	86	78
PEAK POW MW		350	355	356	356	356	356	356	356	324	284	285	285	285	297	319	339
ENERGY GWH	1375.3	22.4	18.1	43.9	131.1	162.6	158.0	172.8	170.5	155.4	123.5	17.1	9.3	10.4	63.8	63.7	52.6
--GAVINS POINT--																	
NAT INFLOW	1394	93	44	56	134	150	161	91	86	118	57	26	30	30	80	80	107
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1	15
CHAN STOR	-1	5	-10	-22	5	-8	0	-3	1	1	8	29	-2	0	-8	1	3
EVAPORATION	47							3	9	11	10	5	2	2	5		
REG INFLOW	15147	322	211	464	1416	1716	1684	1740	1735	1662	1470	268	125	143	770	768	654
RELEASE	15147	322	211	464	1416	1716	1684	1740	1722	1636	1470	268	125	143	770	768	693
STOR CHANGE									13	26							-39
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0
DISCH KCFS	12.5	10.8	15.2	26.0	23.8	27.9	28.3	28.3	28.0	27.5	23.9	9.0	9.0	9.0	12.5	12.5	12.5
POWER																	
AVE POWER MW		38	53	89	82	95	96	96	96	95	84	32	32	32	44	44	44
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76
ENERGY GWH	633.4	13.7	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	62.5	11.6	5.4	6.2	33.1	33.0	29.6
--GAVINS POINT - SIOUX CITY--																	
NAT INFLOW	1311	151	70	91	175	212	112	131	94	75	44	31	14	17	13	25	56
DEPLETION	268	7	3	4	22	36	31	39	37	24	11	6	3	3	13	14	15
REGULATED FLOW AT SIOUX CITY																	
KAF	16190	466	278	551	1569	1892	1765	1832	1779	1687	1503	293	137	156	770	779	734
KCFS		15.7	20.0	30.9	26.4	30.8	29.7	29									

TIME OF STUDY 09:14:30

SHTN NAV SEAS 29 DAYS, SP MAR 5 MAY 9.9

STUDY NO 17

VALUES IN 1000 AF EXCEPT AS INDICATED

	29FEB13	2013													2014						
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB				
--FORT PECK--																					
NAT INFLOW	6841	232	108	139	553	1089	1687	758	325	291	388	188	88	100	296	251	348				
DEPLETION	478	-26	-12	-15	21	290	568	241	4	-113	-55	-40	-19	-21	-121	-134	-90				
EVAPORATION	466							28	89	112	97	44	21	24	51						
MOD INFLOW	5897	257	120	154	532	799	1119	489	232	292	346	184	86	98	366	385	438				
RELEASE	5362	149	69	89	357	523	506	523	523	412	307	149	69	79	553	553	500				
STOR CHANGE	535	109	51	65	175	276	613	-34	-291	-120	38	35	16	19	-187	-168	-62				
STORAGE	10766	10875	10925	10990	11165	11442	12055	12021	11730	11610	11648	11683	11700	11718	11531	11363	11301				
ELEV FTMSL	2211.2	2211.9	2212.2	2212.5	2213.6	2215.2	2218.7	2218.5	2216.9	2216.2	2216.4	2216.6	2216.7	2216.8	2215.7	2214.7	2214.4				
DISCH KCFS	9.0	5.0	5.0	5.0	6.0	8.5	8.5	8.5	8.5	6.9	5.0	5.0	5.0	5.0	9.0	9.0	9.0				
POWER																					
AVE POWER MW		62	63	63	75	107	109	109	109	88	64	64	64	64	115	114	114				
PEAK POW MW		141	142	142	143	145	149	149	147	146	146	147	147	147	146	144	144				
ENERGY GWH	825.2	22.5	10.5	13.5	54.3	79.8	78.2	81.4	81.1	63.7	47.5	23.0	10.8	12.3	85.2	84.8	76.4				
--GARRISON--																					
NAT INFLOW	10335	476	222	285	792	1247	2960	1780	567	438	472	186	87	99	169	247	309				
DEPLETION	1075	0	0	0	5	194	808	648	105	-142	-12	-128	-60	-68	-120	-92	-63				
CHAN STOR	0	43			-11	-27	0	0		16	20			0	-42						
EVAPORATION	546							33	105	131	114	52	24	28	59						
REG INFLOW	14077	668	292	375	1133	1549	2658	1621	880	876	697	410	191	219	741	892	872				
RELEASE	13424	446	194	250	1012	1476	1250	1291	1291	959	799	387	180	206	1107	1353	1222				
STOR CHANGE	653	222	97	125	122	73	1408	330	-412	-82	-102	23	11	12	-365	-460	-350				
STORAGE	12960	13182	13279	13404	13525	13599	15007	15337	14925	14844	14742	14765	14776	14788	14423	13963	13613				
ELEV FTMSL	1818.7	1819.6	1820.0	1820.5	1821.0	1821.3	1826.7	1827.9	1826.4	1826.1	1825.7	1825.8	1825.8	1825.9	1824.5	1822.7	1821.3				
DISCH KCFS	22.0	15.0	14.0	14.0	17.0	24.0	21.0	21.0	21.0	16.1	13.0	13.0	13.0	13.0	18.0	22.0	22.0				
POWER																					
AVE POWER MW		166	155	156	190	267	239	244	244	187	150	150	150	150	207	249	247				
PEAK POW MW		403	404	406	408	409	429	433	427	426	425	425	425	425	420	414	409				
ENERGY GWH	1849.0	59.6	26.1	33.7	136.4	198.7	171.9	181.6	181.4	134.4	111.9	54.1	25.3	28.9	153.8	185.5	165.7				
--OAH--																					
NAT INFLOW	1957	306	143	183	271	195	414	211	98	113	23	19	9	10	-135	-15	113				
DEPLETION	709	24	11	15	50	73	151	182	122	30	-11	1	0	1	13	18	29				
CHAN STOR	1	34	5		-14	-33	14			24	15				-24	-19	0				
EVAPORATION	491							30	94	117	102	46	22	25	54						
REG INFLOW	14181	762	331	419	1218	1565	1527	1290	1173	948	746	358	167	191	881	1300	1306				
RELEASE	13512	379	255	374	1130	1488	1346	1669	1700	934	942	235	120	136	940	1017	850				
STOR CHANGE	670	383	76	45	88	77	181	-379	-527	15	-195	123	47	55	-59	284	456				
STORAGE	13554	13937	14013	14058	14146	14223	14403	14025	13498	13513	13317	13441	13488	13543	13484	13768	14224				
ELEV FTMSL	1588.1	1589.7	1590.0	1590.2	1590.6	1590.9	1591.6	1590.1	1587.9	1588.0	1587.1	1587.7	1587.9	1588.1	1587.9	1589.0	1590.9				
DISCH KCFS	15.6	12.7	18.4	20.9	19.0	24.2	22.6	27.1	27.6	15.7	15.3	7.9	8.7	8.6	15.3	16.5	15.3				
POWER																					
AVE POWER MW		149	215	246	223	285	267	319	321	182	177	92	101	100	177	192	180				
PEAK POW MW		617	619	620	622	623	627	619	608	608	604	607	608	609	608	614	623				
ENERGY GWH	1912.3	53.5	36.2	53.1	160.8	211.7	192.2	237.3	239.2	131.2	132.0	33.0	16.9	19.1	132.0	143.2	120.8				
--BIG BEND--																					
EVAPORATION	129						8	24	31	27	12	6	7	14							
REG INFLOW	13383	379	255	374	1130	1488	1346	1661	1675	903	915	223	114	129	925	1017	850				
RELEASE	13383	379	255	374	1130	1488	1346	1661	1675	903	915	223	114	129	925	1017	850				
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621				
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0				
DISCH KCFS	15.6	12.7	18.4	20.9	19.0	24.2	22.6	27.0	27.2	15.2	14.9	7.5	8.2	8.1	15.0	16.5	15.3				
POWER																					
AVE POWER MW		60	86	98	89	113	106	126	128	74	75	38	42	41	76	81	73				
PEAK POW MW		517	510	509	509	509	509	509	509	538	538	538	538	538	538	538	529				
ENERGY GWH	775.0	21.7	14.5	21.2	64.0	84.3	76.3	94.1	94.9	53.5	55.8	13.7	7.0	7.9	56.4	60.5	49.3				
--FORT RANDALL--																					
NAT INFLOW	744	120	56	72	149	108	207	58	41	83	122	59	27	31	83	83	111				
DEPLETION	79	1	1	1	3	9	12	18	15	7	-33	-13	-6	-7	-50	-25	66				
EVAPORATION	136							10	32	36	25	10	5	5	12						
REG INFLOW	13913	497	310	445	1276	1587	1541	1691	1669	859	855	200	103	117	860	989	913				
RELEASE	13913	223	176	428	1276	1587	1541	1691	1670	1578	1388	200	103	117	707	689	539				
STOR CHANGE	0	274	135	17			0	0	-719	-533	0	0	0	0	153	300	374				
STORAGE	3123	3397	3532	3549	3549	3549	3549	3549	3549	2830	2297	2297	2296	2296	2449	2749	3123				
ELEV FTMSL	1350.0	1353.4	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1346.0	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0				
DISCH KCFS	9.8	7.5	12.7	24.0	21.4	25.8	25.9	27.5	27.2	26.5	22.6	6.7	7.5	7.3	11.5	11.2	9.7				
POWER																					
AVE POWER MW		62	107	202	181	218	219	232	229	215	170	49	55	54	85	86	78				
PEAK POW MW		350	355	356	356	356	356	356	356	324	284	285	285	285	297	319	339				
ENERGY GWH	1375.0	22.4	17.9	43.7	130.6	162.0	157.4	172.5	170.3	155.1	126.5	17.8	9.2	10.4	63.3	63.7	52.1				
--GAVINS POINT--																					
NAT INFLOW	1444	97	45	58	139	156	167	94	83	89	122	59	27	31	83	83	111				
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1					
CHAN STOR	-1	4	-10	-22	5	-8	0	-3	1	1	7	29	-1	0	-8	1	3				
EVAPORATION	47							3	9	11	10	5	2	2	5						
REG INFLOW	15196	325	211	464	1416	1716	1684	1740	1735	1662	1506	278	125	143	767	771	652				
RELEASE	15196	325	211	464	1416	1716	1684	1740	1722	1636	1506	278	125	143	767	771	691				
STOR CHANGE								13	26	397	397	397	397	397	397	397	358				
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358				
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0				
DISCH KCFS	12.5	10.9	15.2	26.0	23.8	27.9	28.3	28.3	28.0	27.5	24.5	9.3	9.0	9.0	12.5	12.5	12.5				
POWER																					
AVE POWER MW		38	53	89	82	95	96	96	96	95	86	33	32	32	44	45	44				
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76				
ENERGY GWH	635.4	13.8	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	64.0	12.0	5.4	6.2	33.0	33.2	29.5				
--GAVINS POINT - SIOUX CITY--																					
NAT INFLOW	1479	170	79	102	197	240	127	148	106	85	49	35	16	19	14	28	63				
DEPLETION	270	7	3	4	23	36	31														

	28FEB14		2014											2015				
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	7200	244	114	146	582	1146	1776	798	342	306	408	198	92	106	312	264	366	
DEPLETION	486	-26	-12	-16	21	290	572	248	8	-114	-57	-41	-19	-22	-122	-134	-91	
EVAPORATION	481							29	92	115	101	46	21	24	53			
MOD INFLOW	6233	270	126	162	561	856	1204	521	242	305	364	193	90	103	381	398	457	
RELEASE	5472	149	69	89	357	492	536	553	553	311	338	164	76	87	584	584	528	
STOR CHANGE	761	121	57	73	204	364	668	-33	-311	-7	26	29	14	15	-203	-186	-71	
STORAGE	11301	11422	11479	11551	11755	12119	12788	12755	12444	12437	12463	12493	12506	12522	12339	12133	12062	
ELEV FTMSL	2214.4	2215.1	2215.4	2215.8	2217.0	2219.1	2222.8	2222.6	2220.9	2220.8	2221.0	2221.1	2221.2	2221.3	2220.2	2219.1	2218.7	
DISCH KCFS	9.0	5.0	5.0	5.0	6.0	8.0	9.0	9.0	9.0	5.2	5.5	5.5	5.5	5.5	9.5	9.5	9.5	
POWER																		
AVE POWER MW		63	64	64	77	103	117	118	117	68	72	72	72	72	123	123	122	
PEAK POW MW		145	145	146	147	149	153	153	151	151	151	152	152	152	151	149	149	
ENERGY GWH	858.0	22.8	10.7	13.8	55.2	76.5	84.3	87.8	87.4	49.1	53.4	25.8	12.1	13.8	91.8	91.4	82.3	
--GARRISON--																		
NAT INFLOW	10800	497	232	298	828	1303	3093	1861	593	458	493	194	90	103	176	258	329	
DEPLETION	1073				6	194	818	664	110	-145	-16	-131	-61	-70	-128	-99	-69	
CHAN STOR	-5	43			-11	-21	-11			39	-3		0	0	-41			
EVAPORATION	567							34	108	136	119	54	25	29	62			
REG INFLOW	14627	688	301	387	1168	1580	2800	1716	928	817	726	434	203	232	785	941	920	
RELEASE	13728	446	194	250	1012	1476	1369	1414	1414	781	799	387	180	206	1107	1414	1277	
STOR CHANGE	899	242	107	137	157	104	1431	302	-486	36	-74	48	22	25	-322	-473	-358	
STORAGE	13613	13855	13962	14099	14256	14360	15792	16093	15607	15643	15569	15617	15639	15665	15343	14870	14512	
ELEV FTMSL	1821.3	1822.3	1822.7	1823.2	1823.8	1824.2	1829.6	1830.6	1828.9	1829.0	1828.7	1828.9	1829.0	1829.1	1827.9	1826.2	1824.8	
DISCH KCFS	22.0	15.0	14.0	14.0	17.0	24.0	23.0	23.0	23.0	13.1	13.0	13.0	13.0	13.0	18.0	23.0	23.0	
POWER																		
AVE POWER MW		169	158	159	193	272	266	272	271	155	153	153	154	154	211	267	264	
PEAK POW MW		412	414	416	418	420	439	443	437	437	436	437	437	437	433	427	422	
ENERGY GWH	1928.7	60.7	26.6	34.3	139.1	202.7	191.8	202.4	201.9	111.7	114.2	55.2	25.8	29.5	157.2	198.4	177.3	
--OAHE--																		
NAT INFLOW	2300	360	168	216	318	230	486	248	115	133	27	22	10	12	-159	-18	133	
DEPLETION	724	25	12	15	51	75	154	187	125	30	-12	1	0	1	13	19	29	
CHAN STOR	-5	33	5		-14	-32	5			45	1				-23	-23		
EVAPORATION	520							32	101	126	108	48	23	26	56			
REG INFLOW	14779	814	355	451	1265	1599	1705	1443	1303	804	731	359	168	192	855	1354	1381	
RELEASE	13860	485	124	339	1094	1460	1297	1653	1688	1151	1035	496	98	139	950	1016	836	
STOR CHANGE	919	329	231	111	171	139	408	-210	-385	-347	-305	-137	70	53	-94	338	546	
STORAGE	14224	14553	14784	14896	15066	15205	15613	15403	15019	14672	14367	14231	14300	14353	14259	14597	15143	
ELEV FTMSL	1590.9	1592.2	1593.1	1593.6	1594.2	1594.8	1596.3	1595.5	1594.0	1592.7	1591.5	1590.9	1591.2	1591.4	1591.0	1592.4	1594.5	
DISCH KCFS	15.3	16.3	8.9	19.0	18.4	23.7	21.8	26.9	27.4	19.3	16.8	16.7	7.1	8.8	15.4	16.5	15.0	
POWER																		
AVE POWER MW		193	107	227	221	285	264	325	330	231	200	197	84	104	183	196	180	
PEAK POW MW		630	634	636	640	642	650	646	639	632	626	623	625	626	624	630	641	
ENERGY GWH	2007.6	69.5	17.9	49.1	158.8	212.2	189.7	241.8	245.4	166.5	148.8	71.0	14.1	19.9	135.9	145.7	121.1	
--BIG BEND--																		
EVAPORATION	129							8	24	31	27	12	6	7	14			
REG INFLOW	13731	485	124	339	1094	1460	1297	1645	1663	1120	1008	484	93	132	935	1016	836	
RELEASE	13731	485	124	339	1094	1460	1297	1645	1663	1120	1008	484	93	132	935	1016	836	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	15.3	16.3	8.9	19.0	18.4	23.7	21.8	26.8	27.0	18.8	16.4	16.3	6.7	8.3	15.2	16.5	15.0	
POWER																		
AVE POWER MW		76	42	89	86	111	102	125	127	91	83	82	34	42	77	81	72	
PEAK POW MW		510	509	509	509	509	509	509	509	532	538	538	538	538	538	538	529	
ENERGY GWH	795.4	27.5	7.0	19.2	62.0	82.7	73.5	93.2	94.2	65.4	61.4	29.5	5.7	8.1	57.0	60.4	48.5	
--FORT RANDALL--																		
NAT INFLOW	900	145	68	87	180	130	250	70	50		-40	-15	-7	-8	-60	-30	80	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3		
EVAPORATION	140							10	32	37	27	11	5	5	12			
REG INFLOW	14412	629	191	426	1271	1581	1535	1687	1667	1075	939	457	81	118	860	983	913	
RELEASE	14412	220	174	426	1271	1581	1535	1687	1667	1575	1548	600	81	119	707	683	539	
STOR CHANGE	0	409	17					0	0	-500	-609	-143	0	0	153	300	374	
STORAGE	3123	3532	3549	3549	3549	3549	3549	3549	3549	3049	2440	2297	2297	2296	2449	2749	3123	
ELEV FTMSL	1350.0	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1349.0	1340.0	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0	
DISCH KCFS	9.7	7.4	12.5	23.8	21.4	25.7	25.8	27.4	27.1	26.5	25.2	20.2	5.9	7.5	11.5	11.1	9.7	
POWER																		
AVE POWER MW		62	107	201	181	217	218	231	229	218	194	148	43	55	85	85	78	
PEAK POW MW		355	356	356	356	356	356	356	356	336	296	285	285	285	297	319	338	
ENERGY GWH	1424.9	22.3	17.9	43.5	130.1	161.4	156.8	172.1	170.0	156.8	144.4	53.3	7.2	10.5	63.3	63.2	52.1	
--GAVINS POINT--																		
NAT INFLOW	1500	101	47	60	144	162	173	98	86	92	127	61	28	32	87	87	119	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	4	-10	-22	5	-8	0	-3	1	1	2	9	27	-3	-7	1		
EVAPORATION	47							3	9	11	10	5	2	2	5			
REG INFLOW	15752	326	211	464	1416	1716	1684	1740	1735	1662	1666	661	132	143	771	769	658	
RELEASE	15752	326	211	464	1416	1716	1684	1740	1722	1636	1666	661	132	143	771	769	695	
STOR CHANGE									13	26							-39	
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	12.5	10.9	15.2	26.0	23.8	27.9	28.3	28.3	28.0	27.5	27.1	22.2	9.5	9.0	12.5	12.5	12.5	
POWER																		
AVE POWER MW		38	53	89	82	95	96	96	96	95	95	78	34	32	45	44	44	
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	77	
ENERGY GWH	658.8	13.8	8.9	19.2	58.7	70.7	69.3	71.6	71.3	68.7	70.6	28.1	5.7	6.2	33.2	33.1	29.4	
--GAVINS POINT - SIOUX CITY--																		
NAT INFLOW	1700		91	118	227	275	146	170	121	97	57	41	19	22	16	32	77	
DEPLETION	276		3	4	23	36	32	39	38	25	11	7	3	3	14	15	19	
REGULATED FLOW AT SIOUX CITY																		
KAF	17176		299	578	1620	1955	1798	1871	1805	1708	1712	695	147	161	773	786	753	
KCFS		17.3	21.6	32.4	27.2	31.8	30.2	30.4	29.3	28.7	27.8	23.3	10.6	10.1	12.6	12.8	13.0	
--TOTAL--																		
NAT INFLOW	24400	1543	719	925	2279	3246	5924	3245	1307	1086	1072	500	233	266	372	593	1099	
DEPLETION	2750	7	3	4	108	623	161											

TIME OF STUDY 09:30:05

SHTN NAV SEAS 30 DAYS, SP MAR 0 MAY 9.0

STUDY NO 19

VALUES IN 1000 AF EXCEPT AS INDICATED

	28FEB10	2010										2011						
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB	
--FORT PECK--																		
NAT INFLOW	5527	198	93	119	481	865	1223	624	276	251	328	161	75	86	235	215	297	
DEPLETION	372	-7	-3	-4	59	196	358	233	12	-94	-72	-17	-8	-9	-101	-114	-56	
EVAPORATION	421							26	82	101	88	40	18	21	45			
MOD INFLOW	4734	206	96	123	422	669	865	365	182	244	312	138	65	74	291	329	353	
RELEASE	5599	149	69	89	387	430	536	553	500	369	179	83	95	553	553	500		
STOR CHANGE	-866	57	27	34	35	239	329	-189	-371	-256	-57	-40	-19	-21	-263	-224	-147	
STORAGE	9851	9908	9934	9968	10003	10242	10571	10383	10012	9756	9699	9659	9640	9619	9356	9132	8985	
ELEV FTMSL	2205.6	2205.9	2206.1	2206.3	2206.5	2208.0	2210.0	2208.9	2206.6	2205.0	2204.6	2204.3	2204.2	2204.1	2202.4	2200.9	2199.9	
DISCH KCFS	8.0	5.0	5.0	5.0	6.5	7.0	9.0	9.0	9.0	8.4	6.0	6.0	6.0	6.0	9.0	9.0	9.0	
POWER																		
AVE POWER MW		61	61	61	79	85	111	111	110	102	72	72	72	72	107	107	106	
PEAK POW MW		134	135	135	135	137	139	138	135	133	133	133	133	132	130	129	128	
ENERGY GWH	818.9	21.8	10.2	13.1	56.9	63.6	79.6	82.5	81.8	73.2	53.8	26.0	12.1	13.9	79.9	79.3	71.1	
--GARRISON--																		
NAT INFLOW	7739	382	178	229	601	1103	2306	1129	377	167	408	155	72	82	141	141	267	
DEPLETION	1051	21	10	13	51	109	717	578	106	-128	-5	-103	-48	-55	-98	-71	-46	
CHAN STOR	-11	33			-16	-5	-22			6	26				-33			
EVAPORATION	486							30	94	117	101	46	21	24	52			
REG INFLOW	11791	543	238	306	920	1419	2103	1074	730	685	707	390	182	208	707	765	813	
RELEASE	12836	357	167	214	1012	1168	1250	1291	1291	1070	738	357	167	190	1107	1291	1166	
STOR CHANGE	-1045	186	71	92	-91	251	853	-217	-561	-385	-31	33	16	18	-399	-526	-353	
STORAGE	11838	12023	12095	12186	12095	12346	13199	12982	12420	12036	12005	12038	12054	12072	11672	11146	10793	
ELEV FTMSL	1814.0	1814.8	1815.1	1815.5	1815.1	1816.2	1819.7	1818.8	1816.5	1814.9	1814.8	1814.9	1815.0	1815.0	1813.3	1811.0	1809.4	
DISCH KCFS	21.0	12.0	12.0	12.0	17.0	19.0	21.0	21.0	21.0	18.0	12.0	12.0	12.0	12.0	18.0	21.0	21.0	
POWER																		
AVE POWER MW		128	129	129	182	204	229	231	229	193	129	129	129	129	191	220	216	
PEAK POW MW		385	386	388	386	390	403	400	391	385	385	385	386	386	380	371	365	
ENERGY GWH	1664.7	46.2	21.7	27.9	131.4	151.8	164.9	171.9	170.0	139.2	95.8	46.4	21.6	24.8	142.4	163.4	145.3	
--OAH--																		
NAT INFLOW	1181	201	94	121	175	118	262	128	51	67	5	8	4	4	-103	-20	67	
DEPLETION	666	24	11	14	49	70	142	169	112	27	-10	1	0	1	12	17	27	
CHAN STOR	0	45			-25	-10	-10			16	32				-32	-16		
EVAPORATION	412						26	80	98	86	39	18	21	21	45			
REG INFLOW	12939	580	249	321	1112	1206	1359	1224	1151	1028	699	325	152	173	915	1238	1206	
RELEASE	14010	427	276	370	1216	1549	1456	1712	1742	963	923	246	125	141	944	1025	895	
STOR CHANGE	-1071	153	-26	-49	-103	-343	-97	-488	-591	65	-224	79	27	32	-29	213	311	
STORAGE	12403	12556	12530	12480	12377	12034	11937	11449	10858	10923	10699	10778	10805	10837	10808	11021	11332	
ELEV FTMSL	1583.2	1583.9	1583.7	1583.5	1583.0	1581.5	1581.0	1578.7	1575.8	1576.2	1575.0	1575.4	1575.6	1575.7	1575.6	1576.7	1578.2	
DISCH KCFS	16.2	14.3	19.9	20.7	20.4	25.2	24.5	27.8	28.3	16.2	15.0	8.3	9.0	8.9	15.4	16.7	16.1	
POWER																		
AVE POWER MW		162	225	234	230	282	272	307	307	175	162	89	97	96	166	180	176	
PEAK POW MW		587	586	585	583	574	572	560	545	546	540	543	543	544	543	549	557	
ENERGY GWH	1863.5	58.5	37.7	50.6	165.9	209.7	196.0	228.2	228.4	125.8	120.4	32.1	16.3	18.5	123.2	134.1	118.1	
--BIG BEND--																		
EVAPORATION	129						8	24	31	27	12	6	7	14				
REG INFLOW	13881	427	276	370	1216	1549	1456	1704	1717	932	896	234	119	135	930	1025	895	
RELEASE	13881	427	276	370	1216	1549	1456	1704	1717	932	896	234	119	135	930	1025	895	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	16.2	14.3	19.9	20.7	20.4	25.2	24.5	27.7	27.9	15.7	14.6	7.9	8.6	8.5	15.1	16.7	16.1	
POWER																		
AVE POWER MW		68	93	97	96	118	115	130	131	77	73	40	44	43	76	82	77	
PEAK POW MW		518	510	509	509	509	509	509	509	538	538	538	538	538	538	538	529	
ENERGY GWH	803.4	24.4	15.6	21.0	68.9	87.8	82.5	96.5	97.3	55.2	54.7	14.3	7.3	8.3	56.7	61.0	52.0	
--FORT RANDALL--																		
NAT INFLOW	368	71	33	43	90	63	121	26	16	-11	-32	-13	-6	-7	-42	-21	37	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3		
EVAPORATION	136						10	32	36	25	10	5	5	5	12			
REG INFLOW	14035	497	308	412	1303	1603	1565	1702	1687	877	837	210	108	122	872	1001	929	
RELEASE	14034	235	161	395	1303	1603	1565	1702	1687	1597	1370	210	108	122	719	701	555	
STOR CHANGE	0	262	147	17			0	0	0	-719	-533	0	0	0	153	300	374	
STORAGE	3123	3385	3532	3549	3549	3549	3549	3549	3549	2830	2297	2297	2296	2296	2449	2749	3123	
ELEV FTMSL	1350.0	1353.2	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1355.2	1346.0	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0	
DISCH KCFS	10.0	7.9	11.6	22.1	21.9	26.1	26.3	27.7	27.4	26.8	22.3	7.1	7.8	7.7	11.7	11.4	10.0	
POWER																		
AVE POWER MW		66	98	187	185	220	222	233	231	218	168	52	57	56	87	87	80	
PEAK POW MW		350	355	356	356	356	356	356	356	324	284	285	285	285	297	319	339	
ENERGY GWH	1386.7	23.6	16.4	40.4	133.3	163.7	159.8	173.6	172.1	156.8	124.9	18.7	9.6	10.8	64.4	64.9	53.7	
--GAVINS POINT--																		
NAT INFLOW	1223	84	39	50	117	133	143	82	66	71	102	49	23	26	71	71	97	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	4	-7	-20	0	-8	0	-3	0	1	8	28	-1	0	-7	1	3	
EVAPORATION	47						3	9	11	10	5	2	2	2	5			
REG INFLOW	15097	323	193	425	1416	1709	1684	1740	1735	1662	1470	277	125	143	768	772	655	
RELEASE	15097	323	193	425	1416	1709	1684	1740	1722	1636	1470	277	125	143	768	772	694	
STOR CHANGE							13	26	13	26					-39			
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358	
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0	
DISCH KCFS	12.5	10.9	13.9	23.8	23.8	27.8	28.3	28.3	28.0	27.5	23.9	9.3	9.0	9.0	12.5	12.5	12.5	
POWER																		
AVE POWER MW		38	49	82	82	95	96	96	96	95	84	33	32	32	44	45	44	
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76	
ENERGY GWH	631.4	13.7	8.2	17.6	58.7	70.4	69.3	71.6	71.3	68.7	62.5	12.0	5.4	6.2	33.0	33.2	29.6	
--GAVINS POINT - SIOUX CITY--																		
NAT INFLOW	762	95	44	57	98	131	71	76	44	38	27	19	9	10	5	16	22	
DEPLETION	263	7	3	4	22	35	31	38	36	24	10	6	3	3	13	14	14	
REGULATED FLOW AT SIOUX CITY																		
KAF	15596	411	234	478	1492	1805	1724	1778	1730	1650	1487	290	131	150	760	774	702	
KCFS		13.8	16.9	26.8	25.1	29.4	29.0	28.9	28.1	27.7	24.2	9.8	9.4	9.4	12.4	12.6	12.6	
--TOTAL--																		
NAT INFLOW	16800	1032	481	619	1562	2413	4126	2065	830	583	838	378	176	201	307	402	787	
DEPLETION	2543	45	21	27	188	438	1284	1075	291	-169	-75	-107	-50	-57	-161	-150	-58	
CHAN STOR	-12	82	-7	-20	-41	-24	-32	-3	0	24	66	29	-1	0	-72	-16	3	
EVAPORATION	1631						103	320	395	337	151	70	80	174				
STORAGE	39193	39850	40069	40163	40004	40150	41235											

DATE OF STUDY 12/28/08

2008-2009 AOP EXTENSIONS, LOWER DECILE RUNOFF SIMULATION 99001 9901 9901 PAGE 1

TIME OF STUDY 09:30:05

SHTN NAV SEAS 41 DAYS, SP MAR 0 MAY 0 STUDY NO 20

		VALUES IN 1000 AF EXCEPT AS INDICATED																
28FEB11		2011										2012						
INI-SUM		15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	29FEB	
--FORT PECK--																		
NAT INFLOW	5589	200	93	120	486	875	1237	631	280	254	331	163	76	87	238	217	300	
DEPLETION	526	-2	-1	-1	75	294	487	208	-16	-126	-64	-25	-12	-13	-91	-105	-81	
EVAPORATION	400							25	77	96	83	38	18	20	43			
MOD INFLOW	4663	203	95	122	411	581	750	398	219	284	312	150	70	80	286	322	381	
RELEASE	5251	149	69	89	387	492	476	492	492	466	307	149	69	79	523	523	489	
STOR CHANGE	-588	54	25	32	24	89	274	-94	-273	-182	4	1	1	1	-237	-201	-108	
STORAGE	8985	9039	9064	9096	9121	9210	9484	9390	9117	8935	8939	8941	8941	8942	8705	8504	8396	
ELEV FTMSL	2199.9	2200.3	2200.5	2200.7	2200.8	2201.4	2203.2	2202.6	2200.8	2199.6	2199.6	2199.6	2199.6	2199.7	2198.1	2196.7	2195.9	
DISCH KCFS	9.0	5.0	5.0	5.0	6.5	8.0	8.0	8.0	8.0	7.8	5.0	5.0	5.0	5.0	8.5	8.5	8.5	
POWER																		
AVE POWER MW		59	59	59	77	95	95	95	95	92	59	59	59	59	99	98	98	
PEAK POW MW		128	128	129	129	129	131	131	129	127	127	127	127	127	125	123	122	
ENERGY GWH	746.6	21.2	9.9	12.8	55.3	70.3	68.5	71.0	70.5	66.3	43.7	21.2	9.9	11.3	73.8	73.1	67.9	
--GARRISON--																		
NAT INFLOW	7910	391	182	234	615	1128	2357	1154	385	171	417	158	74	84	144	144	273	
DEPLETION	1051	21	10	13	51	109	717	578	106	-128	-5	-103	-48	-55	-98	-71	-46	
CHAN STOR	6	45			-17	-17				2	31			0	-39		0	
EVAPORATION	466							29	91	112	97	44	20	23	50			
REG INFLOW	11650	563	242	311	934	1494	2116	1039	680	655	664	366	171	195	676	738	808	
RELEASE	12366	387	180	232	893	1199	1160	1199	1199	979	769	372	174	198	1045	1230	1150	
STOR CHANGE	-716	176	61	79	42	295	956	-160	-519	-324	-105	-6	-3	-3	-369	-492	-342	
STORAGE	10793	10969	11030	11109	11150	11445	12401	12241	11722	11397	11293	11287	11284	11280	10911	10419	10076	
ELEV FTMSL	1809.4	1810.2	1810.5	1810.8	1811.0	1812.3	1816.4	1815.8	1813.5	1812.1	1811.7	1811.6	1811.6	1811.6	1809.9	1807.7	1806.0	
DISCH KCFS	21.0	13.0	13.0	13.0	15.0	19.5	19.5	19.5	19.5	16.5	12.5	12.5	12.5	12.5	17.0	20.0	20.0	
POWER																		
AVE POWER MW		134	135	135	156	203	207	210	208	173	131	131	131	131	176	204	201	
PEAK POW MW		368	369	371	371	376	391	388	380	375	374	373	373	373	367	359	353	
ENERGY GWH	1563.5	48.3	22.7	29.2	112.4	151.3	149.4	156.3	154.7	124.9	97.7	47.2	22.0	25.2	131.2	151.6	139.6	
--OAHE--																		
NAT INFLOW	1196	204	95	122	177	119	265	130	52	68	5	8	4	4	-104	-21	68	
DEPLETION	682	24	11	14	49	71	145	173	116	28	-10	1	0	1	12	18	29	
CHAN STOR	6	42			-10	-24				17	22			-25	-17			
EVAPORATION	387							24	74	92	81	37	17	20	43			
REG INFLOW	12499	609	264	340	1010	1223	1280	1132	1061	944	725	342	160	182	862	1174	1189	
RELEASE	13232	456	240	368	1213	1426	1456	1711	1391	1040	523	258	125	142	945	1020	920	
STOR CHANGE	-733	153	25	-28	-203	-202	-176	-579	-329	-96	203	84	35	41	-83	154	269	
STORAGE	11332	11485	11510	11482	11279	11077	10901	10321	9992	9896	10099	10182	10217	10258	10175	10329	10598	
ELEV FTMSL	1578.2	1578.9	1579.0	1578.9	1577.9	1576.9	1576.1	1573.1	1571.4	1570.9	1571.9	1572.4	1572.6	1572.8	1572.3	1573.1	1574.5	
DISCH KCFS	16.1	15.3	17.3	20.6	20.4	23.2	24.5	27.8	22.6	17.5	8.5	8.7	9.0	8.9	15.4	16.6	16.0	
POWER																		
AVE POWER MW		168	190	226	223	252	264	297	238	183	89	92	95	95	162	175	170	
PEAK POW MW		561	561	561	556	551	546	530	521	519	524	527	527	529	526	531	538	
ENERGY GWH	1713.1	60.5	31.9	48.9	160.7	187.5	190.3	220.6	177.0	131.8	66.5	33.1	16.0	18.2	120.9	130.6	118.6	
--BIG BEND--																		
EVAPORATION	129							8	24	31	27	12	6	7	14			
REG INFLOW	13104	456	240	368	1213	1426	1456	1703	1366	1010	495	246	119	135	931	1020	920	
RELEASE	13104	456	240	368	1213	1426	1456	1703	1366	1010	495	246	119	135	931	1020	920	
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	
DISCH KCFS	16.1	15.3	17.3	20.6	20.4	23.2	24.5	27.7	22.2	17.0	8.1	8.3	8.6	8.5	15.1	15.6	16.0	
POWER																		
AVE POWER MW		73	81	97	95	109	115	130	106	85	41	42	43	43	76	82	77	
PEAK POW MW		517	510	509	509	509	509	509	525	538	538	538	538	538	538	538	529	
ENERGY GWH	760.5	26.1	13.6	20.9	68.7	80.8	82.5	96.5	78.7	60.9	30.4	15.1	7.3	8.3	56.7	60.7	53.4	
--FORT RANDALL--																		
NAT INFLOW	378	73	34	44	92	65	124	27	16	-11	-32	-14	-6	-7	-43	-22	38	
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3	
EVAPORATION	130							10	30	33	24	10	5	5	12			
REG INFLOW	13272	527	273	411	1302	1482	1568	1702	1337	959	438	221	107	122	873	995	955	
RELEASE	13271	232	160	394	1302	1482	1568	1702	1686	1596	704	221	107	122	719	695	581	
STOR CHANGE	1	295	113	17				0	-349	-637	-266	0	0	0	153	300	374	
STORAGE	3123	3419	3532	3549	3549	3549	3549	3549	3200	2563	2297	2297	2297	2297	2450	2750	3124	
ELEV FTMSL	1350.0	1353.7	1355.0	1355.2	1355.2	1355.2	1355.2	1351.0	1342.0	1337.5	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0	
DISCH KCFS	10.0	7.8	11.5	22.1	21.9	24.1	26.4	27.7	27.4	26.8	11.4	7.4	7.7	7.7	11.7	11.3	10.1	
POWER																		
AVE POWER MW		65	97	187	185	204	222	233	227	210	85	55	57	56	87	86	81	
PEAK POW MW		351	355	356	356	356	356	356	342	305	285	285	285	285	297	319	339	
ENERGY GWH	1307.0	23.3	16.3	40.3	133.2	151.5	160.1	173.6	169.0	151.3	63.5	19.7	9.5	10.8	64.4	64.3	56.2	
--GAVINS POINT--																		
NAT INFLOW	1233	85	40	51	118	134	144	82	67	72	103	49	23	26	72	72	97	
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1		
CHAN STOR	-1	4	-7	-20	0	-4	-4	-3	1	1	28	7	-1	0	-7	1	2	
EVAPORATION	47							3	9	11	10	5	2	2	5			
REG INFLOW	14344	321																

TIME OF STUDY 09:30:05

SMTN NAV SEAS 56 DAYS, SP MAR 0 MAY 0
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 21

28FEB12		VALUES IN 1000 AF EXCEPT AS INDICATED															
INT-SUM		15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB
--FORT PECK--																	
NAT INFLOW	5895	212	99	127	513	922	1305	666	295	267	349	172	80	92	251	229	317
DEPLETION	468	-16	-8	-10	62	282	475	215	-12	-126	-66	-27	-12	-14	-94	-107	-74
EVAPORATION	393							24	75	94	82	37	17	20	43		
MOD INFLOW	5034	228	106	137	451	640	830	427	232	299	333	161	75	86	302	336	391
RELEASE	5106	119	56	71	387	523	506	523	523	399	246	119	56	63	523	523	472
STOR CHANGE	72	109	51	65	64	117	324	-96	-291	-99	87	42	20	22	-221	-187	-81
STORAGE	8396	8505	8556	8622	8686	8803	9127	9032	8741	8641	8728	8770	8790	8813	8592	8405	8324
ELEV FTMSL	2195.9	2196.7	2197.0	2197.5	2197.9	2198.7	2200.9	2200.2	2198.3	2197.6	2198.2	2198.5	2198.6	2198.8	2197.3	2196.0	2195.4
DISCH KCFS	8.5	4.0	4.0	4.0	6.5	8.5	8.5	8.5	8.5	6.7	4.0	4.0	4.0	4.0	8.5	8.5	8.5
POWER																	
AVE POWER MW		46	46	46	76	99	100	100	99	78	47	47	47	47	99	98	97
PEAK POW MW		123	124	125	125	126	129	128	126	125	126	126	126	126	124	122	122
ENERGY GWH	718.6	16.6	7.8	10.0	54.4	73.6	71.8	74.5	74.0	56.1	34.7	16.8	7.9	9.0	73.5	72.8	65.3
--GARRISON--																	
NAT INFLOW	8842	437	204	262	687	1261	2635	1290	430	191	466	177	82	94	161	161	305
DEPLETION	1062	6	3	3	15	186	767	600	111	-140	-25	-120	-56	-64	-102	-74	-49
CHAN STOR	0	51			-28	-23	0	0		20	30				-50		0
EVAPORATION	446							28	87	107	93	42	20	22	48		
REG INFLOW	12440	601	256	330	1031	1575	2374	1185	755	643	674	373	174	199	687	758	826
RELEASE	12532	417	167	214	1190	1414	1369	1230	936	676	676	327	153	175	1045	1045	944
STOR CHANGE	-91	184	90	116	-159	161	1005	-45	-475	-293	-2	46	21	24	-358	-288	-118
STORAGE	10076	10261	10350	10466	10307	10467	11473	11428	10953	10660	10658	10703	10725	10749	10391	10103	9985
ELEV FTMSL	1806.0	1806.9	1807.3	1807.9	1807.1	1807.9	1812.5	1812.3	1810.1	1808.8	1808.8	1809.0	1809.1	1809.2	1807.5	1806.2	1805.6
DISCH KCFS	20.0	14.0	12.0	12.0	20.0	23.0	23.0	20.0	20.0	15.7	11.0	11.0	11.0	11.0	17.0	17.0	17.0
POWER																	
AVE POWER MW		141	121	122	202	231	236	210	208	162	113	113	113	113	173	171	170
PEAK POW MW		356	358	360	357	360	377	376	368	363	363	364	364	365	359	354	352
ENERGY GWH	1547.0	50.6	20.4	26.3	145.2	172.2	170.3	156.0	154.6	116.4	84.0	40.7	19.0	21.7	128.7	127.1	113.9
--OAKE--																	
NAT INFLOW	1272	217	101	130	188	127	282	138	55	72	6	9	4	5	-111	-22	72
DEPLETION	696	24	11	15	50	72	148	178	119	29	-11	1	0	1	13	18	28
CHAN STOR	17	33	11		-43	-16		16		24	26	0	0	0	-33		0
EVAPORATION	395							24	75	94	83	38	18	20	44		
REG INFLOW	12730	642	267	330	1285	1453	1503	1181	1091	909	636	297	139	158	845	1005	988
RELEASE	12824	412	267	360	1195	1412	1433	1704	1386	738	528	266	124	141	951	1023	884
STOR CHANGE	-94	230	0	-30	90	41	69	-523	-295	171	109	31	15	17	-106	-18	104
STORAGE	10598	10829	10828	10798	10888	10930	10999	10476	10181	10352	10460	10491	10506	10523	10417	10400	10504
ELEV FTMSL	1574.5	1575.7	1575.7	1575.5	1576.0	1576.2	1576.6	1573.9	1572.4	1573.3	1573.8	1574.0	1574.1	1574.2	1573.6	1573.5	1574.1
DISCH KCFS	16.0	13.8	19.3	20.2	20.1	23.0	24.1	27.7	22.5	12.4	8.6	8.9	8.9	8.9	15.5	16.6	15.9
POWER																	
AVE POWER MW		149	207	217	216	248	260	297	239	132	92	96	95	95	165	177	170
PEAK POW MW		544	544	543	546	547	549	535	526	531	534	535	535	536	533	533	535
ENERGY GWH	1660.3	53.6	34.8	46.9	155.7	184.2	187.2	220.7	177.5	94.7	68.1	34.4	16.0	18.3	122.7	131.6	113.9
--BIG BEND--																	
EVAPORATION	129							8	24	31	27	12	6	7	14		
REG INFLOW	12695	412	267	360	1195	1412	1433	1696	1362	707	501	254	118	135	937	1023	884
RELEASE	12695	412	267	360	1195	1412	1433	1696	1362	707	501	254	118	135	937	1023	884
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
DISCH KCFS	16.0	13.8	19.3	20.2	20.1	23.0	24.1	27.6	22.1	11.9	8.1	8.5	8.5	8.5	15.2	16.6	15.9
POWER																	
AVE POWER MW		65	90	94	94	107	113	129	105	60	41	43	43	43	77	82	76
PEAK POW MW		518	510	509	509	509	509	509	525	538	538	538	538	538	538	538	529
ENERGY GWH	736.9	23.6	15.2	20.4	67.7	80.0	81.2	96.1	78.5	43.3	30.7	15.6	7.2	8.3	57.1	60.9	51.3
--FORT RANDALL--																	
NAT INFLOW	430	83	39	50	105	74	141	31	18	-12	-37	-16	-7	-8	-49	-25	43
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3
EVAPORATION	126							10	30	31	22	10	5	5	12		
REG INFLOW	12915	493	305	409	1297	1477	1562	1699	1335	652	441	227	106	121	872	995	924
RELEASE	12916	232	159	392	1297	1477	1562	1699	1684	1556	441	227	106	121	719	695	550
STOR CHANGE	-1	261	146	17				0	-349	-903	0	0	0	0	153	300	374
STORAGE	3124	3386	3532	3549	3549	3549	3549	3549	3200	2296	2296	2296	2296	2296	2449	2749	3123
ELEV FTMSL	1350.0	1353.3	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1351.0	1337.5	1337.5	1337.5	1337.5	1337.5	1340.1	1344.8	1350.0
DISCH KCFS	10.1	7.8	11.5	22.0	21.8	24.0	26.3	27.6	27.4	26.1	7.2	7.6	7.6	7.6	11.7	11.3	9.9
POWER																	
AVE POWER MW		65	97	186	184	203	221	233	227	201	53	56	56	56	87	86	79
PEAK POW MW		350	355	356	356	356	356	356	342	284	285	285	285	285	297	319	339
ENERGY GWH	1270.8	23.3	16.2	40.1	132.7	151.0	159.5	173.3	168.8	144.6	39.1	20.2	9.4	10.7	64.4	64.3	53.2
--GAVINS POINT--																	
NAT INFLOW	1284	88	41	53	123	139	150	85	69	75	107	51	24	27	75	75	102
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1	
CHAN STOR	-1	4	-7	-20	0	-4	-4	-3	0	2	35	-1	0	0	-8		3
EVAPORATION	47							3	9	11	10	5	2	2	5		
REG INFLOW	14040	325	193	425	1416	1593	1684	1740	1735	1627	572	268	125	143	772	770	654
RELEASE	14040	325	193	425	1416	1593	1684	1740	1722	1601	572	268	125	143	772	770	693
STOR CHANGE									13	26					-39		
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0
DISCH KCFS	12.5	10.9	13.9	23.8	23.8	25.9	28.3	28.3	28.0	26.9	9.3	9.0	9.0	9.0	12.5	12.5	12.5
POWER																	
AVE POWER MW		38	49	82	82	88	96	96	96	93	33	32	32	32	45	44	44
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76
ENERGY GWH	587.3	13.8	8.2	17.6	58.7	65.8	69.3	71.6	71.3	67.3	24.7	11.6	5.4	6.2	33.2	33.1	29.6
--GAVINS POINT - SIOUX CITY--																	
NAT INFLOW	977	121	57	73	125	167	91	98	56	49	35	25	11	13	7	21	28
DEPLETION	268	7	3	4	22	36	31	39	37	24	11	6	3	3	13	14	15
REGULATED FLOW AT SIOUX CITY	14749	440	247	494	1519	1724	1744	1799	1741	1626	596	286	134	153	766	777	706
RAF		14.8	17.8	27.7	25.5	28.0	29.3	29.3	28.3	27.3	9.7	9.6	9.6	9.6	12.4	12.6	12.7
KCFS																	
--TOTAL--																	
NAT INFLOW	18700	1158	540	694	1741	2690	4604	2308	923	642	926	417	195	222	334	439	867
DEPLETION	2685	21	10	13	156	604	1457	1089	280	-211	-89	-133	-62	-78	-157	-145	-77
CHAN STOR	12	88	4	-20	-71	-43	-4	13	0	41	92	-1	0	0	-90	1	3
EVAPORATION	1537							97	300	368	317	144	67	77	167		
STORAGE	34175	34959	35246	35414	35409	35728	37127	36464	35067	33967	34160						

DATE OF STUDY 12/28/08

2008-2009 AOP EXTENSIONS, LOWER DECILE RUNOFF SIMULATION 99001 9901 9901 PAGE

1

TIME OF STUDY 09:30:05

SHTN NAV SEAS 55 DAYS, SP MAR 0 MAY 0
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 22

	28FEB13	VALUES IN 1000 AF EXCEPT AS INDICATED															2014			
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB			
--FORT PECK--																				
NAT INFLOW	5983	214	100	129	521	936	1324	676	299	271	355	175	81	93	255	233	321			
DEPLETION	503	-17	-8	-10	62	283	479	222	-8	-126	-68	-27	-13	-14	-97	-107	-47			
EVAPORATION	397							24	76	95	83	38	18	20	43					
MOD INFLOW	5083	232	108	139	459	653	845	430	231	302	340	164	76	87	309	340	368			
RELEASE	5058	119	56	71	238	369	536	553	553	411	277	134	62	71	553	553	500			
STOR CHANGE	25	113	53	68	221	284	309	-124	-323	-109	63	30	14	16	-245	-213	-132			
STORAGE	8324	8437	8490	8557	8778	9062	9372	9248	8925	8816	8879	8909	8923	8939	8694	8481	8349			
ELEV FTMSL	2195.4	2196.2	2196.6	2197.0	2198.5	2200.5	2202.5	2201.7	2199.5	2198.8	2199.2	2199.4	2199.5	2199.6	2198.0	2196.5	2195.6			
DISCH KCFS	8.5	4.0	4.0	4.0	4.0	6.0	9.0	9.0	9.0	6.9	4.5	4.5	4.5	4.5	9.0	9.0	9.0			
POWER																				
AVE POWER MW		46	46	46	47	70	106	107	106	81	53	53	53	53	105	104	103			
PEAK POW MW		123	123	124	126	128	131	130	127	126	127	127	127	127	125	123	122			
ENERGY GWH	715.4	16.6	7.8	10.0	33.6	52.4	76.6	79.4	78.8	58.2	39.3	19.0	8.9	10.2	78.1	77.3	69.3			
--GARRISON--																				
NAT INFLOW	9140	452	211	271	710	1303	2723	1334	444	198	482	182	85	97	167	167	315			
DEPLETION	1074	6	3	3	15	185	777	616	117	-143	-30	-124	-58	-66	-104	-75	-49			
CHAN STOR	-5	51				-22	-33			23	27				-50					
EVAPORATION	464							29	90	111	96	44	20	23	50					
REG INFLOW	12655	616	263	339	933	1465	2448	1242	790	664	719	396	185	211	725	795	864			
RELEASE	12617	387	167	196	655	1107	1309	1353	1353	958	738	357	167	190	1107	1353	1222			
STOR CHANGE	38	229	97	142	278	358	1139	-110	-563	-294	-19	39	18	21	-382	-557	-358			
STORAGE	9985	10214	10311	10453	10732	11090	12229	12118	11556	11262	11243	11282	11300	11321	10939	10381	10023			
ELEV FTMSL	1805.6	1806.7	1807.2	1807.8	1809.1	1810.8	1815.7	1815.2	1812.8	1811.5	1811.4	1811.6	1811.7	1811.8	1810.1	1807.5	1805.8			
DISCH KCFS	17.0	13.0	12.0	11.0	11.0	18.0	22.0	22.0	22.0	16.1	12.0	12.0	12.0	12.0	18.0	22.0	22.0			
POWER																				
AVE POWER MW		130	121	112	113	185	232	236	233	169	126	126	126	126	187	224	220			
PEAK POW MW		356	357	360	364	370	388	387	378	373	373	373	374	374	368	358	352			
ENERGY GWH	1585.1	46.9	20.4	24.1	81.1	137.9	166.9	175.3	173.4	121.7	93.5	45.3	21.1	24.2	139.0	166.5	147.8			
--OAH--																				
NAT INFLOW	1295	221	103	132	192	130	287	141	56	73	6	9	4	5	-113	-23	73			
DEPLETION	709	24	11	15	50	73	151	182	122	30	-11	1	0	1	13	18	29			
CHAN STOR	-27	22	5	5		-38	-22			34	23				-33	-22	0			
EVAPORATION	374							23	70	89	79	36	17	19	42					
REG INFLOW	12802	605	264	320	797	1125	1423	1289	1217	946	699	329	153	175	905	1289	1266			
RELEASE	12762	352	254	359	1191	1408	1426	1702	1387	754	546	265	124	141	947	1024	882			
STOR CHANGE	40	253	10	-39	-394	-282	-3	-413	-171	193	153	63	30	34	-41	266	384			
STORAGE	10504	10757	10767	10727	10333	10051	10048	9634	9464	9656	9809	9873	9902	9936	9894	10160	10544			
ELEV FTMSL	1574.1	1575.3	1575.4	1575.2	1573.2	1571.7	1571.7	1569.4	1568.5	1569.5	1570.4	1570.7	1570.9	1571.1	1570.8	1572.3	1574.3			
DISCH KCFS	15.9	11.8	18.3	20.1	20.0	22.9	24.0	27.7	22.6	12.7	8.9	8.9	8.9	8.9	15.4	16.7	15.9			
POWER																				
AVE POWER MW		127	197	216	213	241	251	287	232	131	93	93	93	94	161	175	169			
PEAK POW MW		542	542	541	531	523	523	511	506	512	516	518	519	520	519	526	537			
ENERGY GWH	1619.6	45.7	33.0	46.6	153.6	179.4	180.8	213.8	172.8	94.3	68.9	33.6	15.7	18.0	119.9	130.1	113.3			
--BIG BEND--																				
EVAPORATION	129						8	24	31	27	12	6	7	14						
REG INFLOW	12633	352	254	359	1191	1408	1426	1694	1363	723	519	253	118	135	933	1024	882			
RELEASE	12633	352	254	359	1191	1408	1426	1694	1363	723	519	253	118	135	933	1024	882			
STOR CHANGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621			
STORAGE	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0			
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0			
DISCH KCFS	15.9	11.8	18.3	20.1	20.0	22.9	24.0	27.6	22.2	12.1	8.4	8.5	8.5	8.5	15.2	16.7	15.9			
POWER																				
AVE POWER MW		56	86	94	94	107	112	129	106	61	43	43	43	43	76	82	76			
PEAK POW MW		518	510	509	509	509	509	509	525	538	538	538	538	538	538	538	529			
ENERGY GWH	733.4	20.2	14.4	20.3	67.4	79.7	80.8	96.0	78.5	44.2	31.8	15.5	7.2	8.3	56.8	60.9	51.2			
--FORT RANDALL--																				
NAT INFLOW	447	87	40	52	108	77	147	32	19	-13	-38	-16	-7	-9	-51	-26	45			
DEPLETION	79	1	1	1	3	9	12	18	15	7	1	1	0	1	3	3	3			
EVAPORATION	126							10	30	31	22	10	5	5	12					
REG INFLOW	12870	437	294	410	1296	1476	1561	1698	1337	667	458	226	105	120	866	995	924			
RELEASE	12870	173	149	393	1296	1476	1561	1698	1683	1573	458	226	105	120	713	695	550			
STOR CHANGE	0	265	144	17	0	0	0	-346	-906	0	0	0	0	0	153	300	374			
STORAGE	3123	3388	3532	3549	3549	3549	3549	3549	3203	2296	2296	2296	2296	2296	2449	2749	3123			
ELEV FTMSL	1350.0	1353.3	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1351.0	1337.5	1337.5	1337.5	1337.5	1337.5	1340.1	1344.8	1350.0			
DISCH KCFS	9.9	5.8	10.8	22.0	21.8	24.0	26.2	27.6	27.4	26.4	7.5	7.6	7.6	7.6	11.6	11.3	9.9			
POWER																				
AVE POWER MW		48	91	186	184	203	221	233	227	203	55	56	56	56	86	86	79			
PEAK POW MW		350	355	356	356	356	356	356	342	284	285	285	285	285	297	319	339			
ENERGY GWH	1266.0	17.4	15.3	40.2	132.6	150.9	159.4	173.2	168.7	146.3	40.7	20.1	9.4	10.7	63.8	64.3	53.2			
--GAVINS POINT--																				
NAT INFLOW	1297	89	42	5																

DATE OF STUDY 12/28/08

2008-2009 AOP EXTENSIONS, LOWER DECILE RUNOFF SIMULATION 99001 9901 9901 PAGE 1

TIME OF STUDY 09:30:05

SHTN NAV SEAS 55 DAYS, SP MAR 0 MAY 0
VALUES IN 1000 AF EXCEPT AS INDICATED

STUDY NO 23

	28FEB14	VALUES IN 1000 ACRE-FT AS INDICATED												2015					
	INI-SUM	15MAR	22MAR	31MAR	30APR	31MAY	30JUN	31JUL	31AUG	30SEP	31OCT	15NOV	22NOV	30NOV	31DEC	31JAN	28FEB		
--FORT PECK--																			
NAT INFLOW	6017	216	101	129	524	942	1331	680	301	273	356	176	82	94	256	234	323		
DEPLETION	487	-17	-8	-10	61	283	483	229	-3	-126	-70	-28	-13	-15	-97	-108	-74		
EVAPORATION	368							24	76	95	83	24	11	13	43				
MOD INFLOW	5162	233	109	140	463	659	848	427	228	304	343	179	84	96	310	342	397		
RELEASE	5115	119	56	71	357	492	476	492	492	438	307	149	69	79	523	523	472		
STOR CHANGE	47	114	53	68	106	167	372	-65	-264	-133	36	31	14	16	-213	-181	-75		
STORAGE	8349	8463	8517	8585	8691	8858	9230	9165	8901	8768	8804	8834	8848	8865	8652	8471	8396		
ELEV FTMSL	2195.6	2196.4	2196.8	2197.2	2198.0	2199.1	2201.6	2201.1	2199.4	2198.5	2198.7	2198.9	2199.0	2199.1	2197.7	2196.4	2195.9		
DISCH KCFS	9.0	4.0	4.0	4.0	6.0	8.0	8.0	8.0	8.0	7.4	5.0	5.0	5.0	5.0	8.5	8.5	8.5		
POWER																			
AVE POWER MW		46	46	46	70	93	94	95	94	86	58	59	59	59	99	98	97		
PEAK POW MW		123	124	124	125	127	130	129	127	126	126	127	127	127	125	123	122		
ENERGY GWH	721.7	16.6	7.8	10.0	50.2	69.4	67.8	70.4	70.0	61.9	43.5	21.1	9.8	11.3	73.6	73.0	65.5		
--GARRISON--																			
NAT INFLOW	9260	457	213	274	720	1320	2759	1351	451	200	488	185	86	98	169	169	319		
DEPLETION	1144	6	3	4	16	185	787	636	101	-145	-34	-118	-55	-63	-88	-57	-34		
CHAN STOR	6	57			-22	-22					26			0	-39		0		
EVAPORATION	427							28	89	110	95	27	13	15	50				
REG INFLOW	12810	627	266	342	1039	1604	2448	1179	753	680	760	424	198	226	691	749	825		
RELEASE	12758	387	167	214	1131	1414	1309	1107	1107	1023	738	357	167	190	1107	1230	1111		
STOR CHANGE	52	240	99	128	-92	190	1139	72	-354	-343	22	67	31	36	-416	-481	-286		
STORAGE	10023	10263	10362	10490	10398	10588	11727	11799	11445	11101	11124	11191	11222	11258	10842	10361	10075		
ELEV FTMSL	1805.8	1806.9	1807.4	1808.0	1807.6	1808.5	1813.6	1813.9	1812.3	1810.8	1810.9	1811.2	1811.3	1811.5	1809.6	1807.4	1806.0		
DISCH KCFS	22.0	13.0	12.0	12.0	19.0	23.0	22.0	18.0	18.0	17.2	12.0	12.0	12.0	12.0	18.0	20.0	20.0		
POWER																			
AVE POWER MW		131	121	122	192	232	228	191	190	180	125	125	126	126	186	203	200		
PEAK POW MW		356	358	360	359	362	381	382	376	370	371	372	372	373	366	358	353		
ENERGY GWH	1589.4	47.0	20.4	26.3	138.3	172.9	164.1	142.0	141.3	129.3	93.1	45.1	21.1	24.1	138.6	151.2	134.6		
--OAHE--																			
NAT INFLOW	1305	222	104	133	193	130	289	142	57	74	6	9	4	5	-113	-23	74		
DEPLETION	724	25	12	15	51	75	154	187	125	30	-12	1	0	1	13	19	29		
CHAN STOR	11	49	5		-38	-22	5	21		5	29				-33	-11			
EVAPORATION	358							24	73	91	81	23	11	12	43				
REG INFLOW	12992	633	264	333	1235	1448	1449	1059	966	980	704	341	159	182	905	1177	1156		
RELEASE	12939	408	265	357	1188	1406	1423	1700	1383	775	674	251	119	136	948	1024	882		
STOR CHANGE	53	225	-1	-24	47	42	26	-641	-418	206	30	90	40	46	-43	153	274		
STORAGE	10544	10769	10768	10744	10791	10833	10859	10219	9801	10007	10037	10127	10167	10213	10170	10323	10597		
ELEV FTMSL	1574.3	1575.4	1575.4	1575.3	1575.5	1575.7	1575.9	1572.6	1570.3	1571.4	1571.6	1572.1	1572.3	1572.5	1572.3	1573.1	1574.5		
DISCH KCFS	15.9	13.7	19.1	20.0	20.0	22.9	23.9	27.6	22.5	13.0	11.0	8.4	8.6	8.6	15.4	16.7	15.9		
POWER																			
AVE POWER MW		147	205	215	214	246	257	294	235	136	115	89	91	91	163	176	169		
PEAK POW MW		542	542	542	543	544	545	527	516	522	523	525	526	527	526	530	538		
ENERGY GWH	1664.8	53.0	34.5	46.3	154.4	182.8	185.2	218.7	175.2	98.2	85.8	32.1	15.3	17.4	121.1	131.0	113.7		
--BIG BEND--																			
EVAPORATION	120						8	24	31	27	8		4	4	14				
REG INFLOW	12819	408	265	357	1188	1406	1423	1692	1359	744	647	243	116	132	934	1024	882		
RELEASE	12819	408	265	357	1188	1406	1423	1692	1359	744	647	243	116	132	934	1024	882		
STORAGE	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621	1621		
ELEV FTMSL	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0		
DISCH KCFS	15.9	13.7	19.1	20.0	20.0	22.9	23.9	27.5	22.1	12.5	10.5	8.2	8.3	8.3	15.2	16.7	15.9		
POWER																			
AVE POWER MW		65	90	94	93	107	112	129	105	63	53	41	42	42	76	82	76		
PEAK POW MW		518	510	509	509	509	509	509	525	538	538	538	538	538	538	538	529		
ENERGY GWH	744.5	23.4	15.0	20.2	67.3	79.6	80.6	95.8	78.3	45.5	39.6	14.9	7.1	8.1	56.9	60.9	51.2		
--FORT RANDALL--																			
NAT INFLOW	453	88	41	53	110	78	149	33	19	-13	-39	-16	-7	-9	-52	-26	45		
DEPLETION	79	1		1	3	9	12	18	15	7	1	1	0	1	3	3			
EVAPORATION	119							10	30	31	22	6	3	3	12				
REG INFLOW	13070	494	305	408	1295	1475	1560	1697	1333	688	584	220	105	120	866	995	924		
RELEASE	13070	232	159	391	1295	1475	1560	1697	1682	1592	584	220	105	120	713	695	550		
STOR CHANGE	0	262	147	17			0	0	-349	-903	0	0	0	0	153	300	374		
STORAGE	3123	3385	3532	3549	3549	3549	3549	3549	3200	2297	2296	2296	2296	2296	2449	2749	3123		
ELEV FTMSL	1350.0	1353.3	1355.0	1355.2	1355.2	1355.2	1355.2	1355.2	1351.0	1337.5	1337.5	1337.5	1337.5	1337.5	1340.2	1344.8	1350.0		
DISCH KCFS	9.9	7.8	11.4	21.9	21.8	24.0	26.2	27.6	27.4	26.7	9.5	7.4	7.6	7.5	11.6	11.3	9.9		
POWER																			
AVE POWER MW		65	96	185	184	203	221	233	227	205	70	54	55	55	86	86	79		
PEAK POW MW		350	355	356	356	356	356	356	342	284	285	285	285	285	297	319	339		
ENERGY GWH	1284.3	23.3	16.2	40.0	132.5	150.8	159.3	173.1	168.6	147.9	51.8	19.6	9.3	10.6	63.8	64.3	53.2		
--GAVINS POINT--																			
NAT INFLOW	1303	90	42	54	125	141	152	87	71	76	108	52	24	27	76	76	103		
DEPLETION	112	0	0	0	4	19	24	39	10	-5	1	5	2	3	10	1			
CHAN STOR	-1	4	-7	-20	0	-4	-4	-3	0	1	32	4	0	0	-8	1	3		
EVAPORATION	44							3	9	11	10	3	1	2	5				
REG INFLOW	14216	326	194	425	1416	1593	1684	1740	1735	1662	713	268	125	143	766	770	655		
RELEASE	14216	326	194	425	1416	1593	1684	1740	1722	1636	713	268	125	143	766	770	694		
STOR CHANGE									13	26							-39		
STORAGE	358	358	358	358	358	358	358	358	371	397	397	397	397	397	397	397	358		
ELEV FTMSL	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.0	1206.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1207.5	1206.0		
DISCH KCFS	12.5	11.0	13.9	23.8	23.8	25.9	28.3	28.3	28.0	27.5	11.6	9.0	9.0	9.0	12.5	12.5	12.5		
POWER																			
AVE POWER MW		38	49	82	82	88	96	96	96	95	41	32	32	32	44	45	44		
PEAK POW MW		114	114	114	114	114	114	114	115	117	117	117	117	117	78	78	76		
ENERGY GWH	594.7	13.8	8.2	17.6	58.7	65.8	69.3	71.6	71.3	68.7	30.7	11.6	5.4	6.2	32.9	33.1	29.6		
--GAVINS POINT - SIOUX CITY--																			
NAT INFLOW	1062		62	79	136	182	99	106	61	53	38	27	12	14	8	23	30		
DEPLETION	276		3	4	23	36	32</												